


Food & Beverage

A guide to products and services



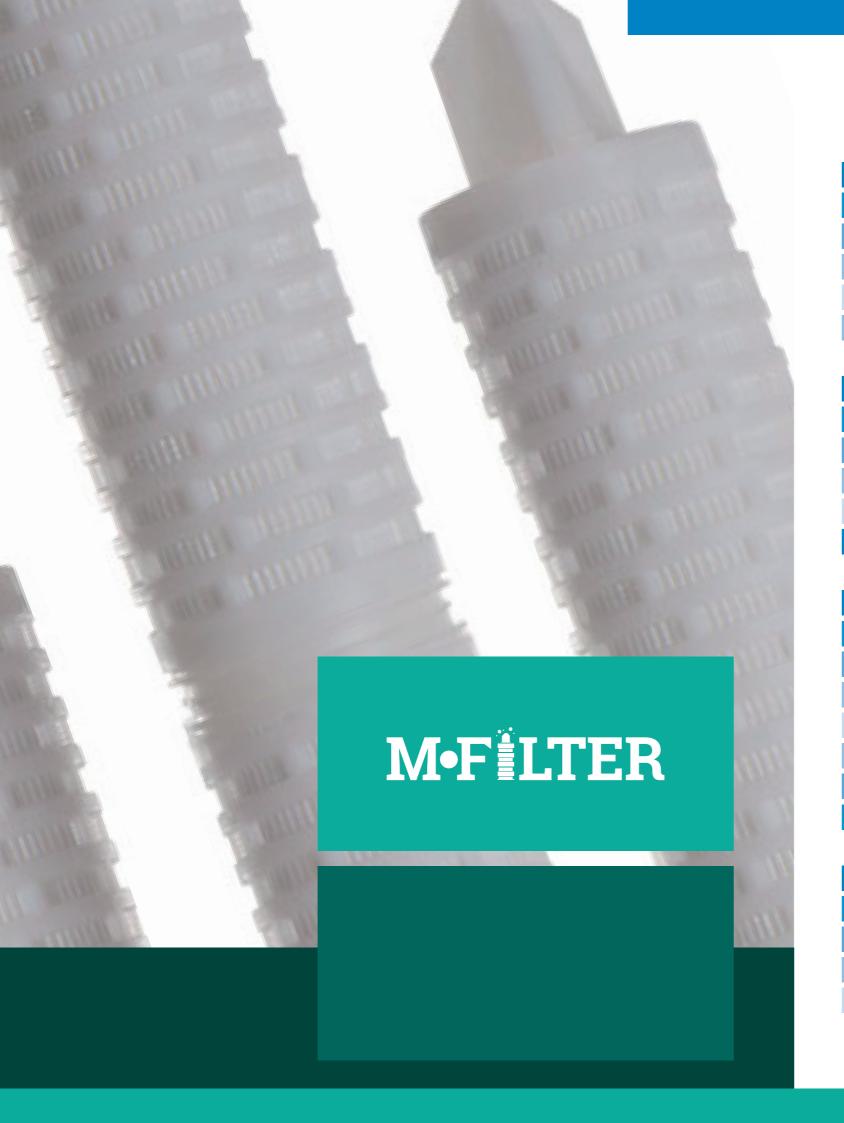

Contents

Wine
10-11
12-13
14-15
18-19

www.parker.com/dhwine		
BEVPOR PS	Final Stabilization	
BEVPOR PW	Final Stabilization	
BEVPOR PH	Final Stabilization	
PREPOR NG	Pre-stabilization	
PEPLYN TF	Clarification	



Brewing	
24-25	
26-27	
28-29	
32-33	

www.parker.com/dhbeer	
BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization
PEPLYN TF	Clarification



Bottled Water
38-39
40-41
42-43
44-45
46-47
48-49
50-51

www.parker.com	m/dhbottledwater
BEVPOR MS	Final Sterilization
BEVPOR MW	Final Sterilization
BEVPOR MH	Final Sterilization
BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
DDEDOD NO	Dro stabilization



Cider	
54-55	
56-57	
58-59	
60-61	

www.parker.cor	n/dhcider
BEVPOR PS	Final Stabilization
BEVPOR PW	Final Stabilization
BEVPOR PH	Final Stabilization
PREPOR NG	Pre-stabilization



Contents

64-65 66-67
10 10
68-69
70-71
72-73
74-75
76-77
78-79
80-81
82-83
84-85
86-87
88-89
90-91
92-93
94-97

CRYPTOCLEAR PES	Final Stabilization
CRYPTOCLEAR PLUS	Pre-stabilization
PREPOR PP	Pre-stabilization
PEPLYN PLUS	Pre-stabilization
PEPLYN HD	Clarification
PEPLYN HA	Clarification
PROPLEAT PP	Clarification
PARMAX	Clarification
MAXGUARD	Clarification
BAG FILTERS	Clarification
BEVPOR WG	Final Sterilization
BEVPOR MS	Final Sterilization
SPUNFLOW QN	Clarification
SPUNFLOW QA	Clarification
CARBOFLOW MX	Dechlorination
STEAM FILTERS	Clarification

Air & Gas	
100-101	
102-103	
104-105	
106-107	
108-109	
110-111	

HIGH FLOW BIO-X	Gas Sterilization
BIO-X II	Gas Sterilization
TETPOR AIR	Gas Sterilization
HIGH FLOW TETPOR II	Gas Sterilization
HIGH FLOW PREPOR GFA	Gas Prefiltration
PEPLYN AIR	Gas Prefiltration

Instruments
114-115
116-117

Valairdata 3	Integrity Test Unit	
Bevcheck & Bevcheck Plus	Integrity Test Units	

Filter Housings	
120-123	
124-128	
130-133	
134-135	
136-139	
140-141	
142-144	
1/4-1/7	

HIL	Coarse Utility - Liquid
HIL Multi	Coarse Utility - Liquid
HSL Single	Sanitary Beverage
VSH Multi	Sanitary Beverage
HBA	Air & Gas
HPG Enhanced Plus	High Pressure Air & Gas
HSV	Vent Applications
VIS	High Flow Steam

Additional Support
148-149
150-151
152-153
154-157
158

End Cap Styles and Dimensions
Conversion Tables
Installation and Operating Guidelines
Glossary of Terms used in Filtration
Supporting documents and video







Parker domnick hunter commitments

Wine collection

Old and new world producers of wine have partnered with Parker domnick hunter to reach their quality and production requirements.

A proven product range combined with knowledgeable specialists of the wine making process enables Parker domnick hunter to provide value added solutions that guarantee both quality, and process efficiencies.

Parker domnick hunter provides local application specialists focussed on providing added value solutions to winemakers and contract packagers. The local team is supported by innovative products, state of the art manufacturing facilities and international support teams, all aimed at providing solutions which match Parker domnick hunter's capabilities with the needs of the producer. The ultimate aim is to offer producers greater control of their process, leading to consistent quality and improved operational efficiency.



Specialized Wine Applications

- 1 Final Stabilization
- 2 Pre-stabilization
- 3 Clarification
- 4 Sterilization of Gases
- 5 Water Utilities
- 6 Gas Utilities

Specific filtration requirements within the wine making, transportation and packaging processes dictate different design criteria for filter systems. Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of wine production, stabilization and packaging operations.

BEVPOR PS Wine Filter Cartridges









BEVPOR PS wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost-effective solution to wine microbial stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert materials of construction
- Easily integrity tested in-situ


Benefits

- I Ensures effective microbial stabilization of wine
- I Preserves the desirable characteristics of the wine
- Assured filtration performance

Performance Characteristics



Filtration Stage

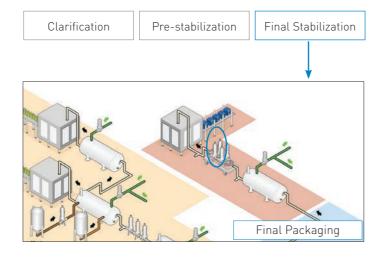





Specifications

Materials of Construction

I Filtration Membrane:

I Upstream Support: Polyester Polyester ■ Downstream Support: I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel O-rings: Silicone / EPDM

Polyethersulphone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following

Temperature		Max Forward dF		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PS filters have been validated by challenges performed with the following organisms.

I DV when shallenged with a

Organism	minimum	of 10^7	cfu per c	m
	(0.45	0.65	1.
<u> </u>		-0	-D	_
Saccharomyces cere	<i>visiae</i> 1	=R	FR	F
Brettanomyces brux	ellensis [-R	FR	F
Lactobacillus brevis	F	-R	FR	2.
Acetobacter oeni	F	-R	FR	7.
Pseudomonas aerug	inosa 9	7.1	8.9	4.
Serratia marcescens		-R	FR	2.

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >107 per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters		n Ratii 0.65	_
Test Pressure (barg) Test Pressure (psig)	1.4 20.0	1.0 15.0	0.6 9.0
Max Diffusional Flow per 10" (ml /min)	16.0	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

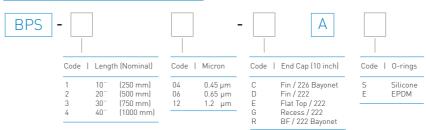

BEVPOR PW Wine Filter Cartridges







BEVPOR PW wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PW filters provide assured performance throughout their service life.

The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a cost-effective solution to wine microbial stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert materials of construction
- I Easily integrity tested in-situ
- I Integral depth prefiltration layer


Benefits

- I Ensures effective microbial stabilization of wine
- I Protects the desirable characteristics of the wine
- Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

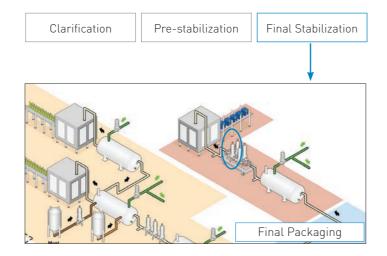





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PW filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²				
		0.45	0.65	1.2	
Saccharomyces cer	evisiae	FR	FR	FR	
Brettanomyces bru		FR	FR	FR	
Lactobacillus brevis	;	FR	FR	2.0	
Acetobacter oeni		FR	FR	7.6	
Pseudomonas aeru	ginosa	9.1	8.9	4.8	
Serratia marcescen	S	FR	FR	2.4	
*FR - Fully retentive during challenge					

When expressed as titre reduction "FR" equates to >107 per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Micro	- D. I.	
1411010	Micron Rating	
0.45	0.65	1.2
1.4 20.0	1.0 15.0	0.6
16.0	16.0	16.0
	0.45 1.4 20.0	0.45 0.65 1.4 1.0 20.0 15.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

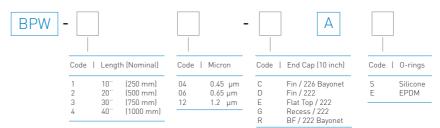

BEVPOR PHWine

Filter Cartridges





BEVPOR PH wine filters protect the unique characteristics of wine by removing yeast and other spoilage organisms to ensure microbial stabilization prior to packaging.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms whilst preserving the wine's unique properties to ensure it reaches the consumer as the wine maker intended. Combined with hydrophilic properties for easy integrity testing, BEVPOR PH filters provide assured performance throughout their service life.


The incorporation of an integral prefilter layer, combined with an increased filtration area provides high wine flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to the microbial stabilization of wine by providing increased process control with maximized operational efficiency.

Features

- I Validated retention to spoilage organisms
- I Inert materials of construction
- Easily integrity tested in-situ
- I Integral depth prefiltration layer
- I High filtration area


Performance Characteristics



Benefits

- I Ensures effective microbial stabilization of wine
- I Protects the desirable characteristics of the wine
- Assured filtration performance
- I Increased throughput to blockage
- I High wine flow and maximized operational efficiency

Filtration Stage

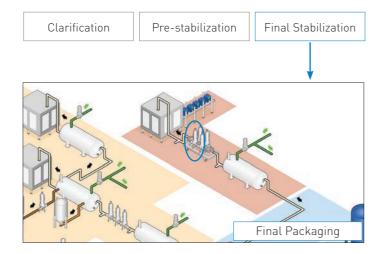





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone ■ Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	Temperature		rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PH filters have been validated by challenges performed with the following organisms.

Urganism	minimum o	en challenged with a m of 10 ⁷ cfu per cm ² 0.45 0.65 1.2		
	0	45 0.6	35 1.2	
Saccharomyces cerev	risiae FF	R FF	R FR	
Brettanomyces bruxe	llensis FF	R FR	R FR	
Lactobacillus brevis	FF	R FR	2.0	
Acetobacter oeni	FF	R FR	7.6	
Pseudomonas aerugi	nosa 9.	1 8.9	9 4.8	
Serratia marcescens	FF	R FF	2.4	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Ratii	ng
Test Parameters	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig)	20.0	15.0	9.0
Max Diffusional			
Flow per 10" (ml/min)	21.0	21.0	21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

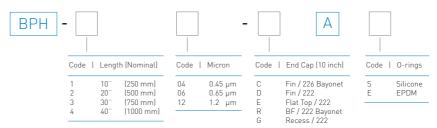







Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range of prefilters for the clarification and pre-stabilization stages of wine processing and packaging.

The control of particulate and microbial loading is important to provide stability to wine during storage and transport and to ensure that the finished product maintains and develops its desirable characteristics after packaging.

Parker domnick hunter's next generation of PREPOR NG filters have been developed to remove yeast and reduce bacterial loading to improve short-term stability and to increase the service life of downstream membrane filters. The robust componentry allows for caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to intermediate stabilization


Features

- I Fully validated yeast removal and bacterial reduction
- I Truly optimized graded density using unique Optimized Depth Construction (ODC) Technology
- I Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash


Benefits

- I Effective control of clarity and microbial stability
- I Increased filtration capacity
- I Increased service life when combined with regular CIP regeneration

Performance Characteristics



Filtration Stage

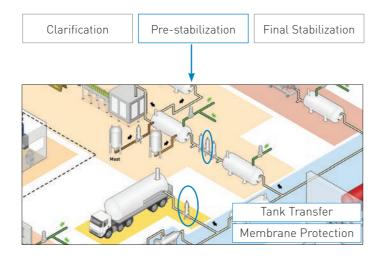





Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward d		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics

The absolute retention characteristics of PREPOR NG filters have been validated by challenges performed with the following organisms.

Organism	LRV whe	en challe m of 10 ⁷	nged wi cfu per	th a cm²
		Α	В	D
Saccharomyces ce	revisiae	FR	FR	FR
Brettanomyces bru	uxellensis	FR	FR	FR
Oenococcus oenos		4.0	3.0	1.0
Acetobacter oeni		2.0	2.0	1.7
Serratia marcesce	ns	3.9	3.4	1.9


*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10''module.

Manufacturing Traceability


Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Performance Benefits



ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

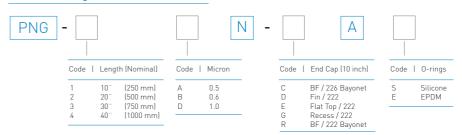









PEPLYN TF filters have been specifically designed to protect wine from residual particulate which can remain following primary clarification processes. By combining absolute particle retention, high dirt holding capacity and resistance to blockage with ease of regeneration, PEPLYN TF filters provide the optimum solution for trap filtration.

The carefully constructed polypropylene media ensures insoluble particulate is captured on the surface of the filtration media, in a way that it can be easily removed through backwashing. This feature, combined with the strong, rigid construction provides reliable filtration performance over extended operational lifetimes.


Features

- I Robust polypropylene construction designed for chemical CIP and backwash
- I High effective filtration area
- A range of absolute retention ratings


Benefits

- I Extended service life when combined with regular CIP regeneration
- I High wine flow and resistance to blockage under high loading conditions
- I Defined cut-off to powders and flexibility to optimize the filtration

Performance Characteristics



Filtration Stage

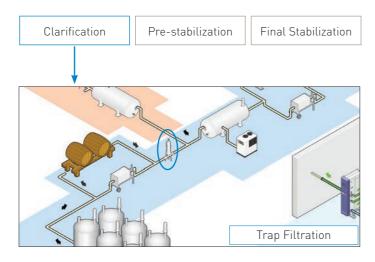





Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene Polypropylene ■ Downstream Support: I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel O-rings: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following

Temperature		Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPLYN TF cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics


The retention characteristics of PEPLYN TF filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Micron Rating at various efficiencies						
Efficiency	>99.99%	99.98%	99.90%	99%	95%	90%
Beta Ratio	10000	5000	1000	100	20	10
Н	5.00	4.70	4.50	3.50	2.30	1.00
K	10.00	8.00	7.00	4.80	3.80	2.80
L	15.00	12.00	10.00	7.20	6.00	4.50

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

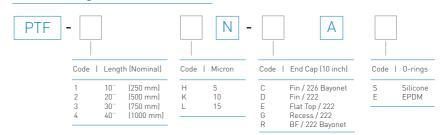






Parker domnick hunter commitments

Brewing collection

Large multinational corporations, regional brewers and micro-brewers alike have partnered with Parker domnick hunter to successfully reach their quality and production requirements.

At the heart of the brewing process lies a totally natural sequence of events – the anaerobic fermentation of malted barley by yeast. In order to consistently produce the perfect brew, the fermentation, stabilization and packaging stages need to be closely controlled. Each stage of the process typically requires dedicated technology and equipment and there is a huge range of choice and flexibility in approaches.

Parker domnick hunter provide tailored filtration solutions which meet specific performance criteria. Through a structured program of technical analysis available from a network of international support hubs, we work with end users to achieve their goals. By combining specialist brewing knowledge with a dedicated product range, we deliver the Parker domnick hunter commitments of; protecting beer quality, reducing processing costs and providing specialist support.

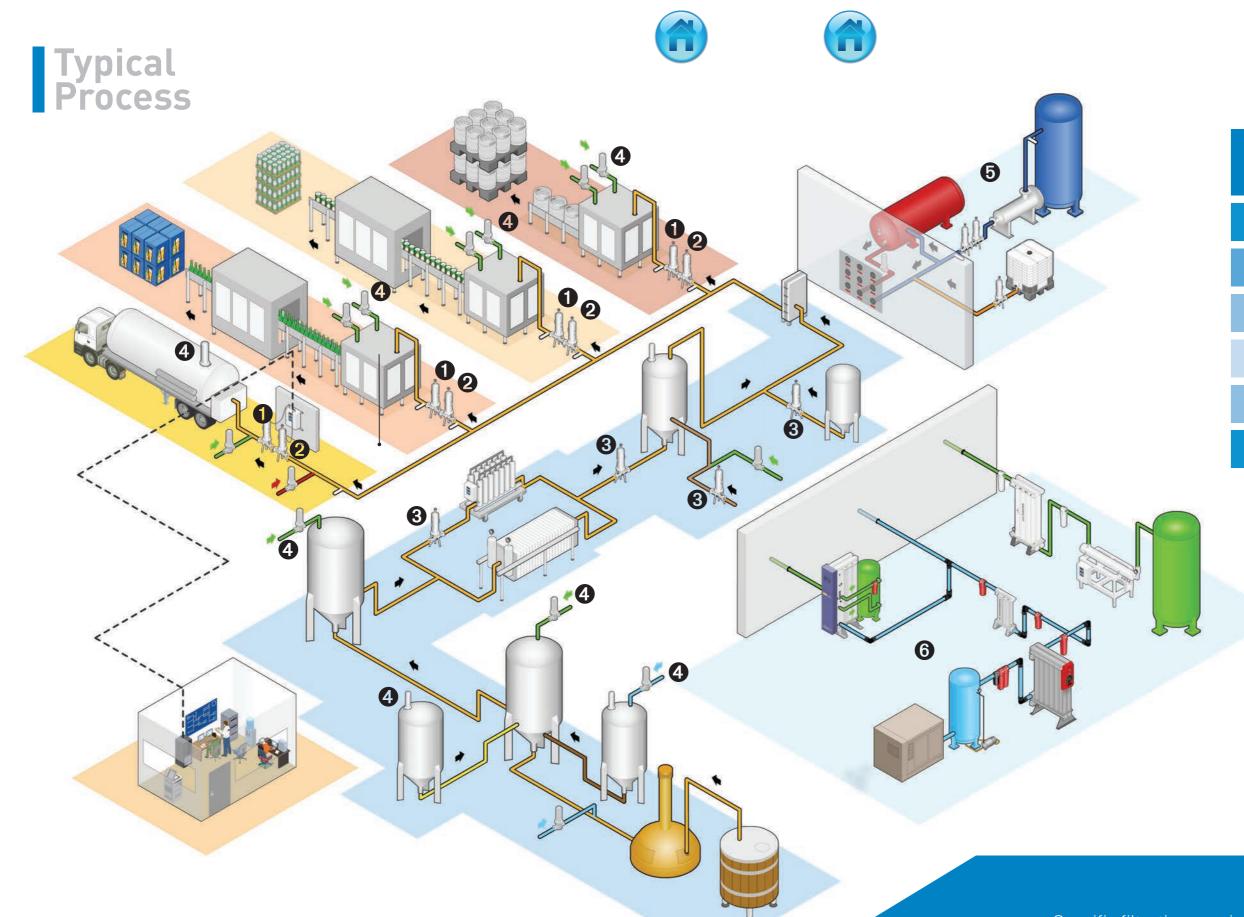

Specialized Brewing Applications

- 1 Cold Stabilization
- 2 Pre-stabilization
- 3 Trap Filtration
- 4 Sterilization of Gases
- **5** Water Utilities
- 6 Gas Utilities

Specific filtration requirements within the brewery dictate different design criteria for the filter systems.

Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of beer production, stabilization and packaging operations.

BEVPOR PS Brewing Filter Cartridges

M•F LTER





BEVPOR PS beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a cost effective solution to beer stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert material of construction
- Easily integrity tested in-situ


Benefits

- I Ensures effective microbial stabilization of beer
- I Preserves the organoleptic qualities of the beer
- Assured filtration performance

Performance Characteristics



Filtration Stage

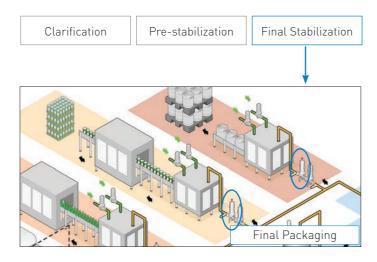





Specifications

Materials of Construction

I Filtration Membrane:

I Upstream Support: Polyester ■ Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Polyethersulphone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following

Temperature °C °F		Max Fo	rward dP (psi)
	'	(Dai)	(hai)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PS filters have been validated by challenges performed with the following organisms.

Organism	LRV who	en challenged with a cum of 107 cfu per cm 0.45 0.65 FR 9.1 8.9	
		0.45	0.65
Saccharomyces ce	revisiae	FR	FR
Brettanomyces bru	ıxellensis	FR	FR
Lactobacillus brevi	is	FR	FR
Acetobacter oeni		FR	FR
Pseudomonas aer	uginosa	9.1	8.9
Serratia marcesce	ns	FR	FR

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >107 per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Rating
Test Parameters	0.45	0.65
Test Pressure (barg)	1.4	1.0
Test Pressure (psig) Max Diffusional	20.0	15.0
Flow per 10" (ml/min)	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

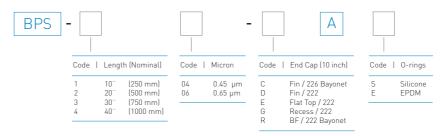

BEVPOR PW Brewing Filter Cartridges





BEVPOR PW beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.

The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a costeffective solution to beer stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert material of construction
- I Easily integrity tested in-situ
- I Integral depth prefiltration layer


Benefits

- I Ensures effective microbial stabilization of beer
- I Preserves the organoleptic qualities of the beer
- I Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

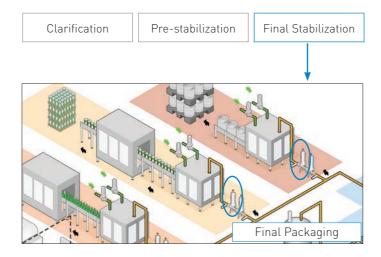





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatu	Temperature		Max Forward dP	
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PW filters have been validated by challenges performed with the following organisms.

Organism	LRV whe	n challen n of 10 ⁷ c	ged with fu per cr	n
		0.45	0.65	
Saccharomyces cere	visiae	FR	FR	
Brettanomyces brux	ellensis	FR	FR	
Lactobacillus brevis		FR	FR	
Acetobacter oeni		FR	FR	
Pseudomonas aerug	ninosa	9.1	8.9	
Serratia marcescens	5	FR	FR	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Rating
Test Parameters	0.45	0.65
Test Pressure (barg)	1.4	1.0
Test Pressure (psig) Max Diffusional	20.0	15.0
Flow per 10" (ml/min)	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

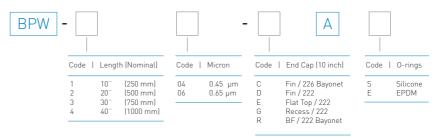

BEVPOR PH Brewing Filter Cartridges





BEVPOR PH beer filters protect the unique characteristics of beer by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the beer's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.


The incorporation of an active prefilter layer, combined with an increased filtration area provides high beer flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to beer stabilization by providing increased process control with maximized operational efficiency.

Features

- I Validated retention to spoilage organisms
- Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- I High filtration area


Performance Characteristics



Benefits

- I Ensures effective microbial stabilization of beer
- I Preserves the organoleptic qualities of the beer
- I Assured filtration performance
- I Increased throughput to blockage
- Maximized operational efficiency

Filtration Stage

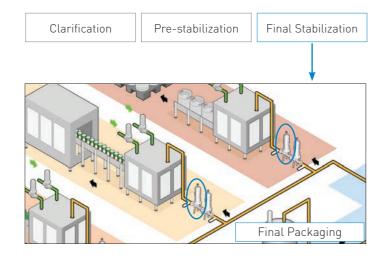





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone ■ Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward d		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PH filters have been validated by challenges performed with the following organisms.

Saccharomyces cerevisiae FR FR Brettanomyces bruxellensis FR FR Lactobacillus brevis FR FR Acetobacter oeni FR FR Pseudomonas aeruginosa 9.1 8.9 Serratia marcescens FR FR	Organism	LRV whe	en challen m of 10 ⁷ c	ged with fu per ci	n a m²
Brettanomyces bruxellensis FR FR Lactobacillus brevis FR FR Acetobacter oeni FR FR Pseudomonas aeruginosa 9.1 8.9			0.45	0.65	
Lactobacillus brevis FR FR Acetobacter oeni FR FR Pseudomonas aeruginosa 9.1 8.9	Saccharomyces c	erevisiae	FR	FR	
Acetobacter oeni FR FR Pseudomonas aeruginosa 9.1 8.9	Brettanomyces bi	ruxellensis	FR	FR	
Pseudomonas aeruginosa 9.1 8.9	Lactobacillus bre	vis	FR	FR	
, seadonnends deragmosd , , ,	Acetobacter oeni		FR	FR	
Serratia marcescens FR FR	Pseudomonas ae	ruginosa	9.1	8.9	
	Serratia marcesc	ens	FR	FR	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >107 per 10" module

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Rating	
Test Parameters	0.45	0.65	
T . D (1)	4 /	4.0	-
Test Pressure (barg)	1.4	1.0	
Test Pressure (psig)	20.0	15.0	
Max Diffusional			
Flow per 10" (ml /min)	21.0	21.0	

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

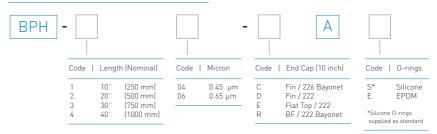







Features

- I Fully validated yeast removal and bacterial reduction
- Truly optimized graded density using unique Optimized Depth Construction Technology
- I Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash

Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range of prefilters to benefit the latter stages of beer stabilization processes.

Following upstream clarification stages there is a need to control the microbial loading of the bright beer before intermediate storage.


The new range of PREPOR NG filters has been specifically developed to remove yeast and particulate such as filter aids and haze components. The superior level of retention ensures that a consistent quality of brew is delivered to bright beer storage whilst also offering a greater level of membrane filter protection during cold stabilization.

The robust componentry is specifically designed to withstand caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to beer stabilization.


Benefits

- I Greater control of beer quality prior to final stabilization processes
- I Increased filtration capacity
- Increased service life when combined with regular CIP regeneration

Performance Characteristics



Filtration Stage

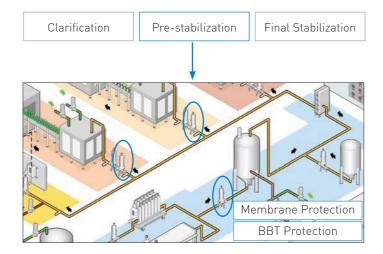





Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics

The absolute retention characteristics of PREPOR NG filters have been validated by challenges performed with the following organisms.

Organism	LRV when challenged with minimum of 10 ⁷ cfu per cm			
		Α	В	D
Saccharomyces ce	revisiae	FR	FR	FR
Brettanomyces bri	uxellensis	FR	FR	FR
Lactobacillus brev	is	FR	FR	2.0
Acetobacter oeni		2.0	2.0	1.7
Serratia marcesce	ากร	3.9	3.4	1.9
*FR - Fully retentive	during challe	enge		

When expressed as titre reduction "FR" equates to


Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.




Optimized Depth Construction (OI provides a unique graded density combining longer service life with absolute filtration efficiency

Performance Benefits



ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

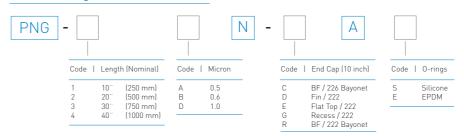

PEPLYN TF



PEPLYN TF filters have been specifically designed to protect beer from the passage of filter aids and lees used in primary clarification processes. By combining absolute particle retention, high dirt holding capacity and resistance to blockage with ease of regeneration, PEPLYN TF filters provide the optimum solution for trap filtration.

The carefully constructed polypropylene media ensures insoluble particulate is captured on the surface of the filtration media in a way that it can be easily removed through backwashing. This feature, combined with the strong, rigid construction provides reliable filtration performance over extended operational lifetimes.


Features

- Robust polypropylene construction designed for chemical CIP and backwash
- I High effective filtration area
- A range of absolute retention ratings


Benefits

- I Extended service life when combined with regular CIP regeneration
- I High beer flow and resistance to blockage under high loading
- I Defined cut-off to powders and flexibility to optimize the filtration

Performance Characteristics



Filtration Stage

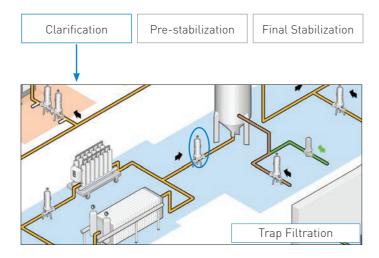

Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene Polypropylene ■ Downstream Support: I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel O-rings: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	e	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPLYN TF cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics


The retention characteristics of PEPLYN TF filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Micron Ra	ating at v	arious	efficien	cies		
Efficiency	>99.99%	99.98%	99.90%	99%	95%	90%
Beta Ratio	10000	5000	1000	100	20	10
Н	5.00	4.70	4.50	3.50	2.30	1.00
K	10.00	8.00	7.00	4.80	3.80	2.80
L	15.00	12.00	10.00	7.20	6.00	4.50

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

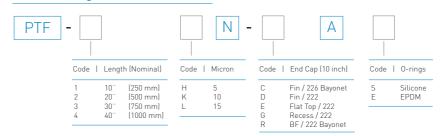










Parker domnick hunter commitments

Bottled Water collection

Multinational corporations and boutique producers of bottled water brands across the globe have partnered with Parker domnick hunter to successfully reach their quality and production requirements.

From plant to plant, every bottled water process is different depending upon; the category and branding of the finished bottled product, the local legislation of the intended market and the source of the water itself. These differences influence the performance expectations of the filtration systems and generate a wide degree of choice in approach to filtration. By understanding the specific requirements for each stage of the bottled water production process, Parker domnick hunter offer value added filtration solutions which deliver our commitments of; protecting water quality, reducing bottling costs and consumer and brand protection.

Parker domnick hunter provides tailored filtration solutions which meet the performance criteria required by a given process. Through a structured program of technical analysis available from a network of international support hubs, we work with end users to achieve their goals. Continued process optimization is our duty.

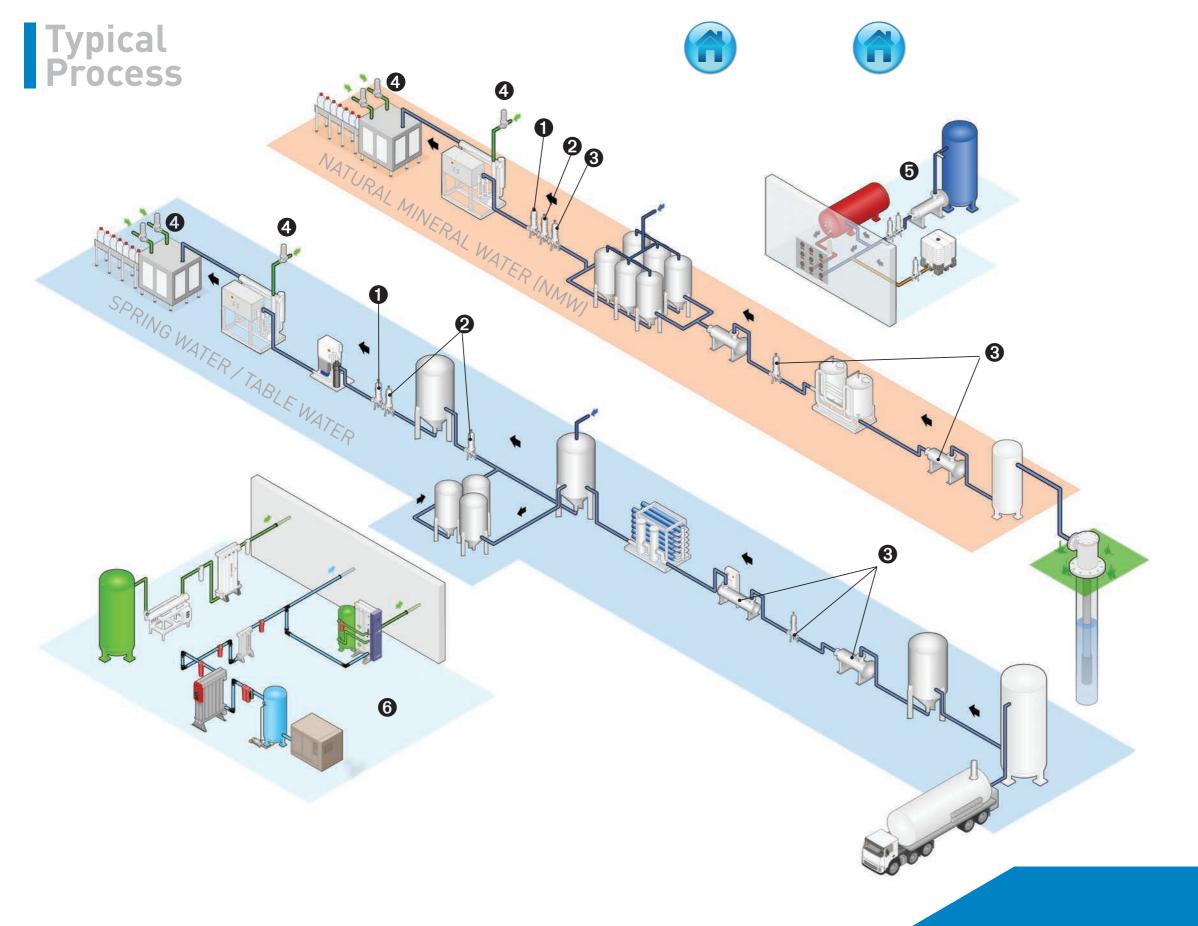

Specialized Water Applications

1 Final Stabilization

2 Pre-stabilization

3 Clarification

4 Sterilization of Gases

5 Water Utilities

6 Gas Utilities

Specific filtration requirements within the water bottling process dictate different design criteria for the filter systems. Parker domnick hunter have a range of specialized filtration systems designed to add value at each stage of the water bottling process.

BEVPOR MS Bottled Water

Filter Cartridges





BEVPOR MS filters provide full retention to industry regulated, water contaminating organisms to ensure the micro-biological safety of bottled water.

The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2µm grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MS filters provide assured performance throughout their service life.

BEVPOR MS filters have been designed to provide a costeffective solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated organisms
- I Inert materials of construction
- I Easily integrity tested in-situ


Benefits

- I Ensures the safety of the water prior to bottling
- $\blacksquare \ \, \text{Protects the purity and essential characteristics of the source water}$
- Assured filtration performance

Performance Characteristics



Filtration Stage

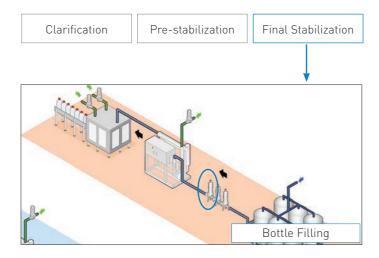





Specifications

Materials of Construction

I Filtration Membrane:

I Upstream Support: Polyester
I Downstream Support: Polyester
I Inner Support Core: Polypropylene
I Outer Protection Cage: Polypropylene
I End Caps: Nylon
I End Cap Insert: 316L Stainless Steel
I O-rings: Silicone / EPDM

Polyethersulphone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250mm) Up to 0.6m² (6.45ft²)

Cleaning and Sterilization

BEVPOR MS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 107cfu per cm² using Brevundimonas diminuta.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV who	en challen m of 10 ⁷ c	ged with a	a 2
		0.20	0.45	
Serratia marcesce Escherichia coli	ns	FR FR	FR FR	
Enterococcus faeca	3175	FR	FR	
Clostridium perfrir Pseudomonas aero Brevundimonas dii	uginosa	FR FR FR	FR FR 5	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to $>10^7$ per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Rating
Test Parameters	0.20	0.45
Test Pressure (barg) Test Pressure (psig) Max Diffusional Flow per 10" (ml /min)	2.4 35.0 16.0	1.7 25.0 16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

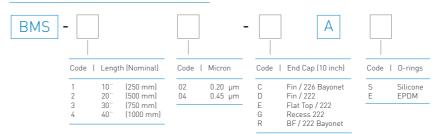

Filter Cartridges





BEVPOR MW filters provide full retention to industry regulated, water contaminating organisms to ensure the microbiological safety of bottled water.

The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2µm grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MW filters provide assured performance throughout their service life.

The incorporation of an integral prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in increased capacity and long service lifetimes. BEVPOR MW filters have been designed to provide a cost-effective solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated organisms
- I Inert materials of construction
- Easily integrity tested in-situ
- I Integral depth prefiltration layer


Benefits

- I Ensures the safety of the water prior to bottling
- I Protects the purity and essential characteristics of the source water
- Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

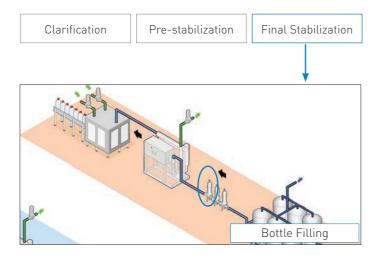

Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR MW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MW filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

	0.20	0.45	
ns	FR	FR	
Escherichia coli		FR	
Enterococcus faecalis		FR	
Clostridium perfringens		FR	
Pseudomonas aeruginosa		FR	
minuta	FR	5	
	minimu ns alis ngens uginosa	minimum of 107 c 0.20 ns FR FR alis FR ngens FR uginosa FR	ns FR

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micron Rating	
Test Parameters	0.20	0.45
Test Pressure (barg)	2.4	1.7
Test Pressure (psig)	35.0	25.0
Max Diffusional		
Flow per 10" (ml /min)	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

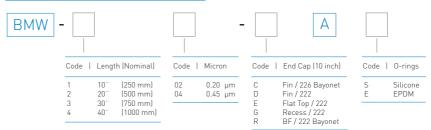



BEVPOR MH filters provide full retention to industry regulated, water contaminating organisms to ensure the microbiological safety of bottled water.

The inert and highly asymmetric PES membrane provides validated microbial retention to regulated, contaminating organisms. The 0.2µm grade provides complete sterility in accordance to ASTM F838-05 requirements. Combined with hydrophilic properties for easy integrity testing, BEVPOR MH filters provide assured performance throughout their service life. The incorporation of an active prefilter layer, combined with an increased filtration area provides high water flow rates, greater resistance to blockage and maximized service lifetimes.

BEVPOR MH filters have been designed to provide the optimum solution to the microbial sterilization and stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated organisms
- I Inert materials of construction
- Easily integrity tested in-situ
- Integral depth prefiltration layer
- I High filtration area


Benefits

- I Ensures the safety of the water prior to bottling
- I Protects the purity and essential characteristics of the source water
- Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

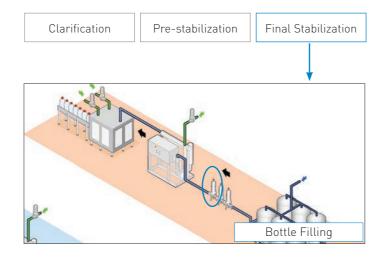

Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR MH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR MH filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per cm² using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV whe	n challen n of 10 ⁷ c	ged with fu per cm	a 2
		0.20	0.45	
Serratia marcesce	ens	FR	FR	
Escherichia coli		FR	FR	
Enterococcus faed	calis	FR	FR	
Clostridium perfri	ngens	FR	FR	
Pseudomonas aei	ruginosa	FR	FR	
Brevundimonas d	iminuta	FR	5	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micron Rating	
Test Parameters	0.20	0.45
Test Pressure (barg)	2.4	1.7
Test Pressure (psig)	35.0	25.0
Max Diffusional		
Flow per 10" (ml/min)	21.0	21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

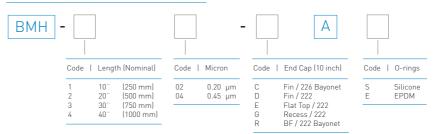

BEVPOR PS Bottled Water

Filter Cartridges





BEVPOR PS filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.

The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a costeffective solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated micro-organisms
- I Inert material of construction
- I Easily integrity tested in-situ


Benefits

- I Ensures the safety of the water prior to bottling
- $\blacksquare \ \, \text{Protects the purity and essential characteristics of the source water}$
- Assured filtration performance

Performance Characteristics



Filtration Stage

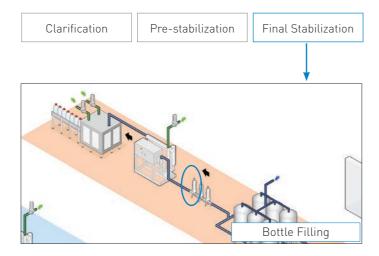





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone
I Upstream Support: Polyester
I Downstream Support: Polyester
I Inner Support Core: Polypropylene
I Outer Protection Cage: Polypropylene
I End Caps: Nylon

I End Cap Insert: 316L Stainless SteelI O-rings: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR PS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV whe	n challen n of 10 ⁷ c	ged with fu per cm	a 2
		0.20	0.45	
Serratia marcescei Escherichia coli Enterococcus faeca		FR FR FR	FR FR FR	
Clostridium perfrin Pseudomonas aeru Brevundimonas din	iginosa	FR FR 5	FR 9.1 -	
Dievanannonas un	iiiiuta	5		

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to $>10^7$ per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micro 0.20	n Rating 0.45
Test Pressure (barg) Test Pressure (psig) Max Diffusional	1.7 25.0	1.4 20.0
Flow per 10" (ml /min)	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

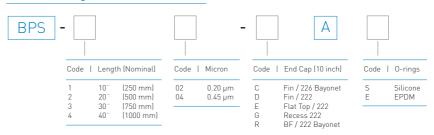

BEVPOR PW

Bottled Water



BEVPOR PW filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.

The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PW filters provide assured performance throughout their service life.

The incorporation of an integral prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in increased capacity and long service lifetime.

BEVPOR PW filters have been designed to provide a costeffective solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated micro-organisms
- I Inert materials of construction
- I Easily integrity tested in-situ
- I Integral depth prefiltration layer


Benefits

- I Ensures the safety of the water prior to bottling
- I Protects the purity and essential characteristics of the source water
- Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

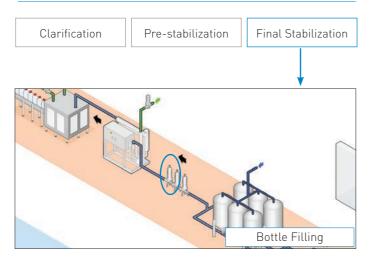

Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information

Retention Characteristics

0.2µm BEVPOR PW filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using Brevundimonas diminuta.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	rganism LRV who		ged with a fu per cm	3
		0.20	0.45	
Serratia marcesce	ns	FR	FR	
Escherichia coli		FR	FR	
Enterococcus faec	alis	FR	FR	
Clostridium perfringens		FR	FR	
Pseudomonas aeruginosa		FR	9.1	
Brevundimonas di	minuta	5	-	

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10⁷ per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micron Rating	
Test Parameters	0.20	0.45
Test Pressure (barg) Test Pressure (psig) Max Diffusional	1.7 25.0	1.4 20.0
Flow per 10" (ml /min)	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

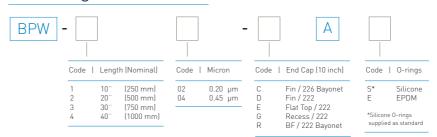

BEVPOR PH Bottled Water

Filter Cartridges





BEVPOR PH filters ensure the microbiological safety of bottled water whilst protecting the purity and essential characteristics of the source water.

The inert and highly asymmetric PES membrane provides validated microbial retention to industry regulated contaminating organisms. Combined with hydrophilic properties for easy integrity testing, BEVPOR PH filters provide assured performance throughout their service life.

The incorporation of an integral prefilter layer, combined with an increased filtration area, provides high water flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to the microbial stabilization of bottled water by providing increased process control with increased operational efficiency.


Features

- I Validated retention to industry regulated micro-organisms
- I Inert materials of construction
- Easily integrity tested in-situ
- I Integral depth prefiltration layer
- I High filtration area


Benefits

- I Ensures the safety of the water prior to bottling
- I Protects the purity and essential characteristics of the source water
- Assured filtration performance
- I Increased throughput to blockage
- I High water flow and maximized operational efficiency

Performance Characteristics



Filtration Stage

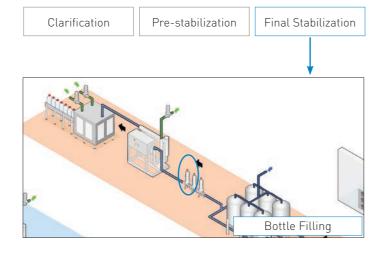





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone ■ Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester Inner Support Core: Polypropylene I Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

0.2µm BEVPOR PH filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 10⁷cfu per 10" cartridge using *Brevundimonas diminuta*.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when minimu		d with a fu per cm²
		0.20	0.45
Serratia marce Escherichia co Enterococcus I Clostridium pe Pseudomonas	li faecalis rfringens	FR FR FR FR	FR FR FR FR 9.1

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to $>10^7$ per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow Test Parameters	Micro 0.20	n Rating 0.45
Test Pressure (barg) Test Pressure (psig) Max Diffusional	1.7 25.0	1.4 20.0
Flow per 10" (ml /min)	21.0	21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

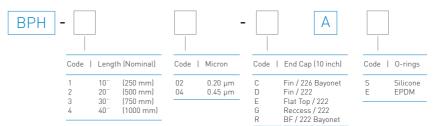







Features

- I Fully validated microbial reduction
- Truly optimized graded density using unique Optimized Depth Construction Technology
- Mechanically strong and chemically resistant polypropylene construction

optimization has led to the development of a new range of prefilters which offer superior levels of membrane filter protection and reduced running costs for bottling plants worldwide.

Parker domnick hunter's continued focus on process


Throughout the bottling process it is important to protect the water from external contamination. The PREPOR NG filter has been carefully designed and constructed to protect the purity and essential characteristics of the source water whilst reducing colloidal particulate and regulated micro-organisms over extended periods of use. This in turn reduces the potential for biofilm formation in downstream systems and significantly improves the operating lifetime of membrane final filters.

Increased resistance to frequent SIP / CIP cycles combined with the inherent strength and robust construction provides stable retention through the filter's lifetime.


Benefits

- I Reduced risk of microbial contamination during intermediate storage
- I Improved retention efficiency and dirt holding capacity
- I Stable, reliable retention efficiency throughout the service life

Performance Characteristics



Filtration Stage

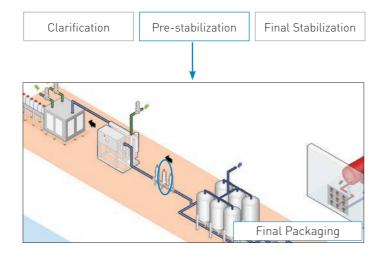





Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Fo	Max Forward dP		
°C	°F	(bar)	(psi)		
20	68	5.0	72.5		
40	104	4.0	58.0		
60	140	3.0	43.5		
80	176	2.0	29.0		
90	194	1.0	14.5		
>100 (steam)	>212 (steam)	0.3	4.0		

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics

The absolute retention characteristics of PREPOR NG filters have been validated by challenges performed with the following organisms.

Organism	LRV wl	hen chal	lenged w	vith a
	minim	um of 10) ⁷ cfu per	cm²
		А	В	D
Pseudomonas ae	ringens	3.0	2.8	0.5
Clostridium perfi		5.0	2.2	2.2
Serratia marceso		3.9	3.4	1.9


Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.




Optimized Depth Construction (ODC) provides a unique graded density combining longer service life with absolute filtration efficiency.

Performance Benefits



ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

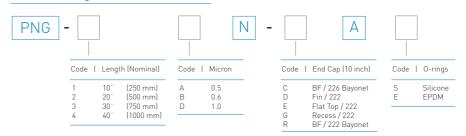





Parker domnick hunter commitments

Cider

Cider choice and consumption continue to grow and quality specifications are increasing to reflect consumer needs and the extended shelf-life required for products that travel further afield. Aside of live and cloudy ciders, the emphasis for the majority of volume produced is to provide consumers with a fresh tasting, visually brilliant product.

Key to achieving these requirements is the efficacy of filtration throughout the process. For products that are to be pasteurised filtration of the final product is primarily to provide visual clarity, although use of stabilizing grade filters also provides a dual barrier approach to microbiological quality. For cold stabilized products, whether in glass, PET or keg, the filter must provide a guarantee of protection against microbiological instability. Throughout the process, microfiltration plays a large role in assuring the quality of ancillary fluids such as carbon dioxide, steam and water.

Parker domnick hunter has partnered with cider makers and packagers to meet their changing needs over the years. Through a structured application-led approach, we can provide options for various levels of clarification and microbiological stability throughout the production process, whilst demonstrating proven cost reductions through operational efficiencies and filter design. Quality, economy and continuing process optimisation are our ongoing commitments.

BEVPOR PS Cider

Filter Cartridges







BEVPOR PS cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged. Combined with hydrophilic properties for easy integrity testing, BEVPOR PS filters provide assured performance throughout their service life.

BEVPOR PS filters have been designed to provide a costeffective solution to cider stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert material of construction
- Easily integrity tested in-situ


Benefits

- I Ensures effective microbial stabilization of cider
- I Preserves the organoleptic qualities of the cider
- Assured filtration performance

Performance Characteristics



Filtration Stage

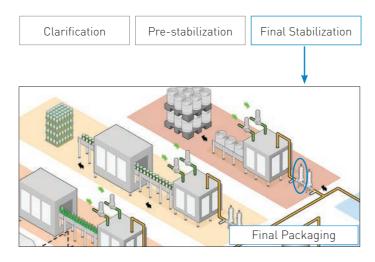





Specifications

Materials of Construction

I Filtration Membrane:

O-rings:

I Upstream Support: Polyester
I Downstream Support: Polyester
I Inner Support Core: Polypropylene
I Outer Protection Cage: Polypropylene
I End Caps: Nylon
I End Cap Insert: 316L Stainless Steel

Polyethersulphone

Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Fo	orward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PS filters have been validated by challenges performed with the following organisms.

LDV when challenged with a

	minimum of		
	0.45	0.65	1.2
		ED	
Saccharomyces cerev	isiae FR	FR	FR
Brettanomyces bruxe	<i>llensis</i> FR	FR	FR
Lactobacillus brevis	FR	FR	-
Acetobacter oeni	FR	FR	-
Pseudomonas aerugii	nosa 9.1	8.9	-
Serratia marcescens	FR	FR	-

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Ratin	ıg
Test Parameters	0.45	0.65	1.2
Test Pressure (barg)	1.4	1.0	0.6
Test Pressure (psig) Max Diffusional	20.0	15.0	9.0
Flow per 10" (ml /min)	16.0	16.0	16.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

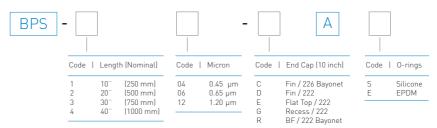

BEVPOR PW Cider

Filter Cartridges







BEVPOR PW cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.

The incorporation of an active prefilter layer allows graded retention throughout the depth of the filter to resist blockage, resulting in an increased capacity and long service lifetimes.

BEVPOR PW filters have been designed to provide a cost-effective solution to cider stabilization by providing increased process control with increased operational efficiency.


Features

- I Validated retention to spoilage organisms
- I Inert materials of construction
- I Easily integrity tested in-situ
- I Integral depth prefiltration layer


Benefits

- I Ensures effective microbial stabilization of cider
- I Preserves the organoleptic qualities of the cider
- Assured filtration performance
- I Increased throughput to blockage

Performance Characteristics



Filtration Stage

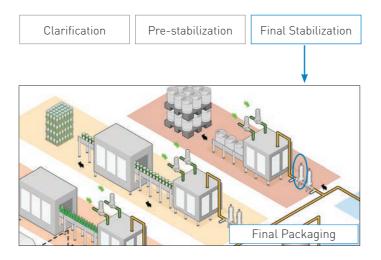





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.45 ft²)

Cleaning and Sterilization

BEVPOR PW cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PW filters have been validated by challenges performed with the following organisms.

Organism	LRV wh	nen cha um of 10	llenged v D ⁷ cfu pe	with a r cm²
		0.45	0.65	1.2
Saccharomyces cerev Brettanomyces bruxe Lactobacillus brevis Acetobacter oeni	ellensis	FR FR FR	FR FR FR FR	FR FR -
Pseudomonas aerugi Serratia marcescens	inosa	9.1 FR	8.9 FR	-

When expressed as titre reduction "FR" equates to >107 per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Mic	ron Rat	ing	
Test Parameters	0.45	0.65	1.2	
Test Pressure (barg)	1.4	1.0	0.6	
Test Pressure (psig) Max Diffusional	20.0	15.0	9.0	
Flow per 10" (ml/min)	16.0	16.0	16.0	

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

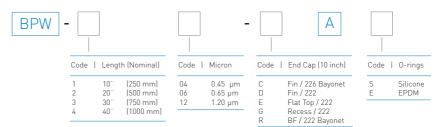

BEVPOR PH Cider

Filter Cartridges





BEVPOR PH cider filters protect the unique characteristics of cider by removing yeast and other spoilage organisms to ensure microbial stability during cold stabilization.

The inert and highly asymmetric PES membrane provides validated microbial retention to typical spoilage organisms, whilst protecting the cider's organoleptic qualities to preserve a fresh taste and a long shelf-life once packaged.


The incorporation of an active prefilter layer, combined with an increased filtration area provides high cider flow rates, greater resistance to blockage and maximized service lifetime.

BEVPOR PH filters have been designed to provide the optimum solution to cider stabilization by providing increased process control with maximized operational efficiency.

Features

- I Validated retention to spoilage organisms
- I Inert materials of construction
- Easily integrity tested in-situ
- I Integral depth prefiltration layer
- I High filtration area


Performance Characteristics



Benefits

- I Ensures effective microbial stabilization of cider
- I Preserves the organoleptic qualities of the cider
- I Assured filtration performance
- Increased throughput to blockage
- I High cider flow and maximized operational efficiency

Filtration Stage

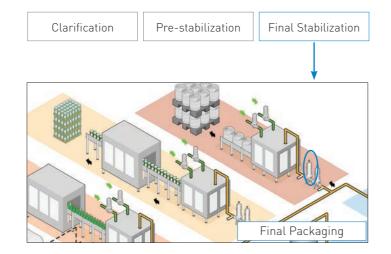





Specifications

Materials of Construction

I Filtration Membrane: Polyethersulphone ■ Prefilter Layer: Polyester Polyester I Upstream Support: Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

	Temperatur	·o	May Fo	rward dP
			i i din i	
	°C	°F	(bar)	(psi)
	20	68	5.0	72.5
	40	104	4.0	58.0
	60	140	3.0	43.5
	80	176	2.0	29.0
	90	194	1.0	14.5
>	100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

BEVPOR PH cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The retention characteristics of BEVPOR PH filters have been validated by challenges performed with the following organisms.

Organism	LRV whe	en challer m of 10 ⁷ o	onged with per control of the pe	th a
		0.45	0.65	1.
Saccharomyces cerev	visiae	FR	FR	F
Brettanomyces bruxe	llensis	FR	FR	F
Lactobacillus brevis		FR	FR	-
Acetobacter oeni		FR	FR	-
Pseudomonas aerugi	nosa	9.1	8.9	-
Serratia marcescens		FR	FR	-

*FR - Fully retentive during challenge

When expressed as titre reduction "FR" equates to >10" per 10" module.

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micro	n Ratin	g	
Test Parameters	0.45	0.65	1.2	
Test Pressure (barg)	1.4	1.0	0.6	
Test Pressure (psig) Max Diffusional	20.0	15.0	9.0	
Flow per 10" (ml/min)	21.0	21.0	16.0	

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

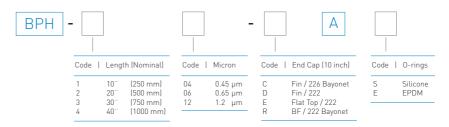











Parker domnick hunter's continued focus on process optimization and control has led to the development of a new range or prefilters for the clarification and pre-stabilization stages of cider production.

The control of particulate and microbial loading is important to provide stability to cider during storage and transport and to ensure that the finished product maintains its desirable characteristics after packaging.

Parker domnick hunter's next generation of PREPOR filters have been developed to remove yeast and reduce bacterial loading to improve short-term stability and to increase the service life of downstream membrane filters. The robust componentry allows for caustic and backwash regeneration, making the filter stage a reliable and cost-effective solution to intermediate stabilization.


Features

- I Fully validated yeast removal and bacterial reduction
- I Truly optimized graded density using unique Optimized Depth Construction Technology
- I Mechanically strong and chemically resistant polypropylene construction designed for chemical CIP and backwash


Benefits

- I Effective control of clarity and microbial stability
- I Increased filtration capacity
- I Increased service life when combined with regular CIP regeneration

Performance Characteristics



Filtration Stage

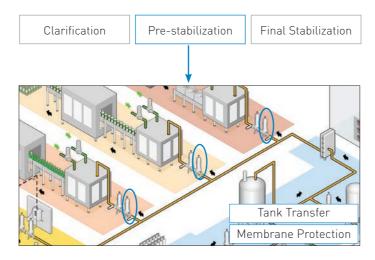



Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max For	ward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR NG cartridges can be repeatedly steam sterilized in-situ or autoclaved up to 135 °C (275 °F). They can be sanitized with hot water up to 90 °C (194 °F), are compatible with a wide range of chemicals and can be backwashed. Please refer to our Clean-in-Place Support Guide or contact your local Parker representative for more information.

Retention Characteristics

The absolute retention characteristics of PREPOR NG filters have been validated by challenges performed with the following organisms.

Urganism I	-Kv wne minimui	n challe m of 10 ⁷	ngea wi cfu per	tn a cm²
		Α	В	D
Saccharomyces cerevi	siae	FR	FR	FF
Brettanomyces bruxellensis		FR	FR	FF
Lactobacillus brevis		FR	FR	2.
Acetobacter oeni		2.0	2.0	1.
Serratia marcescens		3.9	3.4	1.9

*FR - Fully retentive during challenge


When expressed as titre reduction "FR" equates to >10" per 10" module.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.




Performance Benefits



ODC technology combines fine particle retention with increased strength and stability to enhance the performance offered by the PREPOR range.

Ordering information

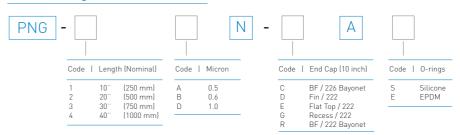



Filter Cartridges





CRYPTOCLEAR PES utilizes the unique properties of a microbially retentive polyethersulphone membrane that provides absolute retention of Cryptosporidium parvum oocysts to meet the specific needs of the food, beverage and potable water industries.

CRYPTOCLEAR PES membrane has an asymmetrical pore structure with a high voids volume which offers unrivalled retention capacity resulting in higher throughputs and higher flow rates than symmetrical membranes.

The microporous membrane is inherently hydrophilic and can be integrity tested repeatedly, providing a valuable quality assurance tool that fits well into a HACCP framework.


Features

- I Specifically designed and independently tested for the removal of Cryptosporidium parvum oocysts
- I Easily integrity tested in-situ
- I Strong, robust construction for repeated cleaning and sanitization in-situ


Benefits

- I Eliminates the threat of Cryptosporidium infection from the water supply
- Assured filtration performance
- I Extended service life from the membrane filter reduces the cost of filtration

Performance Characteristics



Filtration Stage

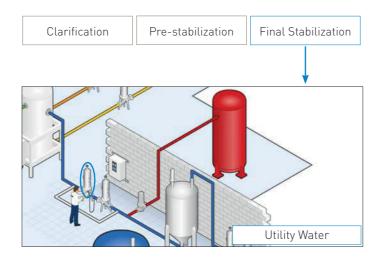

Specifications

Materials of Construction I Filtration Media:

Prefilter Layer:

■ Upstream Support: Polyester Downstream Support: Polyester I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: I End Cap Insert: 316L Stainless Steel

Polyethersulphone

Polyester

Standard o-rings: Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C. CRYPTOCLEAR PES is listed as a WRAS Approved Product. WRAS - Water Regulations Advisory Scheme BS6920 Test of Effect on Water Quality.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.8 m² (8.61 ft²)

Cleaning and Sterilization

CRYPTOCLEAR PES cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 142 °C (287.6 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals. Please refer to our Clean-in-Place support guide or contact your local Parker representative for more information.

Retention Characteristics

The removal efficiencies of CRYPTOCLEAR PES cartridges have been determined from tests conducted by Thames Water Utilities Limited on live Cryptosporidium oocysts.

Product	Micron	Retention
CRYPTOCLEAR PES	1.0	100%

Integrity Test Data


All filters are flushed with purified water prior to despatch. They are integrity testable to the following limits:

Micron Rating		1.0
Diffusional Flow Test Pressure Max. Diffusional Flow (ml / min)	(barg) (psig) (10")	0.6 9.0 21.0

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.


Ordering information

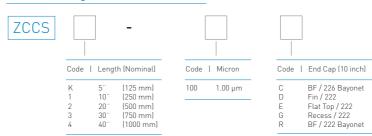

CRYPTOCLEAR PLUS Food and Beverage

Filter Cartridges



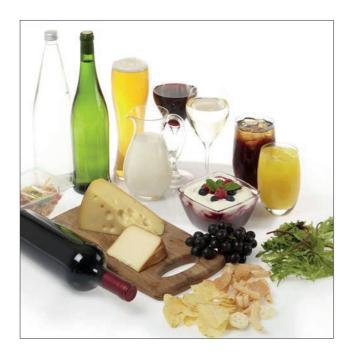

CRYPTOCLEAR PLUS pleated filter cartridges have been designed specifically for the removal of *Cryptosporidium* parvum and *Giardia intestinalis* from water in the food, beverage and healthcare industries.

Extensive research, including live oocyst challenge has resulted in a graded density filtration medium that maximizes loading capacity of the filters whilst accurately defining particle and oocyst retention under a variety of operating conditions.

CRYPTOCLEAR PLUS cartridges can be repeatedly sanitized using hot water, steam and a wide range of chemicals.


Features

- I Specifically designed for the reduction of *Cryptosporidium* parvum oocysts
- Graded density polypropylene pleated media, optimized for dirt holding capacity and oocyst retention
- 0.6 and 1.0 micron retention ratings


Benefits

- I Assured performance to reduce the threat of *Cryptosporidium* infection
- I Extended lifetime to blockage under high particle loading conditions
- I Flexibility to optimize the filtration in-line with the facility requirements for *Cryptosporidium* control

Performance Characteristics



Filtration Stage

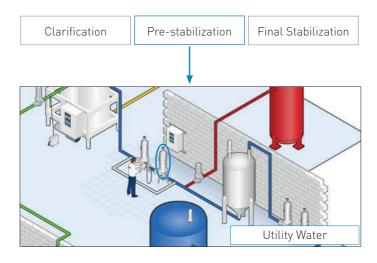

Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene Polypropylene ■ Downstream Support: I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Standard o-rings: Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C. CRYPTOCLEAR PLUS is listed as a WRAS Approved Product. WRAS - Water Regulations Advisory Scheme BS6920 Test of Effect on Water Quality.

Recommended Operating Conditions Up to 70 °C (158 °F) continuous operating temperature and higher short-term

temperature and higher short-term temperatures during CIP to the following limits:

re	Max Fo	rward dP
°F	(bar)	(psi)
68	5.0	72.5
104	4.0	58.0
140	3.0	43.5
176	2.0	29.0
194	1.0	14.5
>212 (steam)	0.3	4.0
	°F 68 104 140 176 194	°F (bar) 68 5.0 104 4.0 140 3.0 176 2.0 194 1.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.57 m² (6.13 ft²)

Cleaning and Sterilization

CRYPTOCLEAR PLUS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 142 °C (287.6 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics


The removal efficiencies of CRYPTOCLEAR PLUS cartridges have been determined from tests conducted by Thames Water Utilities Limited on live *Cryptosporidium oocysts*.

Product	Micron	Retention
CRYPTOCLEAR PLUS	0.6	>99.997%
CRYPTOCLEAR PLUS	1.0	>99.3%

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

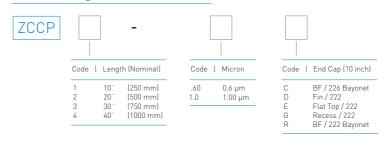

PREPOR PP Food and Beverage

Filter Cartridges





PREPOR PP filter cartridges will significantly reduce the number of yeast and spoilage organisms from beverage products, providing extremely cost-effective pre-stabilization of process liquids.

PREPOR PP filters will also "condition" liquids and can be used to improve the visual clarity and filterability of products, to benefit the performance and efficiency of terminal stabilization operations such as final membrane stabilization and pasteurization.

The filters have been designed to withstand harsh operating conditions. Their mechanical strength and wide chemical resistance make them suitable for aggressive clean-in-place operations using chemicals and steam.


Features

- I Validated retention to yeast and spoilage bacteria
- I High filtration area pleated media
- I Thermally bonded, all polypropylene construction


Benefits

- I Short-term microbial stability of process liquids
- $\blacksquare \ \ \mathsf{High} \ \mathsf{flow} \ \mathsf{and} \ \mathsf{service} \ \mathsf{life} \ \mathsf{to} \ \mathsf{blockage}$
- Compatible with aggressive process conditions including chemical cleaning and steam sterilization

Performance Characteristics



Filtration Stage

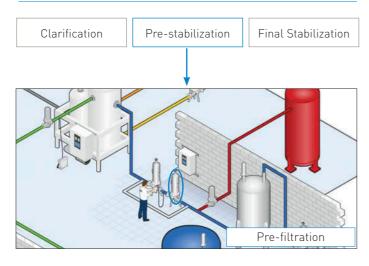

Specifications

Materials of Construction

I Filtration Media:

I Upstream Support:
Downstream Support:
Polypropylene
I Inner Support Core:
Outer Protection Cage:
Polypropylene
Polypropylene
Polypropylene
I End Caps:
Polypropylene
316L Stainless Steel
O-rings/gaskets:
Silicone / EPDM

Polypropylene

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperature		Max Forward dP	
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization

PREPOR PP cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics


The retention characteristics of PREPOR PP filters have been determined by a combination of controlled laboratory tests and in-use monitoring for a number of organisms.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²		
		В	D
Saccharomyces ce	revisiae	4	2
Escherichia coli		2	-
Oenococcus oenos		2	-
Serratia marcescei	ns	2	-

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

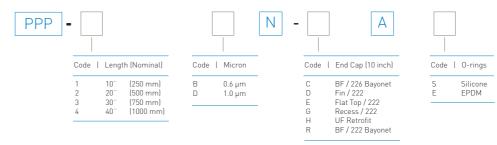

PEPLYN PLUS Food and Beverage

Filter Cartridges





PEPLYN PLUS filter cartridges are utilized for the clarification and pre-stabilization of process liquids and supporting utility solutions for the beverage industries.

Available in a range of absolute retention ratings, PEPLYN PLUS cartridges represent a cost-effective solution to condition a range of beverage products prior to intermediate storage or final

Extensive research has resulted in filter media with continuously graded fibre density giving progressively finer particulate retention through the depth of the media. This, combined with optimized media pleating density gives PEPLYN PLUS cartridges exceptional lifetime and retention performance characteristics.


Features

- Absolute retention ratings from 0.6μm to 100μm
- I Pleated media with graded density
- I All polypropylene, thermally bonded cartridge construction

Benefits


- I Reliable, fine particle retention
- I High flow and increased service life to blockage
- I Compatible with aggressive process conditions including chemical cleaning and steam sanitization

Performance Characteristics



Flow (L / min) for liquid @ 20 °C and 1 cp per 10" module

Filtration Stage

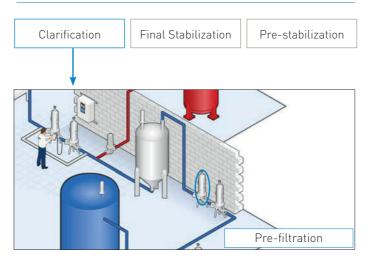

Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene Polypropylene ■ End Cap Insert (if applicable): 316L Stainless Steel*

* Not available in B End Cap variants

Standard o-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatu	re	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.0	14.5
>100 (steam)	>212 (steam)	0.3	4.0

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

PEPLYN PLUS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics

The retention characteristics of PEPLYN PLUS filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.


			. ,		
Micron rating at various efficiencies					ıes
Media	>99.99%	99.98%	99.90%	99%	90%
Code	10000	5000	1000	100	10
0.6	0.60	0.57	0.54	0.32	0.20
1.0	1.00	0.95	0.90	0.70	0.50
1.5	1.50	1.40	1.10	0.80	0.60
003	3.00	2.80	1.80	1.00	0.70
005	5.00	4.70	4.50	3.50	1.00
007	7.00	6.70	6.30	4.50	2.50
010	10.00	8.00	7.00	4.80	2.80
015	15.00	12.00	10.00	7.20	4.50
020	20.00	16.00	14.00	10.00	6.00
025	25.00	20.00	17.00	12.00	7.00

^{*} Higher microns available upon request

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

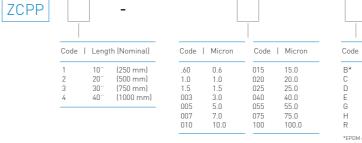

		-
ron	Code	End Cap (10 inch)
))))))	B* C D E G H	dh DOE BF / 226 Bayonet Fin / 222 Flat Top / 222 Recess / 222 UF Retrofit BF / 222 Bayonet
	*EPDM gaskets supplied as standard	





PEPLYN HD Food and Beverage

Filter Cartridges





PEPLYN HD filter cartridges have been developed to excel in liquid clarification applications where a consistent quality of filtrate is required from variable particle loadings of the process solution.

The PEPLYN HD filter media has outstanding particle holding capacity through its multi-layer high depth construction, providing extended service lifetimes and consistent quality filtrate under demanding conditions.

Capture of particles is throughout the depth of the media with larger particles being retained in the outer prefiltration layers, while the inner graded density media provides accurately defined retention to finer particulate. Both these mechanisms combine to provide a cartridge filter which returns extended service lifetimes.


Features

- I High depth, graded density filtration media
- I Available in a range of absolute micron retention ratings
- I All polypropylene, thermally bonded construction


Benefits

- I Increased dirt holding capacity and resistance to blockage under high loading conditions
- I Ability to provide consistent quality of filtrate in a wide range of clarification applications
- I Compatible with aggressive process conditions including chemical cleaning and steam sanitization

Performance Characteristics



Filtration Stage

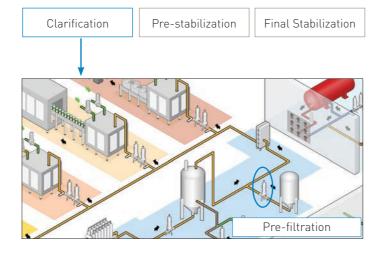





Specifications

Materials of Construction

I Filtration Media:

■ Prefilter Layer: Polypropylene Polypropylene I Upstream Support: Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions Up to 70 °C (158 °F) continuous operating

temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Forward dP		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.3 m² (3.22 ft²)

Cleaning and Sterilization

PEPLYN HD cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics


The retention characteristics of PEPLYN HD filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

90%
10
0.70
1.60
3.40
4.00
5.00
6.00
6.80

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

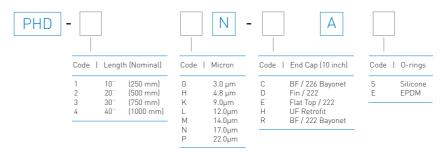

VSH & HSL AVAILABLE

PEPLYN HA Food and Beverage

Filter Cartridges





PEPLYN HA filters have been specifically developed to provide the optimum solution for particulate removal in liquid clarification applications.

The filtration media balances a high surface area and closely controlled porosity, in a configuration that maximizes the cleaning efficiency of the cartridge through backwash procedures.

Capture of larger insoluble particulate is predominantly on the surface of the media, where the rigid, open pleat structure ensures that backwash cleaning provides effective removal. Smaller colloids are retained throughout the depth of the graded density PEPLYN media, providing accurately defined retention under the variable particle loading conditions typical in clarification applications.


Features

- Specially designed media for backwash regeneration against insoluble particulate
- I High surface area
- I Available in a range of absolute micron retention ratings


Benefits

- I Increased service life when combined with frequent backwash cleans
- I High flow and increased resistance to blockage under high particle loading conditions
- A consistent and reliable quality filtrate delivered to intermediate storage in the bottling facility

Performance Characteristics



Filtration Stage

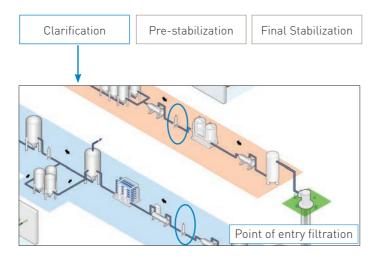





Specifications

Materials of Construction

I Filtration Media: Polypropylene
I Upstream Support: Polypropylene
I Downstream Support: Polypropylene
I Inner Support Core: Polypropylene
I Outer Protection Cage: Polypropylene
I End Caps: Polypropylene

I End Cap Insert: 316L Stainless SteelI O-rings: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Forward dP			
°C	°F	(bar)	(psi)		
20	68	5.0	72.5		
40	104	4.0	58.0		
60	140	3.0	43.5		
80	176	2.0	29.0		
90	194	1.0	14.5		
>100 (steam)	>212 (steam)	0.3	4.0		

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.7 m² (7.53 ft²)

Cleaning and Sterilization

PEPLYN HA cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 135 °C (275 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics


The retention characteristics of PEPLYN HA filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

Mic	ron ratin	g at vario	ous ett	icienc	ıes
>99.99%	99.98%	99.90%	99%	95%	90%
10000	5000	1000	100	20	10
1.00	0.95	0.90	0.70	0.60	0.50
1.50	1.40	1.10	0.80	0.70	0.60
3.00	2.80	1.80	1.00	0.90	0.70
5.00	4.70	4.50	3.50	2.30	1.00
10.00	8.00	7.00	4.80	3.80	2.80
15.00	12.00	10.00	7.20	6.00	4.50
20.00	16.00	14.00	10.00	8.00	6.00
25.00	20.00	17.00	12.00	9.00	7.00
32.00	27.00	24.00	18.00	13.00	10.00
50.00	40.00	34.00	28.00	20.00	17.00
70.00	55.00	50.00	40.00	30.00	25.00
125.00	100.00	80.00	70.00	50.00	40.00
	>99.99% 10000 1.00 1.50 3.00 5.00 10.00 15.00 20.00 25.00 32.00 50.00 70.00	>99.99% 99.98% 10000 5000 1.00 0.95 1.50 1.40 3.00 2.80 5.00 4.70 10.00 8.00 15.00 12.00 20.00 16.00 25.00 20.00 32.00 27.00 50.00 40.00 70.00 55.00	>99.99% 99.98% 99.90% 10000 5000 1000 1.00 0.95 0.90 1.50 1.40 1.10 3.00 2.80 1.80 5.00 4.70 4.50 10.00 8.00 7.00 15.00 12.00 10.00 20.00 16.00 14.00 25.00 20.00 17.00 32.00 27.00 24.00 50.00 40.00 34.00 70.00 55.00 50.00	>99.99% 99.98% 99.90% 99% 10000 5000 1000 100 1.00 0.95 0.90 0.70 1.50 1.40 1.10 0.80 3.00 2.80 1.80 1.00 5.00 4.70 4.50 3.50 15.00 12.00 10.00 7.20 20.00 16.00 14.00 10.00 25.00 20.00 17.00 12.00 32.00 27.00 24.00 18.00 50.00 40.00 34.00 28.00 70.00 55.00 50.00 40.00	10000 5000 1000 100 20 1.00 0.95 0.90 0.70 0.60 1.50 1.40 1.10 0.80 0.70 3.00 2.80 1.80 1.00 0.90 5.00 4.70 4.50 3.50 2.30 10.00 8.00 7.00 4.80 3.80 15.00 12.00 10.00 7.20 6.00 20.00 16.00 14.00 10.00 8.00 25.00 20.00 17.00 12.00 9.00 32.00 27.00 24.00 18.00 13.00 50.00 40.00 34.00 28.00 20.00 70.00 55.00 50.00 40.00 30.00

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number.
Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

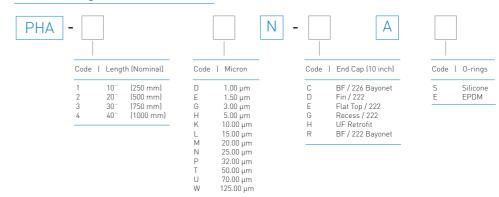

VSH & HSL HOUSING RANGE AVAILABLE



PROPLEAT PP filters have been developed to bridge the gap between meltblown depth filters and absolute rated pleated media filters for liquid clarification.

Their continuous length and all polypropylene construction results in a robust yet economical design that maximizes the effective filtration area and provides wide chemical compatibility, coupled with low extractable levels.

All PROPLEAT PP cartridges exhibit 99% efficiency at their given retention rating, providing consistent and economical clarification in a diverse range of applications.


Features

- A wide range of retention ratings
- I Continuous length thermally bonded polypropylene sleeve
- I Elevated temperature option available for hot water sanitization and steam sterilization


Benefits

- I Flexibility to excel in a wide range of clarification applicaitons
- I Strong, robust construction to provide stable retention in diverse process conditions
- I Ability to be cleaned and sterilized in-situ

Performance Characteristics



Filtration Stage

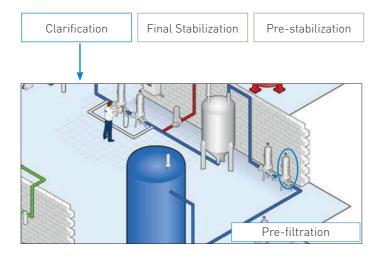



Food and Beverage

Specifications

Materials of Construction

- I Filtration Media: I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene Polypropylene
- End Cap Insert (if applicable): 316L Stainless Steel*
- * Not available in B and L End Cap variants
- I Standard o-rings / Gaskets: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temperatur	re	Max Forward dP		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

PROPLEAT PP cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 121 °C (250 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

Retention Characteristics

The retention characteristics of PROPLEAT PP filter cartridges have been determined by a single-pass technique using suspensions of ISO 12103 Pt. 1 A2 Fine and A4 Course test dust in water.

99	% approxim	ate ratings at low	ver efficiencies
Media	99%	95%	90%
Code ß Ratio	100	25	10
E	0.8	0.7	0.6
G	1.0	0.9	0.7
Н	3.5	2.3	1.0
K	4.8	3.8	2.8
L	7.2	6.0	4.5
М	10.0	8.0	6.0
N	12.0	9.0	7.0
P	18.0	13.0	10.0
U	40.0	30.0	25.0

Recommended Rinse Volume

Prior to use - 10 litres per 10" (250 mm) cartridge.

Minimum Box Quantities

All cartridges supplied in boxes of 6.


Dimensions

- Nominal outside diameter:
- 2.8" (70 mm) C,D,E,R Style
 - 2.5" (64 mm) B,L Style
- I Nominal inside diameter:
 - 1.1" (28 mm)

Standard Lengths (DOE seal to seal)

Length	B Style	L Style
1 2 3 4	9 ⁷ / ₈ " (250 mm) 19 ¹ / ₂ " (498 mm) 29 ³ / ₈ " (746 mm) 39 ¹ / ₈ " (994 mm)	9 ⁷ / ₈ " (250 mm) 20" (508 mm) 30 ¹ / ₈ " (766 mm) 40" (1014 mm)

Ordering information

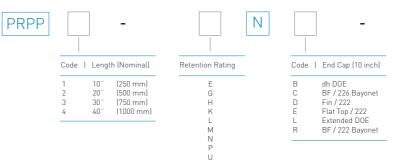



VSH & HSL

AVAILABLE

PARMAX Food and Beverage

Filter Cartridges





The best of pleated and large diameter technologies are combined in Parker domnick hunter's PARMAX high flow filter cartridges.

The unique layered construction provides excellent retention across a wide range of flux rates. One 6" diameter cartridge can handle up to 80 m3 / hr flow (60" length). The inside to outside flow allows for a high contaminant holding capacity and a long filter life which makes the PARMAX an ideal choice for a wide variety of critical process applications.

PARMAX cartridges are available in polypropylene in absolute (99.98%) micro ratings from 1 to 90 microns.


Features

- I Large diameter for high flow rates and ease of change-out
- Absolute retention ratings from 1 micron to 90 micron
- Inside out flow pattern ensures positive capture of contaminants


Benefits

- I Small filter system size and reduced running cost to represent an economical solution to a wide range of clarification duties
- Consistent quality filtrate is delivered in a wide range of clarification applications
- Increased protection to downstream systems and elimination of start-up cleans following change-out

Performance Characteristics



Filtration Stage

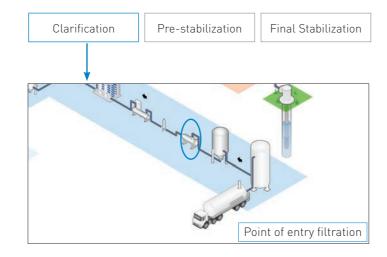





Specifications

Materials of Construction

| Filtration Media: Polypropylene | Support / Drainage: Polypropylene | Hardware: Polypropylene | Standard O-rings (SOE): EPDM

Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Maximum Operating Temperature 80 °C (176 °F) @ 2.1 bar (30 psi)

Recommended Flow Rate Conditions

20" : Up to 40 m³ / hr 40" : Up to 80 m³ / hr 60" : Up to 80 m³ / hr

Recommended Change Out Pressure 2.41 bar (32 psi)

Retention Ratings (99.98%) 1, 3, 4.5, 10, 20, 40 and 90** µm

.

Maximum Differential Pressure 4.8 bar (70 psi) @ 25 °C (77 °F) 2.1 bar (30 psi) @ 80 °C (176 °F)


Dimensions (Nominal)



Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

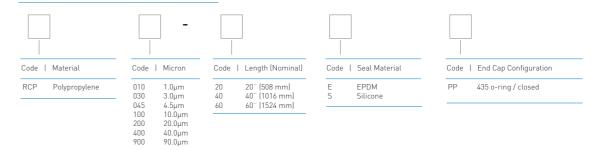

HSP HOUSING RANGE AVAILABLE

Food and Beverage

Filter Cartridges





Parker's MAXGUARD high capacity cartridge product line provides a cost-effective alternative to bag media or standard $2-\frac{1}{2}$ inch cartridges for high flow applications. Each MAXGUARD cartridge has a 6" (152 mm) nominal outside diameter and can handle flows up to 20m³/hr, significantly reducing the number of cartridges required for large flow applications.

MAXGUARD cartridges are available in polypropylene media. All cartridges feature an industry standard 226 positive o-ring seal and easy-to-grasp integrated handle. All cartridges have absolute retention ratings (beta = 5000) ideal for critical applications.


Features

- I Large diameter for high flow rates and ease of change-out
- Absolute rated, high depth, polypropylene media
- I Positive 226 o-ring seal for assured filtration integrity


Benefits

- I Small filter system size and reduced running cost to represent economical solution to a wide range of clarification duties
- I Consistent quality filtrate is delivered and increased resistance to blockage in a wide range of clarification applications
- I Assurance of filtration efficiency for more critical applications

Performance Characteristics



Filtration Stage

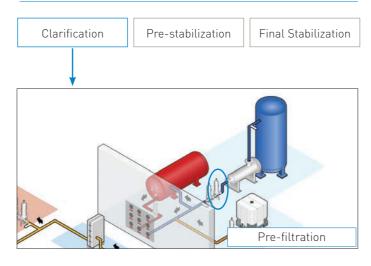

Specifications

Materials of Construction

I Filtration Media: Polypropylene Support Layers: Polypropylene Polypropylene Support Core: O-Rings: Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Maximum Operating Temperature

Max Temperature: 80°C at 2.1 bar 4.8 bar at 25°C Max Pressure: 2.1 bar at 80°C

Retention Ratings (99.98%)

99.98% specified micron rating

Flow Characteristics

MAXGUARD filters are capable of filtering 340 L / min per 40".

Recommended Change Out Pressure

2.41 bar (32 psi)

Dimensions (Nominal)

Cartridge Code		n Rating at 99.90%	Various E 99%	fficiencies 98%	95%
POLYPROP	YLENE				
MXGP005	0.5	0.4	0.2	>0.2	>0.1
MXGP020	2	1.4	0.4	0.2	>0.1
MXGP050	5	3.8	1.2	0.3	>0.1
MXGP100	10	7	3	0.9	>0.2
MXGP200	20	18	5	2	>0.2
MXGP400	40	23	18	8	>0.7

Ordering information



Retrofits 740 series HOUSING RANGI

BAG Filters Food and Beverage

Filter Cartridges





Parker domnick hunter's range of bag filters are manufactured from a variety of filter media each specifically chosen for its compatibility with a wide range of process liquids. Parker bag filters are of a fully welded design rather than sewn. No process liquid can bypass through needle holes caused by the sewing process or around a sewn ring. Parker domnick hunter's range of filter bags include:

Standard filter bags

Available in polypropylene, polyester and nylon from 1 to $1000\mu m$.





Specifications

Materials of Construction

I Filtration Media:

Polypropylene Felt Polyester Felt Nylon Mesh

Polypropylene

Ring:

Electro Plated Steel Stainless Steel Moulded Polypropylene

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.



Viscous Flow Correction Factors

Viscous Correction Factors													
Fluid Viscosity (cps)	10000	8000	6000	4000	2000	1500	1000	800	600	400	200	100	1
Flow rate (% water)	2.1	2.6	3.5	5	8	11	16	17	25	35	58	58	100


Compatibility

Material	Max Temperature	Organic Solvents	Oils and Fats	Alkalies	Organic Acids	Mineral Acids	Oxidising Agents	Resistance micro-organisms
Polypropylene	95°C (203°F)	Good	V. Good	Good	V. Good	Good	Fair	Fair
Polyester	150°C (302°F)	V. Good	V. Good	Good	Good	Good	Good	Good


Bag size	Diameter	Length	Surface Area	Volume	Max Flow Rate
1	7" (180 mm)	17" (435 mm)	0.25 m²	11.0 ltr	20 m³/hr
2	7" (180 mm)	32" (810 mm)	0.5 m ²	20.5 ltr	40 m³/hr
1 (mini)	4" (104 mm)	9" (230 mm)	0.07 m ²	1.9 ltr	6 m³/hr
2 (mini)	4" [180 mm]	15" (380 mm)	0.12 m ²	3.2 ltr	10 m³/hr

Flow rate is dependant upon media type, micron rating and the fluid being filtered


Performance Characteristics



Filtration Stage

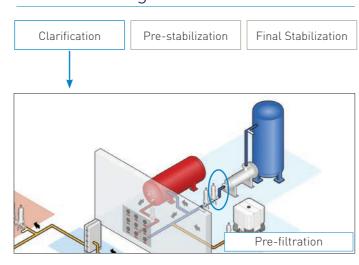

Ordering information

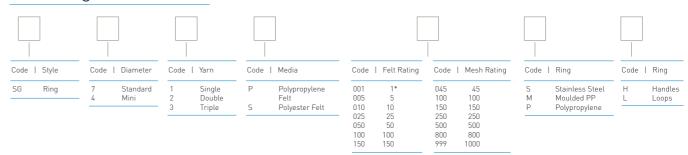

Filter Cartridges









Minimizing the cost of microbiological control while maintaining quality and product protection is a key requirement for utility water treatment within beverage production.

BEVPOR WG is an advanced membrane filter cartridge designed for the beverage industry to meet and surpass these criteria. Specifically developed as a beverage grade cartridge, BEVPOR WG utilizes an advanced polyethersulphone membrane configured to provide high flow and cost-effective performance. The membrane has an asymmetric pore structure which provides graded filtration throughout its depth, resulting in increased capacity to hold contaminants. Componentry has been selected to maximize mechanical strength and chemical compatibility enabling the filter to withstand repeated chemical cleaning and sterilization.


Features

- I Sterilizing grade PES membrane
- I Highly asymmetrical pore structure
- I Robust materials of construction can be repeatedly steam sterilized and hot water sanitized


Benefits

- I Ensures safety of process water
- I High flow and cost-effective performance
- Extended service life

Performance Characteristics



Filtration Stage

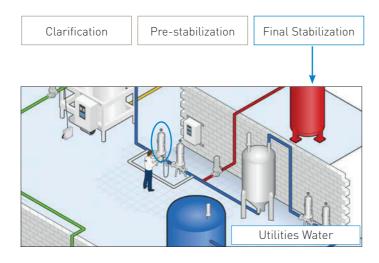



Specifications

Materials of Construction

I Filtration Media: Polyethersulphone I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: Polypropylene Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: 316L Stainless Steel O-rings: Silicone / EPDM

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following

Temperatur	re	Max Forward dP		
°C	°F	(bar)	(psi)	
20	68	5.0	72.5	
40	104	4.0	58.0	
60	140	3.0	43.5	
80	176	2.0	29.0	
90	194	1.0	14.5	
>100 (steam)	>212 (steam)	0.3	4.0	

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.5 m² (5.38 ft²)

Cleaning and Sterilization


BEVPOR WG cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130°C (266°F). They can be sanitized with hot water at up to 90°C (194°F) and are compatible with a wide range of chemicals.

Please refer to our Clean in Place support guide or contact your local Parker representative for more information.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

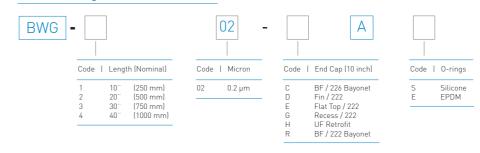

VSH & HSL AVAILABLE

BEVPOR MS Utilities

Filter Cartridges





Minimizing the cost of microbiological control while maintaining quality and product protection is a key requirement for utility water treatment within beverage production. BEVPOR MS is an advanced membrane filter cartridge designed for the beverage industry to meet and surpass these criteria.

Specifically developed as a beverage grade cartridge, BEVPOR MS utilizes an advanced polyethersulphone membrane configured to provide high flow and cost-effective performance. The membrane has an asymmetric pore structure which provides graded filtration throughout its depth, resulting in increased capacity to hold contaminants. Componentry has been selected to maximize mechanical strength and chemical compatibility enabling the filter to withstand repeated chemical cleaning and sterilization.


Features

- I Sterilizing grade PES membrane
- I Highly asymmetrical pore structure
- I Robust materials of construction can be repeatedly steam sterilized and hot water sanitized
- I Easily integrity tested in-situ


Benefits

- I Ensures safety of process water
- I High flow and cost-effective performance
- Extended service life
- Assured filtration performance

Performance Characteristics



Filtration Stage

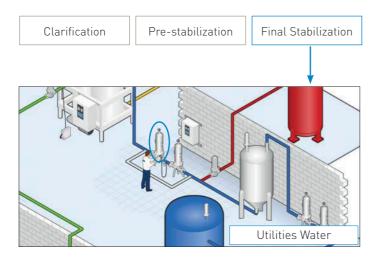





Specifications

Materials of Construction

I Filtration Media: Polyethersulphone I Upstream Support: Polyester Polyester ■ Downstream Support: I Inner Support Core:

Polypropylene Outer Protection Cage: Polypropylene I End Caps:

I End Cap Insert: 316L Stainless Steel Silicone / EPDM O-rings:

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Recommended Operating Conditions

Up to 70 °C (158 °F) continuous operating temperature and higher short-term temperatures during CIP to the following

Temperatur	re	Max Forward dP				
°C	°F	(bar)	(psi)			
20	68	5.0	72.5			
40	104	4.0	58.0			
60	140	3.0	43.5			
80	176	2.0	29.0			
90	194	1.0	14.5			
100 (steam)	>212 (steam)	0.3	4.0			

Effective Filtration Area (EFA) 10" (250 mm) Up to 0.6 m² (6.5 ft²)

Cleaning and Sterilization

BEVPOR MS cartridges can be repeatedly steam sterilized in-situ or autoclaved at up to 130 °C (266 °F). They can be sanitized with hot water at up to 90 °C (194 °F) and are compatible with a wide range of chemicals.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Retention Characteristics

0.2µm BEVPOR MS filters have been validated to provide sterile effluent after bacterial challenge testing following ASTM F838-05 methodology on 10" cartridges with more than 107 cfu per cm2 using Brevundimonas diminuta.

In addition, challenges with the following EU regulated organisms have been performed.

Organism	LRV when challenged with a minimum of 10 ⁷ cfu per cm ²
	0.20
Serratia marcescens	FR
Escherichia coli	FR
Enterococcus faecali	s FR
Clostridium perfringe	ens FR
Pseudomonas aerugi	inosa FR

Integrity Test Data


All filters are flushed with pharmaceutical grade purified water prior to despatch. They are integrity tested to the following limits:

Diffusional Flow	Micron Rating	
Test Parameters	0.20	
Test Pressure (barg)	2.4	
Test Pressure (psig)	35.0	
Max Diffusional Flow		
Per 10" (ml / min)	16.0	

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

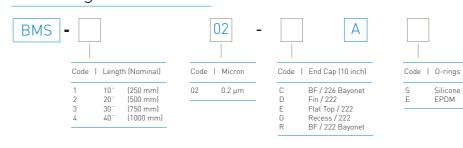

VSH & HSL AVAILABLE

SPUNFLOW QNUtilities

Filter Cartridges





Graded density, high porosity, SPUNFLOW QN filter elements are manufactured from thermally bonded Polypropylene microfibers. Offering high throughputs, low pressure loss, high holding dirt capacity and long on-stream life, the bonded fibre construction minimizes any possibility of fibre migration and is rugged enough to resist particle shedding, even under pulse conditions.

Consisting only of pure polymer, SPUNFLOW QN is compatible with most chemical processes and contain no additives, leachables or extractables and is compliant with the requirements of the FDA for food and beverage contact. Elements can be incinerated to trace ash reducing disposal costs.


Features

- I Thermally bonded polypropylene
- 90% nominal rated
- I High throughput and low pressure loss


Benefits

- Ability to provide defined clarification under a wide particle loading of the feed solution
- I Strong construction for stable retention
- Decreased system size and lower running costs provide an economical solution to clarification applications

Performance Characteristics



Filtration Stage

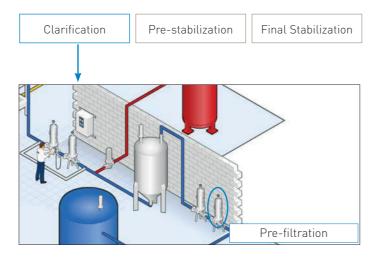





Specifications

Materials of Construction

l Filtration Membrane: Polypropylene Polyester / Nylon l End Caps: Polypropylene

Standard o-rings: Silicone

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.

Recommended Operating Conditions Maximum Temperature:

Polypropylene - 65°C (149°F)

Maximum Differential Pressure 4 bar at 20°C (68°F)

Maximum Recommended Differential Pressure 2 bar (29 psid)

Dimensions


Standard Cartridge

Outside diameter: 62 mm (2.44") Inside diameter: 29 mm (1.14")

End Capped Cartridge

Outside diameter: 64 mm (2.51")
Inside diameter: 27 mm (1.06")

Ordering information

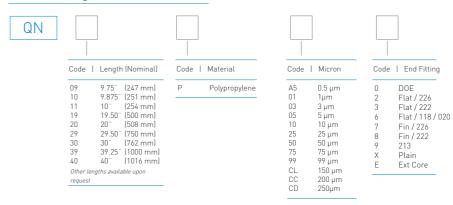

Minimum Box Quantity

10" 40

20" 20

30" 20

40" 20

EPDM



SPUNFLOW QA Utilities

Filter Cartridges





SPUNFLOW QA cartridges are a range of absolute graded density filter elements, manufactured from thermally bonded polypropylene microfibers layered onto a resilient centre core. The construction consists of numerous, distinctive filter zones with coarser outer layers acting as prefilters for the tighter, absolute rated central zone. This profile produces an element possessing high voids volume, for flow rates high flow rates, low pressure loss, high dirt holding capacity and long life.

The thermally bonded media also eliminates fibre migration and resists the tendency to unload during service.


Features

- Absolute ratings from 0.5 to 120 micron
- I Thermally bonded polypropylene
- I High throughput and low pressure loss


Benefits

- Ability to provide defined clarification under a wide particle loading of the feed solution
- I Strong construction for stable retention
- Decreased system size and lower running costs provide an economical solution to clarification applications

Performance Characteristics



Filtration Stage

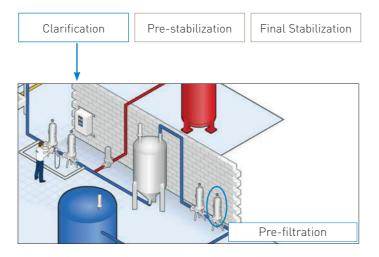





Specifications

Materials of Construction

I Filtration Membrane: Polypropylene
I End Caps: Polypropylene
Nylon
I Standard o-rings: Silicone

Food Contact Compliance Materials conform to the relev

Materials conform to the relevant requirements of FDA 21 CFR Part 177 and current EC1935 / 2004.

Recommended Operating Conditions Maximum Temperature: Polypropylene - 65°C [149°F]

Maximum Differential Pressure 4 bar at 20°C (68°F)


Maximum Recommended Differential Pressure 2 bar (29 psid) Dimensions

Standard Cartridge

Outside diameter: 64 mm (2.52") Inside diameter: 29 mm (1.14")

A caged version can be supplied in polypropylene 68mm (2.68")

Ordering information



Code Micron	Code End Fitting	Code Seal Material	Code Cage Option	Minimum Box Q
A5 0.5 μm A7 0.7 μm 01 1 μm 03 3 μm 05 5 μm 07 7 μm 10 10 μm 15 15 μm 20 20 μm 40 40 μm 50 50 μm 70 μm 90 90 μm	0 DOE 2 Flat / 226 3 Flat / 222 6 Flat / 118 / 020 7 Fin / 226 8 Fin / 222 9 213 X Plain E Ext Core	E EPDM S Silicone	S Standard L Light Cage	10" 40 20" 20 30" 20 40" 20







CARBOFLOW MX cartridges are offered in both high efficiency and general grades. They consist of bituminous coal sourced carbon, extruded together with an FDA listed thermoplastic binder, to produce an extremely porous yet rigid structure.

The result is a filter offering unsurpassed adsorptive capacity, up to 20 times that of traditional granular carbon or carbon impregnated filters, and high particle removal efficiency.

The rigid structure of CARBOFLOW MX not only minimizes any possibility of channeling, bypass or fluidizing, but also the release of carbon fines during start-up and operation. Such problems are common with more traditional carbon filters. CARBOFLOW MX is available in lengths up to 40" (1016 mm) together with end fittings to suit most industry standard housings.


Features

- I Solid piece, extruded construction
- I High surface area


Benefits

- I No flow channeling associated with other forms of carbon filter. This aspect provides a consistent level of adsorption and particle retention throughout the filter's lifetime
- I Small system sizes per application reduce the cost of filtration and return an economical solution

Performance Characteristics



Filtration Stage

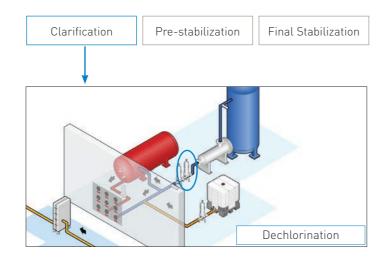



CARBOFLOW MX

Specifications

Materials of Construction

Carbon: Carbon Type: Steam activated Acid wash

Carbon Weight (per 10"): 350g I End Caps: Polypropylene

Food Contact Compliance

Materials conform to the relevant requirements of FDA 21 CFR Part 177, current EC1935 / 2004 and current USP Plastics Class VI - 121 °C.

Maximum Operating Temperature 60°C (158°F)

Maximum Differential Pressure 7 bar (101.52 psi)

Recommended Change Out Pressure

Retention Characteristics


	High Efficiency	General
Particle Removal	99.9% @ 2 mic	98% @ 10 mic
Chlorine Reduction**	76 cu.m @ 4 l / min	22.7 cu.m @ 4 l / mir
Chloroform Reduction*	3 cu.m @ 2 l / min	n / a


Per 10" element, for longer lengths multiply pro-rata for details of test conditions contact Parker domnick hunter for details.
Based on an inlet concentration of 2 ppm chlorine.

Applications

- Pre and post R.O. filtration
- De-chlorination
- Process water
- I Product rinse waters
- De-colourization

Ordering information











Fin / 226 Fin / 222

213 S0E



HIL MULTI HOUSING RANGE AVAILABLE **Utilities**

Steam Filters



Steam filtration is often neglected or regarded as an add on to liquid or gas filtration applications.

M•F LTER


It is however, a specific application and should be treated with the same level of importance as air, gas and liquid systems if longer filter lifetimes and overall system cost-effectiveness are to be achieved.

The quality of steam used within food and dairy industries has been raised higher on the agenda in an ever increasing number of companies. Minimum acceptable standards are now being quoted on a more regular basis with particular reference to 'culinary grade' steam. Steam serves several purposes in the food and beverage industry. It is critical that this steam is of a high quality to ensure effective and continuous operation of the

Features

- Robust all welded 316L stainless steel construction
- I 'JUMBO' filter configuration ensures maximum utilization of pipework capacity
- I Available in culinary grade 1 micron absolute


Filtration Stage



Benefits

- I Long service life under extreme conditions
- I Reduced operational cost
- I Assures performance to 3A standard

Which filter for which application?

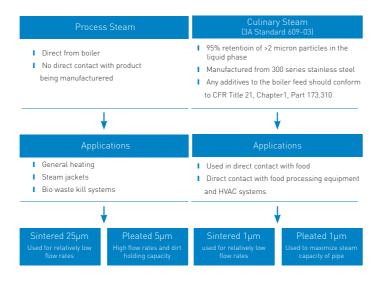



Steam Filters

Specifications - Pleated

Materials of Construction

Filtration Media: 316L Stainless Steel I Inner Support Core: 316L Stainless Steel Outer Protection Cage: 316L Stainless Steel I End Caps: 316L Stainless Steel

Standard o-rings/gaskets: EPDM (Standard)

Silicone and Viton (options available)

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 2 barg (29.00 psig).

The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F). Note: Temperature dependant on o-ring compound

Effective Filtration Area (EFA)

10" (250 mm) 0.15 m² (1.61 ft²)

Housing Materials of Construction I Material: 316L Stainless Steel

Surface Finish

Electropolished Ra 0.8 Single Internal: Mechanical Polish Single External: (Commercial Bright)

Jumbo Internal: Upstream - Beadblast Outlet Assembly -

Linished 180 grit

1/4" BSPP

Jumbo External: Beadblast

Vent / Drain Single / Jumbo:

Female Thread Seal Material: EPDM Aseptic Seal

Housing Design Pressure and

Temperature

16 barg (232 psig) Single: @ 200 °C (392 °F)

7 barg (101 psig) Jumbo:

@ 170°C (338°F)


1 📇	2	Figure	Housing Code	Connection Size	Capacity Kg / hr @ 1 barg	Overall Height	Replacement Filter Code
				15: (22.1	<100 mbar or 40 m / sec	(27)	
	هم مم	1 1	HBAHP01KY HBAHP011C	1.5" (38.1 mm) 2" (50.8 mm)	150 280	14.8" (376 mm) 20.7" (526 mm)	ZCHS-KC ZCHS-1C
		2 2 2 2	VISCE-01J-D VISCE-01J-E VISCE-03J-G VISCE-03J-H	3" (50.8 mm) 4" (101.6 mm) 6" (152.4 mm) 8" (203.2 mm)	750 1300 2300 3750	30.0" (763 mm) 35.2" (895 mm) 41.2" (1049 mm) 48.7" (1237 mm)	ZCHS-J3 ZCHS-J4 3 x ZCHS-J3 3 x ZCHS-J4
8	B				3730		


Correction Factors

To use the table above, the steam flow rates must be at 1 barg (14.50 psig). For system flows at different line pressures, divide the system flow by the correction factor to find the equivalent flow @ 1 barg (14.50 psig).

	Steam Pressure	0	1	2	3	4	5	6	7	8	9	10	
e d	Correction Factor	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	

Table showing the relative system size difference between pleated cartridges left and sintered cartridges right.





DS_FBG_19_01/14 Rev. 1B

-44 (0)191 4105121

Steam Filters Utilities

Filter Cartridges

M•F LTER

Specifications - Sintered

Materials of Construction

Filtration Media: Sintered Stainless Steel (316L)

I End Caps: 316L Stainless Steel ■ Standard o-rings/gaskets: EPDM (Standard)

Silicone and Viton® (options available)

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 5 barg (72.51 psig).

The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F). Note: Temperature dependant on o-ring compound

Housing Materials of Construction

■ Material: 316L Stainless Steel

Surface Finish Internal:

External:

Electropolished Ra 0.8 Mechanical Polish (Commercial Bright)

1/4" BSPP Vent / Drain:

Female Thread (Supplied with Plug)

EPDM Aseptic Seal Seal Material:

. 16 barg (232 psig) @ 200°C (392°F)

Housing Design Pressure and Temperature

Housing Code	Connection Size	Capacity I	Kg / hr @ 1 barg	Overall Height	Replacement Filter Code		
		<100 mba 1 µm	r or 40 m / sec 25 μm				
HBAHP01KY HBAHP011C HBAHP012C	1.5" [38.1 mm] 2" [50.8 mm] 2" [50.8 mm]	21 40 82	45 160 280	14.8" (376 mm) 20.7" (526 mm) 30.5" (776 mm)	ZCSSKC ZCSS1C ZCSS2C		

Note: For efficient steam distribution it is recommended that steam velocities are restricted to 25 m / sec-1. For more information on the HBA range, please contact Parker domnick hunter.

Correction Factors

To use the table above, the steam flow rates must be at 1 barg (14.50 psig). For system flows at different line pressures, divide the system flow by the correction factor to find the equivalent flow @ 1 barg (14.50 psig).

Steam Pressure	0	1	2	3	4	5	6	7	8	9	10
Correction Factor	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5

Ordering information



SINTERED Stainless Steel Retrofit Cartridge Part Numbers - 1.0 μ m & 25 μ m

Parker domnick hunter Cartridge	DS-R 3/1	DS-R 3/1.4	DS-R 4/1.5	DS-R 4/2.5	DS-R 5/2.5	DS-R 5/3	DS-R 10/3	DS-R 15/3	DS-R 20/3	DS-R 30/3	DS-R 30/5				
Retrofit Cartridge	GS3/1 SS3/1	GS3/1.5 SS3/1.5	GS4/1.5 SS4/1.5	GS4/2.5 SS4/2.5	GS5/2.5 SS5/2.5	GS5/3 SS5/3	GS10/3 SS10/3	GS15/3 SS15/3	GS20/3 SS20/3	GS30/3 SS30/3	GS30/5 SS30/5				
Parker domnick hunter Cartridge	DS-R 02/05 GS02/05	DS-R 02/10 GS02/10	DS-R 03/05 GS03/05	DS-R 03/10 GS03/10	DS-R 04/10 GS04/10	DS-R 04/20 GS04/20	DS-R 05/20 GS05/20	DS-R 05/25 GS05/25	DS-R 07/25 GS07/25	DS-R 07/30 GS07/30	DS-R 10/30 GS10/30	DS-R 15/30 GS15/30	DS-R 20/30 GS20/30	DS-R 30/30 GS30/30	DS-R 30/50 GS30/50
Retrofit Cartridge	SS02/05	SS02/10	SS03/05	SS03/10	SS04/10	SS04/20	SS05/20	SS05/25	SS07/25	SS07/30	SS10/30	SS15/30	SS20/30	SS30/30	SS30/50
Parker domnick hunter Cartridge	PDS-R 02/05	PDS-R 02/10	PDS-R 03/05	PDS-R 03/10	PDS-R 04/10	PDS-R 04/20	PDS-R 05/20	PDS-R 05/25	PDS-R 07/25	PDS-R 07/30	PDS-R 10/30	PDS-R 15/30	PDS-R 20/30	PDS-R 30/30	PDS-R 30/50
Retrofit Cartridge	P-GS02/05 P-SS02/05	P-GS02/10 P-SS02/10	P-GS03/05 P-SS03/05	P-GS03/10 P-SS03/10	P-GS04/10 P-SS04/10	P-GS04/20 P-SS04/20	P-GS05/20 P-SS05/20	P-GS05/25 P-SS05/25	P-GS07/25 P-SS07/25	P-GS07/30 P-SS07/30	P-GS10/30 P-SS10/30	P-GS15/30 P-SS15/30	P-GS20/30 P-SS20/30	P-GS30/30 P-SS30/30	P-GS30/50 P-SS30/50





Specifications - Sintered retrofit cartridges

Materials of Construction

Filtration Media: Sintered Stainless Steel (316L) 316L Stainless Steel I End Caps:

Standard o-rings/gaskets: EPDM (Standard)

Silicone and Viton® fontions available)

Recommended Operating Conditions


The maximum differential pressure in direction of flow (outside to in) is 10 barg (145.03 psig).

The maximum differential pressure in direction of flow (in to outside) is 5 barg (72.51 psig).


The maximum recommended continuous operating temperature range is -75 °C (-103 °F) to +200 °C (392 °F). Note: Temperature dependant on o-ring compound


Ordering Information

SINTERED retrofit cartridges

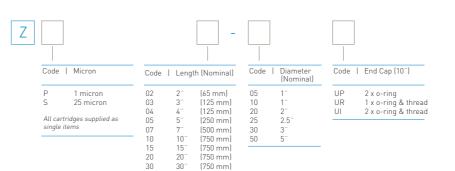







Description			Diagram	Description			Diagram	Description	L	D	Diagram
ZP/ZS 0310 UR	88	40	≪ ø D >	ZP/ZS 0210 UP	-		,	ZP/ZS 0205 UI	75	35	≪
ZP/ZS 0315 UR	88	40	← G →	ZP/ZS 0310 UP	86	35		ZP/ZS 0210 UI	93	35	← G →
ZP/ZS 0415 UR	124	40	A	ZP/ZS 0305 UP	-	-		ZP/ZS 0305 UI	89	35	
ZP/ZS 0425 UR	125	54		ZP/ZS 0410 UP	114	35		ZP/ZS 0310 UI	93	35	
ZP/ZS 0525 UR	152	54		ZP/ZS 0420 UP	117	40	, i	ZP/ZS 0410 UI	121	35	
ZP/ZS 0530 UR	148	76	7	ZP/ZS 0520 UP	141	40		ZP/ZS 0420 UI	127	40	-
ZP/ZS 1030 UR	269	76	Ĺ	ZP/ZS 0525 UP	141	54] [*] L	ZP/ZS 0520 UI	151	40	
ZP/ZS 1530 UR	405	76		ZP/ZS 0725 UP	193	54	1	ZP/ZS 0525 UI	151	54	
ZP/ZS 2030 UR	532	76		ZP/ZS 0730 UP	196	76	1	ZP/ZS 0725 UI	203	54	
ZP/ZS 3030 UR	784	76		ZP/ZS 1030 UP	269	76		ZP/ZS 0730 UI	206	76	
ZP/ZS 3050 UR	774	130	¥	ZP/ZS 1530 UP	396	76	*	ZP/ZS 1030 UI	279	76	*
				ZP/ZS 2030 UP	523	76		ZP/ZS 1530 UI	406	76	
				ZP/ZS 3030 UP	775	76		ZP/ZS 2030 UI	533	76	
				ZP/ZS 3050 UP	775	76		ZP/ZS 3030 UI	785	76	
								ZP/ZS 3050 UI	785	130	

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C.





Parker domnick hunter commitments

Air & Gas collection

The treatment of gases in food and beverage production and packaging processes is of critical importance to protect the food from hazards which could otherwise deteriorate food quality or even worse, endanger human health.

With particular expertise in sterile gas filtration technology, Parker domnick hunter have continually innovated novel gas filtration solutions for the food industries. The range of gas filtration products and services have been designed to deliver optimum operational performance and maintain the commitments of; protecting food quality, reducing production costs and providing specialist support for the food industries.

Filter Cartridges







HIGH FLOW BIO-X sterile gas filters combine proven depth filter technology and a pleated construction to provide retention down to 0.01 micron in gas.

Flow rates typically 2-3 times that of membrane filters make HIGH FLOW BIO-X the filter that can dramatically reduce cartridge usage and installation size within the fermentation, food and beverage industries.

The specially developed PTFE impregnation process imparts greater strength and permanent hydrophobicity to the borosilicate microfibre media. This leads to excellent performance in applications such as the provision of sterile gas in filling machines.


Features

- I High flowing hydrophic PTFE impregnated media
- I Fully validated by aerosolized bacterial and viral challenge
- Stainless steel inner core
- I 100% integrity testable by Valairdata 3 aerosol challenge

Benefits


- I Reduce system size and reduced total cost of ownership.
- I Provides complete process security
- I Strong and robust for extended service life
- I Guaranteed performance in-situ

Performance Characteristics



Filtration Stage

Sterile Gas and Vent Filtration

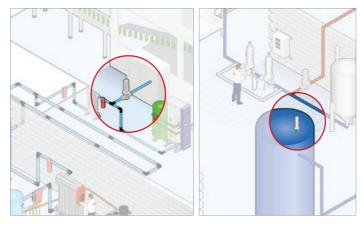



HIGH FLOW BIO-X

Specifications

Materials of Construction

PTFE Impregnated Borosilicate

Microfibre Polypropylene

I Upstream Support: I Downstream Support: Polypropylene I Inner Support Core: 316L Stainless Steel

Outer Protection Cage: Polypropylene I End Caps: Polypropylene I End Cap Insert: Polyethersulphone Standard o-rings/gaskets: Silicone

Food Contact Compliance

Parker domnick hunter's range of HIGH FLOW BIO-X filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within food and beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI - 121°C.

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 70 °C (158 °F).

The maximum recommended continuous operating temperature is 70 °C (158 °F).

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.38 m² (4.09 ft²)

Sterilization

HIGH FLOW BIO-X cartridges can be in-situ steam sterilized or autoclaved up to 142 °C (287.6 °F) for a maximum of 150 steam cycles.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Retention Characteristics

The HIGH FLOW BIO-X range of cartridges has been fully validated by aerosol bacterial challenge with challenge levels of 1012 Brevundimonas diminuta per 10" (250 mm) filter cartridge. Independent test work also shows full retention to MS-2 Coliphage.


Integrity Test Data

All cartridges are integrity tested prior to despatch by the aerosol challenge test method using the Parker domnick hunter VALAIRDATA 3.

Manufacturing Traceability

Each filter cartridge displays the product name, product code and lot number. Additionally, each module displays a unique serial number providing full manufacturing traceability.

Ordering information

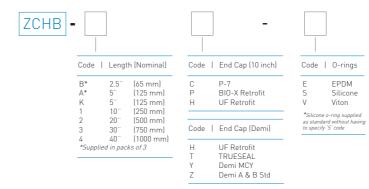

HBA & HPG AVAILABLE







BIO-X II air sterilization filter cartridges utilize a borosilicate microfibre media. This media has proven to be particularly effective in the removal of sub-micron particles as small as 0.01 micron, therefore ensuring the removal of all microorganisms, including bacteria and viruses.

The media is sandwiched between polyaramid support materials to provide additional strength and prevent media migration. This is rigidly held between stainless steel support cylinders and finally encapsulated into stainless steel end caps. The result is a filter cartridge with the exceptional strength and efficiency necessary for absolute security in the most testing of applications.

BIO-X II filter cartridges are particularly suitable for the increasing number of high temperature applications. They also fulfil the sterile compressed air and gas requirements of the dairy, brewery and food processing industries.


Features

- I Robust stainless steel componentry
- I Fully validated by aerosolized bacterial and viral challenge
- 100% integrity testable by Valairdata 3 aerosol challenge

Benefits


- I High temperature operation up to 200°C (392°F)
- I Process security under demanding conditions
- I Guaranteed performance in-situ

Performance Characteristics



Filtration Stage

Sterile Gas and Vent Filtration

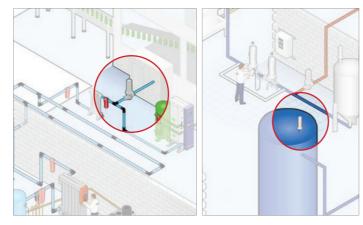





Specifications

Materials of Construction I Filtration Media: Bor

I Upstream Support: Polyaramid
I Downstream Support: Polyaramid
I Inner Support Core: Stainless Steel
I Outer Protection Cage: Stainless Steel
I End Caps: Stainless Steel
I Encapsulant: Epoxy Resin
I Standard o-rings/gaskets: Silicone

Food and Biological Safety

Parker domnick hunter's range of BIO-X II filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements for non-fibre release as laid down in the United States FDA 21 CFR 211.72 and 210,3(b).(6).

Recommended Operating Conditions

The maximum differential pressure is 700 mbar for economical element change.

Maximum Continuous Inlet Air Temperature

200 °C (392 °F) Intermittent 170 °C (338 °F) Continuous

Sterilization

BIO-X II filter elements can withstand a maximum of 100 in-line sterilization cycles with purified saturated steam. In-line sterilization 142 °C (287.6 °F), 2.8 barg (40.7 psig) for 30 minutes.

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Integrity Test Data

All cartridges are integrity tested prior to despatch by the aerosol challenge test method using the Parker domnick hunter Valairdata 3.

Retention Characteristics

The BIO-X II range of cartridges have been fully validated by bacterial challenge of aerosolized *Brevundimonas diminuta*.

Ordering information

Element Code	Cartrio	lge Length	End Cap Location					
MER-BZ MER-AZ ME10-AB7SRH ME20.AB7-SRH ME30.AB7-SRH	2.5" 5" 10" 20" 30"	[65 mm] [125 mm] [250 mm] [500 mm] [750 mm]	Demi A & B Std (Z) Demi A & B Std (Z) BS226 (C) BS226 (C) BS226 (C)					
			_					

All BIO-X cartridges are supplied as single units

BIO-X II Retrofit Cartridge Part Numbers

Parker domnick hunter Cartridge	ME3/1	ME3/1.5	ME4/1.5	ME4/2.5	ME5/2.5	ME5/3	ME10/3	ME15/3	ME20/3	ME30/3	ME30/5	
Retrofit Cartridge	SRF3/1	SRF3/1.5	SRF4/1.5	SRF4/2.5	SRF5/2.5	SRF5/3	SRF10/3	SRF15/3	SRF20/3	SRF30/3	SRF30/5	
Parker domnick hunter Cartridge	MER2/10	MER3/10	MER4/20	MER5/20	MER5/25	MER7/25	MER7/30	MER10/30	MER15/30	MER20/30	MER30/30	MER30/50
Retrofit Cartridge	SRF02/10	SRF03/10	SRF04/20	SR05/20	SRF05/25	SRF07/25	SRF07/30	SRF10/30	SRF15/30	SRF20/30	SRF30/30	SRF30/50
Parker domnick hunter Cartridge	ME2/10	ME3/10	ME4/20	ME5/20	ME5/25	ME7/25	ME7/30	ME10/30	ME15/30	ME20/30	ME30/30	ME30/50
Retrofit Cartridge	P-SRF02/10	D P-SRF03/10	P-SRF04/20	P-SRF05/20	P-SRF05/25	P-SRF07/25	P-SRF07/30	P-SRF10/30	P-SRF15/30	P-SRF20/30	P-SRF30/30	P-SRF30/50

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

HBA, HPG & HSV

HOUSING RANGE AVAILABLE Filter Cartridges

Air & Gas

TETPOR AIR





TETPOR AIR sterilization filter cartridges offer exceptional filtration performance while providing the highest levels of biosecurity throughout the process industry.

Operating at ambient temperature conditions, TETPOR AIR filter cartridges provide a cost-effective filtration solution. A unique polypropylene prefilter layer extends service life in heavily contaminated environments.

TETPOR AIR filter cartridges also utilize a well-proven, inherently hydrophobic expanded PTFE membrane validated as sterilizing grade in liquid in accordance with ASTM F838-05. This ensures the removal of all airborne bacteria, viruses and bacteriophage.


Features

- I Highly hydrophobic PTFE membrane
- I Fully validated to ASTM F838-05 liquid bacterial challenge
- I Fully validated to aerosol and viral challenge

Benefits


- I Prevents membrane blinding during high humidity conditions
- Provides sterile effluent in high humidity environments and increased product protection
- I Can be integrity tested in-situ using Valairdata 3

Performance Characteristics



Filtration Stage

Sterile Gas and Vent Filtration

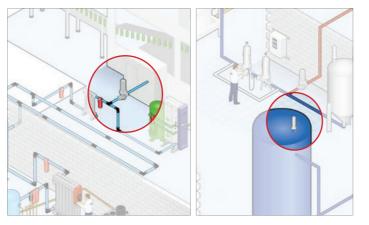



TETPOR Air Air & Gas

Specifications

Materials of Construction

I Filtration Membrane: Expanded PTFE
I Upstream Support: Polypropylene
I Downstream Support: Polypropylene

Filter Cartridges

I Inner Support Core: Polypropylene
Outer Protection Cage: Polypropylene
I End Caps: Polypropylene
I End Cap Insert: 316L Stainless Steel

Standard o-rings/gaskets: Silicone

Food Contact Compliance

Parker domnick hunter's range of TETPOR AIR filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI – 121°C.

Recommended Operating Conditions

Filter Cartridges

Up to 60 °C (140 °F) continuous operating temperature and higher short-term temperatures during CIP to the following limits:

Temp	perature	Max Fo	rward dP
°C	°F	(bar)	(psi)
20	68	5.0	72.5
40	104	4.0	58.0
60	140	3.0	43.5
80	176	2.0	29.0
90	194	1.7	24.6

Parker Hannifin certify that this product complies with the European Council Pressure Equipment Directive (PED) 97/23/ EC Article 3, Paragraph 3 - Sound Engineering Practice (SEP). This product is intended for use with Group 1 & 2 Dangerous and Harmless Liquids and Group 2 Harmless Gases at the operating conditions stated in this document: In compliance with PED Article 3, Paragraph 3, SEP, this product does not bear the CE mark.

Effective Filtration Area

10" (250 mm):	$0.77 m^{2}$	(8.28 ft2)
K Size:	$0.36m^{2}$	(3.87 ft2)
A Size:	$0.25m^{2}$	(2.69 ft2)
B Size:	$0.12m^{2}$	(1.29 ft2)
E Size:	$0.06m^{2}$	(0.64 ft2)

Sterilization

	Auto	clave	Steam-in-place		
	Cycles	Temp	Cycles (30 min		
Cartridges	120	142°C (287°F)	120	142°C (287°F)	
DEMICAP	100	135°C (275°F)	-	-	

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Integrity Test Data

All modules are integrity tested prior to despatch by diffusional flow. Values are for cartridges wetted with 60 / 40 IPA / Water.


Cartridge	Test Pressu (barg)		Diffusional Flow (ml / min)
E	0.8	11.6	1.5
B	0.8	11.6	3.0
A	0.8	11.6	6.0
K	0.8	11.6	8.3
10"	0.8	11.6	17.7

Retention Characteristics

TETPOR AIR filter cartridges are validated by bacterial challenge testing with Brevundimonas diminuta to current ASTM F838-05 methodology (10⁷ organisms / cm² EFA minimum) with typical in-house challenge levels being 1011 organisms per 10" (250 mm) filter cartridge.

In addition, TETPOR AIR filter cartridges are also validated by aerosol bacterial and MS-2 coliphage challenge testing.

Ordering information

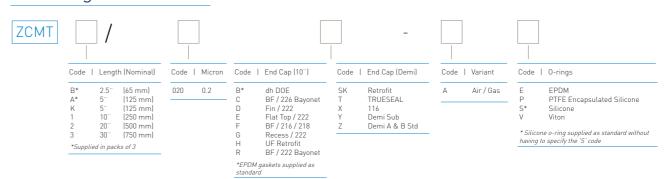

HBA, HPG & HSV HOUSING RANGE AVAILABLE

HIGH FLOW TETPOR II Air & Gas

Filter Cartridges





HIGH FLOW TETPOR II gas sterilization filters have been developed to benefit from technological advances within the manufacture of PTFE membranes. This new generation of filter sets the standard with an unrivalled combination of efficiency, flow rate and strength.

The HIGH FLOW TETPOR II is validated as a 0.2 micron sterilizing grade filter in liquids through ASTM F838-05 and 0.01 micron in gas through full retention to an aerosol challenge of MS2 phage. This ensures the filter will guarantee the sterility of your process in the worst-case scenario where the filter may be subjected to bulk liquid due to a process problem. Subtle changes to the structure of the hydrophobic PTFE have also resulted in the production of an extremely robust product now validated for 225 steam sterilization cycles @ 142 °C (287.6 °F). The combination of non-woven supports upstream of the membrane and an expanded net layer downstream has significant benefits. It provides increased protection and service life while guaranteeing zero fibre shedding into the process.


Features

- I Highly hydrophobic PTFE membrane
- I Fully validated to ASTM F838-05 liquid bacterial challenge
- I Fully validated to aerosol and viral challenge
- I Unique high flowing PTFE membrane
- I Can be in-situ steam sterilized for up to 225 cycles at 142°C

Benefits


- I Prevents membrane blinding during high humidity conditions
- I Provides sterile effluent in high humidity environments and increased
- I Increased energy savings due to reduced pressure loss
- I Long service life under aggressive processing conditions

Performance Characteristics



Filtration Stage

Sterile Gas and Vent Filtration

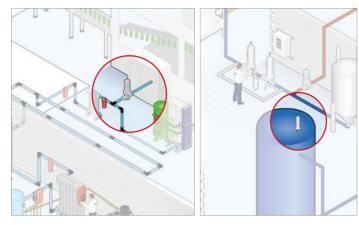

Specifications

Materials of Construction

I Filtration Media: Expanded PTFE I Upstream Support: Polypropylene ■ Downstream Support: Polypropylene I Inner Support Core: 316L Stainless Steel Outer Protection Cage: Polypropylene I End Caps: Polypropylene End Cap Insert: Polysulphone

Food Contact Compliance

Standard o-rings/gaskets: Silicone

Parker domnick hunter's range of HIGH FLOW TETPOR II filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21 CFR part 177 and USP Plastics Class VI - 121°C

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 60 °C (140 °F).

The maximum recommended continuous inlet air temperature is 60 °C (140 °F).

Note: HIGH FLOW TETPOR II cartridges can be used as WFI vents in heated housings if changed on a 4-6 monthly basis.

Sterilization

HIGH FLOW TETPOR II cartridges can be in-situ steam sterilized for up to 225 cycles at 142 °C (287.6 °F).

For detailed operational procedures and advice on cleaning and sterilization, please contact the Technical Support Group through your usual Parker domnick hunter contact.

Retention Characteristics

HIGH FLOW TETPOR II cartridges have been fully validated as 0.2 micron sterilizing grade filter cartridges, for compressed air and gas applications. They exceed liquid bacterial challenge levels as recommended by ASTM+. In addition, HIGH FLOW TETPOR II is also validated by aerosol bacterial and MS-2 Coliphage challenge testing. +ASTM American Society for Testing and Materials

Integrity Test Data

All modules are integrity tested prior to despatch by diffusional flow. Values are for cartridges wetted with 60 / 40 IPA / Water.

Cartridge	Test Pressur	е	Diffusional Flow
	(barg)	(psig)	(ml / min)
D	0.8	11.6	0.6
C	0.8	11.6	1.1
В	0.8	11.6	2.8
Α	8.0	11.6	5.6
K	8.0	11.6	7.70
10"	8.0	11.6	16.5
20	8.0	11.6	33.0
30	8.0	11.6	49.5

Ordering information



HBA, HPG & HSV OUSING RANGE AVAII ARI F

HIGH FLOW PREPOR GFA Air & Gas

Filter Cartridges





HIGH FLOW PREPOR GFA is a high capacity glass fibre prefilter specifically designed for the removal of bulk particulate from compressed air and gases.

It is used extensively for prefiltration duties in dry compressed air systems and provides excellent protection for final sterile filters.

HIGH FLOW PREPOR GFA utilizes pleated glass fibre filter media encased within an upstream and downstream expanded polypropylene mesh filter support. The pleat pack is supported by an inner stainless steel core and outer heat stabilized polypropylene cage, heat bonded to heat stabilized polypropylene end caps.

The combination of high voids volume filter media and pleated construction results in a filter cartridge with exceptional dirt holding capacity, able to operate at very low differential pressures.


Features

- I High surface area and voids volume filter media
- I Reliable efficient protection of final sterilization filters
- Retention to 1.0µm in gas

Benefits


- I Exceptionally high flow rates with low pressure drops
- I Reliable efficient protection of final sterilization filters
- Heat stabilized componentry to allow operation at elevated temperatures

Performance Characteristics



Filtration Stage

Particulate Removal

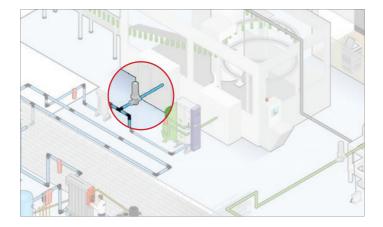



HIGH FLOW PREPOR GFA Air & Gas

Specifications

Materials of Construction

I Filtration Media: Glass Microfibre

I Upstream Support: Polypropylene

I Downstream Support: Polypropylene

I Inner Support Core: 316L Stainless Steel

I Outer Protection Cage: Polypropylene

Polypropylene

I End Cap Insert: Stainless SteelI Standard o-rings/gaskets: Silicone

Food Contact Compliance

I End Caps:

Parker domnick hunter's range of HIGH FLOW PREPOR GFA filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21CFR part 177 and USP Plastics Class VI – 121°C.

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 20 °C (68 °F).

The maximum recommended continuous operating temperature is 70 °C (158 °F).

Note: For temperatures from 70 °C (158 °F) to 100 °C (212 °F) a special product with polyester supports is available.

Effective Filtration Area (EFA) 10" (250 mm) 0.48 m2 (5.16 ft2)



HBA HOUSING RANGE AVAILABLE Filter Cartridges





PEPLYN AIR filter cartridges have been specifically designed to guarantee removal of particulate from gas

They can be used to protect sterilizing grade filters in pressurized systems or in exhaust gas vent applications.

PEPLYN AIR is particularly suitable for:

- Inlet gas in the fermentation industry as protection to sterilizing grade filters where polypropylene media is
- As protection to sterilizing grade filters in exhaust gas systems
- Vent applications
- Systems where high particulate loading is expected

PEPLYN AIR has the ability to be steam sterilized and has a broad range of chemical compatibility


Features

- I Strong and durable polypropylene filtration media
- I Graded density, pleated construction

Benefits


- I Effective particle retention and steam sterilizable capability
- I High flow rate and long service life

Performance Characteristics



Filtration Stage

Particulate Removal

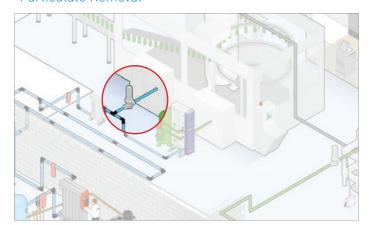

Specifications

Materials of Construction

I Filtration Media: Polypropylene I Upstream Support: Polypropylene Downstream Support: Polypropylene I Inner Support Core: 316L Stainless Steel Outer Protection Cage: Polypropylene

I End Caps: Polypropylene Standard o-rings/gaskets: Silicone

Food Contact Compliance

Parker domnick hunter's range of PEPLYN AIR filters are intended for indirect food contact and as such are manufactured from materials suitable for the sterilization of compressed gasses within Food and Beverage applications. Materials conform to the relevant requirements of the United States FDA 21CFR part 177 and USP Plastics Class VI - 121°C.

Recommended Operating Conditions

The maximum differential pressure in direction of flow (outside to in) is 3.5 barg (50.76 psig) at 20 °C (68 °F).

The maximum recommended continuous operating temperature is 50 °C (122 °F).

Effective Filtration Area (EFA)

10" (250 mm) Up to 0.48 m² (5.16 ft²)


Cleaning and Sterilization


PEPLYN AIR cartridges can be repeatedly in situ steam sterilized or autoclaved up to 142 °C (287.6 °F).

Determination of Micron Ratings

Particle removal efficiencies of PEPLYN AIR cartridges have been determined independently by challenging with a cut silica test dust, generated by BUS1701 dust injector used in conjunction with laser particle counters.


Micron Efficiency Ratings






Ordering information






^{*} Supplied in packs of 3



Code | End Cap (Demi)

T	TRUESEAL
Y	Demi Stub
Z	Demi A & B Std



^{*} Silicone o-ring supplied as standard without having to specify the 'S' code

HBA **OUSING RANGE** AVAILABLE







Parker domnick hunter commitments



David Harrison -

The same of

THE RESERVE AND ADDRESS OF

The same of

STATE OF THE PERSON NAMED IN

SHARE SHARES AND

STREET, STREET, ST.

the same of

AND DESCRIPTION OF THE PARTY OF

THE RESERVE OF

The same of the last of the la

The party of the last

The same of the same of

The same of the same of

AND ADDRESS OF

The same of the sa

District Lines

Account named

A ALLES AND DESCRIPTION OF

المستنس يستعلم

THE RESERVE WAS TO SERVE THE PARTY OF THE PA

DESIGNATION OF THE PERSON OF T

THE RESERVE OF THE PERSON NAMED IN COLUMN

THE REAL PROPERTY.

THE RESERVE WAS TAKEN

THE HALL WEST

THE RESERVE OF

THE REAL PROPERTY.

THE THIRD WAS

Instruments collection

There is a growing trend for higher quality and more consistent products manufactured by the food industry. In order to remain competitive, manufacturers must continually strive for better process control to eliminate hazards which could affect the quality and consistency of the foods they produce.

In order to help food manufacturers overcome the challenges of producing safe foods consistently without non-conformance or wastage, adoption of the principles outlined in the HACCP framework has become mandatory (ref: EU Regulation 852/2004). Routine integrity testing of critical filters offers a way of ensuring the on-going performance of critical filtration systems and ensures the food production plant operates in line with the HACCP principles.

Parker domnick hunter offer a range of automated integrity test instruments used to check the integrity of critical liquid or gas filters. The instruments satisfy the food industry requirements for filter testing by offering automated operation, accurate detection of filter integrity and easy documentation and management of test results.

Valairdata 3 is the next generation of fully automated, aerosol challenge integrity test unit, designed to test the integrity of sterile gas filters quickly and easily.

The Valairdata 3 aerosol challenge test is fully correlated to aerosolized *B.diminuta*, *B.subtilis* and Enterobacteria phage MS2 challenges and is a recommended test methodology in the PDA's "Sterilizing Filtration of Gas – Technical Report #40".

The unit utilizes Parker domnick hunter's 40 years of experience in the provision of world leading sterile gas solutions by further improving the usability and sensitivity of the test process and offers significant savings in operator time.

Features


- 5.7" TFT LCD touch screen operation
- I Multi-language menu availability
- I Testing correlated to aerosol and viral challenges
- Developed to GAMP 5 guidelines
- I Transfer of data via USB memory stick
- I 4GB internal memory storage

Benefits

- I Easy to use
- I Portable for in-situ testing around the facility
- Quick determination of a filter's ability to sterilize gas around 30 second test time for 10"housing, 5 seconds for discs
- Increased sensitivity compared to liquid based tests, especially on multi-cartridge systems
- I No unit specific PC software required

Filtration Stage

Sterile Gas and Vent Filtration

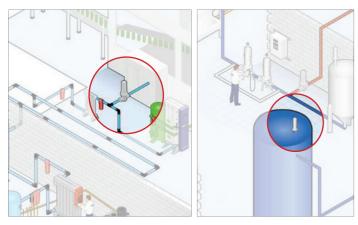

I Weight: I Instrument size:

Specifications

Instrument size: Width: 363 mm Height: 308 mm Depth: 155 mm

l Electrical requirement: Battery operated

3.2V / 16Ah & mains 100-240 VAC : 50/60 Hz

■ Laser: Type: Solid state laser diode Power: 24 Volts DC

Sample flow rate: 0.1cfm

I Aerosol generator: Aerosol generated from Purity™ FGW015 white mineral oil FDA:178-3620

8 kg

LVD - EN61010-1-1 EMC - EN61326-1

I Pneumatic requirements: Input pressure: 4.5 to 7 barg clean dry air

Pneumatic Rectus 21 KA connections

■ Packaging: Waterproof and airtight solid case for

Padded carry bag for site portability

Languages: English, German, French, Swedish, Italian,

Portuguese, Danish and Spanish

Instrument Options

	WVA-3-ST Standard	WVA-3-SE Secure
Design environments approvals:	GAMP 5	GAMP 5
■ 21CFR Part 11:	No	Yes (transferred data is user's responsibiity)
Security user levels:	Operator Administrator	Operator - password protected Administrator - password protected
Audit trail:	No	Yes

Ordering information



Calibration code: 609500026

Customer Support

Parker domnick hunter can offer full after sales support worldwide, whether it is commissioning of the instrument, calibration / service or full training of site operators.



BEVCHECK & BEVCHECK PLUS

Integrity Test Units





Monitoring performance and product quality

Simple routine integrity testing for the beverage industry.

BEVCHECK

The BEVCHECK is an easy to use, portable unit that allows you to test the integrity of your membrane filters using the pressure decay method. Test data can be reported as pressure decay or diffusional flow.

BEVCHECK is a small hand held unit, or is light enough to be mounted directly on to a connection on the filter housing. Software included with the unit enables it to be connected to a PC for enhanced programming and data handling flexibility.

BEVCHECK PLUS

The BEVCHECK PLUS provides an automated method for testing membrane filter cartridges used in beverage applications. Using the pressure decay method, the unit controls the whole test from increase of pressure, through stabilization and pressure decay measurement, to release of pressure.

Test data can be reported as pressure decay or diffusional flow and is provided in a printed summary. The unit is small enough to be portable around the production facility, or can be positioned centrally for remote connection to the filter housings.





- Large memory stores up to 19 programs and 100 test reports
- Flexible suitable for use with compressed air or nitrogen
- Accommodates a wide range of filter retention ratings and housing sizes
- Clear liquid crystal display and wipe clean keypad
- · Self test function automatically checks the function of the unit
- PC interface and software provides additional programming and data handling flexibility
- IP53 protection class
- Hand held portability with rechargeable battery operation
- Convenient built-in printer provides printed test report (PLUS)





Physical Parameters

my sicutif af afficers
Housing Material Instrument Size Weight
Ingress Protection Class
Power Supply
1 one: Juppy
Battery Life (From Full Charge) Keyboard
Inlet Pressure Required
Operation Temperature
Pneumatic Connectors
The difficulty of the control of the
Storage Temperature Ambient Humidity Display
Printer
Language
Storable Test Programs
Storable Test Records
Test Pressure Control
Test Pressure Range
Housing Volume Range
Diffusional Flow Range
Stabilisation Time Range
Test Time Range
Interfaces
Documentation / Ancillaries.

BEVCHECK

ABS (WxDxH) 105 mm x 210 mm x 45 mm (4" x 8 25" x 1 75") 0.5 Kg (1.1 lbs)

Re-Chargeable HiMH Battery (4.8 V / 1.5 Ah) & External Charger (100- 230V AC / 47 - 63 Hz / 7.5V 1.33A) 7 hours Typ.

16 Key - Polycarbonate Keypad 0 - 4000 mbar 3 - 33 °C (37.4 - 91.4 °F) Compressed Air / Filter : Rectus 21 Male

> 3 - 35 °C [37.4 - 95 °F] 5 - 95% Rel.

LCD - 16 Character x 2 Lines None

English, German, Italian, French, Spanish & Portugese 19 100

Manual (Additional Accessory Kit Required)

0 - 4000 mbar 10 - 999999 ml

1 - 99.9 ml / min

1 - 1800 secs 1 - 1800 secs

PC Data / Remote Operation RS232 4-Pole lack

Power Supply /

CE Declaration of Conformity Winfilter PC Software

BEVCHECK

Charger with Country Specific Mains Adaptor PC Comms Cable (RS232 - 4 Pole Jack to 9 Pin Male) Installation, Operation & Maintenance Instructions (IOMI) Foam Lined Carry Case

BEVCHECK PLUS

Polystyrol [WxDxH] 315 mm x 280 mm x 150 mm [12.5"x 11" x 6"] 3.9 Kg (8.6 lbs)

HiMH Battery (4.8 V / 1.5 Ah) & External Charger / Mains [230V AC:18V DC, 1.7A / 230V AC:15V AC, 15VA]

2 hours Typ. 16 Key - Polycarbonate Keypad

0 - 4500 mbar 3 - 30 °C (37.4 - 95 °F)

Compressed Air / Filter : Festo 4 mm Stäuhi RRE03 Male Vent - Festo 4 mm 3 - 35 °C [37 4 - 86 °F]

5 - 95% Rel.

LCD - 20 Character x 4 Lines Built in Thermal Printer - 57 mm Printer English, German, Italian, French, Spanish & Portugese

100

Fully Automatic 0 - 3900 mbar 10 - 999999 ml

1 - 999.9 ml / min 1 - 1800 secs 1 - 1800 secs

D-Sub 25 Pole PC Data / Remote Operation RS232 9-Digit Male

> CE Declaration of Conformity Calibration Certificate Winfilter PC Software

> > Power Supply /

Charger with Country Specific Mains Adaptor PC Comms Cable (RS232 - 4 Pole Jack to 9 Pin Male) Installation, Operation & Maintenance Instructions (IOMI) Foam Lined Carry Case

BEVCHECK PLUS

Ordering Information

WBC-230 WBC-BEVCHECK PLUS 609500028 609500091

Calibration order code.





Parker domnick hunter commitments

Housings collection

Selecting the correct filter housing for an application is as important as selecting the correct filter. Parker domnick hunter offer a range of housings for the filtration of both liquids and gases to meet the stringent requirements of food and beverage applications.

From single demi-housings for point-of-use gas flows, to multi-round liquid housings for final filtration of your product, we can supply housings in a wide range of connection sizes and finishes to meet any flow rate or application requirements.

- Liquid prefiltration
- Liquid final filtration
- Gas filtration
- Vent filtration
- Steam filtration

Focussed on meeting specifications and legislations relevant to the food and beverage industries, our housings are manufactured from 316L stainless steel for all product contact surfaces, and are designed to achieve optimal flow and lowest differential pressure for maximum efficiency.



- Industrial liquid housing for prefiltration and clarification duties
- STANDARD product
- BSP (G) or NPT connections and standard finish
- PLUS product
- Available in 3 different vessel classes: Standard (CE), Atex and High Pressure
- Standard and electropolished surface finishes
- A number of inlet / outlet port connections
- Choice of BSP (G) / ISO 228, NPT or no vent
- Choice of BSP (G) / ISO 228 or NPT drain
- Option of C (226) location and fabricated (not cast) head

Specification

STANDARD Range Materials of Construction

Cast Head - Stainless Steel Housing: Bowl - 316L - Stainless Steel

Seals: 304 Stainless Steel ■ Clamps:

Surface Finish

Internal: As Welded

Polished 0.8 µm Ra (32 µIn Ra) ■ External:

All finished pickled and passivated

PLUS Range Materials of Construction

Cast Head - 316L Stainless Steel Housing: Bowl - 316L - Stainless Steel

Seals: EPDM FDA PTFE FDA

Silicone FDA Viton® / FKM FDA 304 Stainless Steel

I Clamps:

Surface Finish Two Finishes Available

Standard Finish

Head-Cast. Pickled and Passivated Bowl Internal: As Welded

Pickled and Passivated

Bowl External: Polished 0.8 µm Ra (32 µln Ra)

I Standard Electropolished Finish Head-Cast, Electropolished Bowl Internal: Electropolished

Bowl External: Polished 0.8 µm Ra (32 µln Ra)

All finished pickled and passivated

Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.

STANDARD Range

Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	011	012	013		
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg [145 psig]		
Dangerous	Liquid / Gas	150 °C (302 °F)	5 barg (73 psig)	5 barg (73 psig)	5 barg [73 psig]		
PED Conformity Assessment Category		SEP	CATI	CAT I			
Volume (litres)			3.2	5.1	7.0		

PLUS Range

CE Working Condition PED 97/23/EC				Maximum Pressure					
Fluid Group	State	Temperature		011	012	013	014		
Non Dangerous	Gas / Vapour	150 °C (302 °F)		10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)		
Dangerous	Gas / Vapour	150 °C (302 °F)		5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)		
Non Dangerous	Liquid	150 °C (302 °F)		10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)		
Dangerous	Liquid	150 °C (302 °F)		5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)		
PED Conformity Assessment Category		Code B & D Code C	SEP SEP	CAT I SEP	CAT I CAT I	CAT I CAT I			
Volume (litres)		Code B & D Code C	3.2 2.9	5.1 4.8	7.0 6.7	8.9 8.6			

ATEX Working Condition PED 97/23/EC				Maximum Pressure					
Fluid Group	State	Temperature		011	012	013	014		
Non Dangerous	Gas / Vapour	135 °C (275 °F)		10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)		
Dangerous	Gas / Vapour	135 °C (275 °F)		5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)		
Non Dangerous	Liquid	135 °C (275 °F)		10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)		
Dangerous	Liquid	135 °C (275 °F)		5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)		
PED Conformity Assessment Category		Code B & D Code C	SEP SEP	CAT I SEP	CAT I CAT I	CAT I CAT I			
Volume (litres)		Code B & D Code C	3.2 2.9	5.1 4.8	7.0 6.7	8.9 8.6			

High Pressure	Working Cond	dition PED 97/23/EC		Maximum Pressure						
Fluid Group	Fluid Group State Temperature			011	012	013	014			
Non Dangerous Gas / Vapour 205 °C [401 °F]			16 barg (232 psig)	16 barg [232 psig]	16 barg (232 psig)	16 barg (232 psig)				
PED Confo	PED Conformity Assessment Category			CAT I 2.9	CAT I 4.8	CAT I 6.7	CAT I 8.6			
Volume (litres)			Code B & D Code C	3.2 SEP	5.1 CAT I	7.0 CAT I	8.9 CAT I			

Note: All housings are full vacuum rated.

HIL Filter Housings

Industrial Liquid







Physical Characteristics

Bowl Height	'A'	imensions (mn 'B'	,C.	Bowl	Typical Weigh Head	it Total
250 mm (10")	150 mm (5.9")	441 mm (17.4")	297 mm [11.7"]	1.5 Kg (3.3 lbs)	1.2 Kg (2.6 lbs)	3.8 Kg [8.4 lbs]
500 mm (20")	150 mm (5.9")	691 mm (27.2")	550 mm (21.7°)	2.5 Kg (5.5 lbs)	1.2 Kg (2.6 lbs)	4.9 Kg (10.8 lbs)
750 mm (30)	150 mm (5.9")	936 mm (26.9°°)	814 mm (32.0")	3.5 Kg (7.7 lbs)	1.2 Kg (2.6 lbs)	6.0 Kg (13.2 lbs)


Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter.

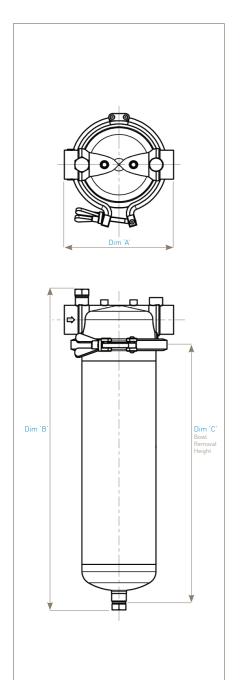

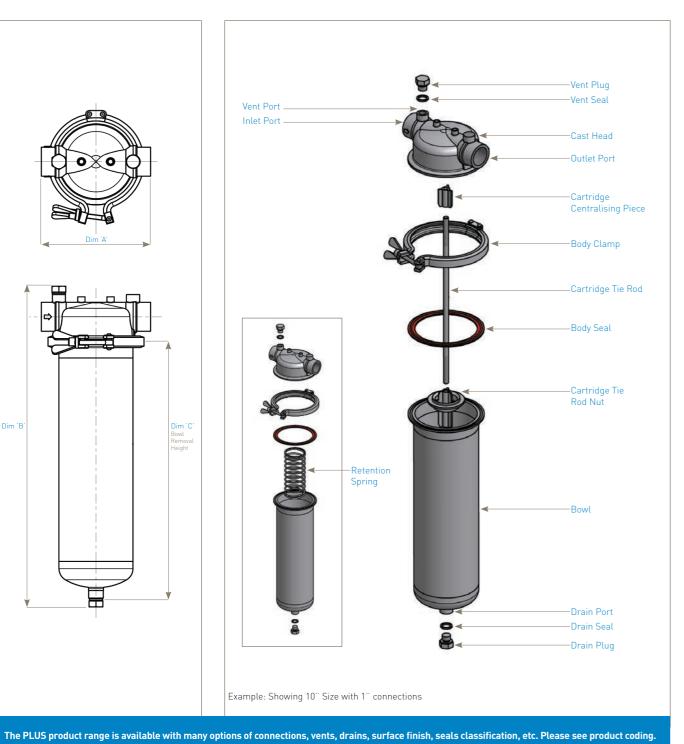





STANDARD Range - 10" to 30"



PLUS Range - 10" to 40"

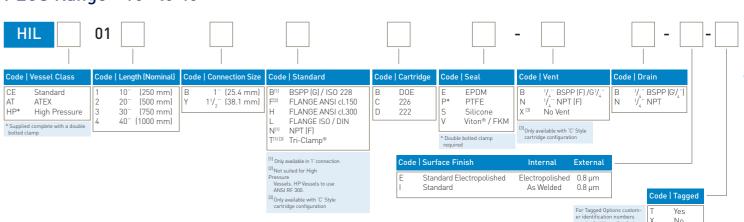

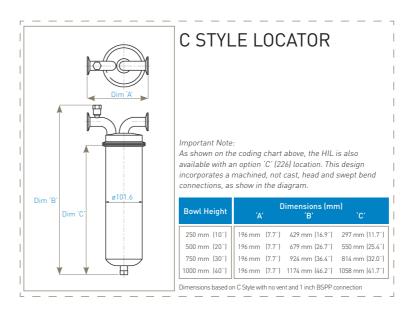

Tri-Clamp® is a trademark of Alfa-Laval, Inc. Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

HIL Multi Filter Housings Industrial Liquid

HIL Multi Filter Housings

Industrial Liquid





- Flow efficient range of multi element industrial liquid housings
- Designed specifically for prefiltration and clarification applications
- Available with a number of inlet/outlet port connections
- Standard and electropolished surface finishes
- Suitable for cartridge types:
- DOE or 222 (10"to 40")
- Option for ATEX compliance directive 94/9/EC

Specification

STANDARD Range Materials of Construction

Housing: 316L Stainless SteelSeals: EPDM FDA

Seals: EPDM FDA Silicone FDA

Viton® / FKM FDA 304 Stainless Steel

Two Finishes Available

Standard Finish 'I'

Clamps:

Internal: As Weld

Pickled and Passivated

External: Polished 0.8 µm Ra (32 µIn Ra)

■ Electropolished Finish 'E'

Internal: As Welded
Electropolished
External: Electropolished 0.8 µm Ra

(32 µIn Ra)

Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate and EC Declaration of conformity.

Material Test Certification

EN10204 3.1/2.2 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.


Design Basis


ASME VIII Division 1.

CE Workin	ng Condition PEC	Max	Maximum Pressure +FV			
Fluid Group	State	Temperature	3 Round	5/7 Round	8/10 Round	
Non Dangerous	Liquid	-10 °C (14 °F) to 150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	
Non Dangerous	Gas		8 barg (116 psig)	4 barg (58 psig)	3 barg (44 psig)	
PED Co	onformity Assess	CAT I	CAT I	CAT I		

ATEX Workin	g Condition PED	Max	Maximum Pressure +FV				
Fluid Group	State	Temperature	3 Round	5/7 Round	8/10 Round		
Non Dangerous	Liquid	-10 °C (14 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)		
Non Dangerous	Gas	to 135 °C (275 °F)	8 barg (116 psig)	4 barg (58 psig)	3 barg (44 psig)		
PED Co	nformity Assessi	ment Category	CAT I	CAT I	CAT I		

Note: All housings are full vacuum rated.

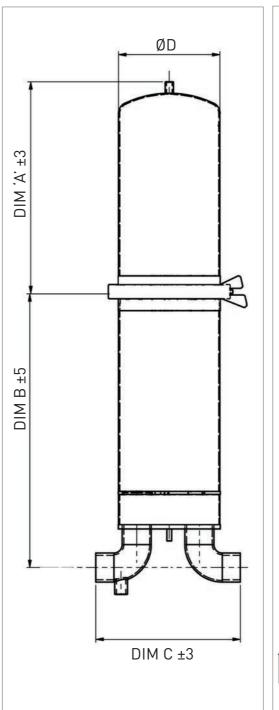

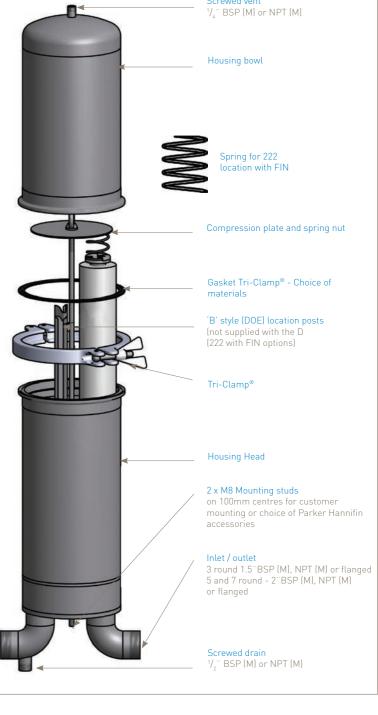

				Dimer	Approximate weight and volume					
		A'	B'	C'			,D,	BOWL	TOTAL	VOLUME
			В	BSP (M)	NPT (M)	FLANGED	U	BUWL	(Threaded version only)	VULUME
3 ROUND	10" 20" 30" 40"	101 mm (4.0 in) 348 mm (13.7 in) 598 mm (23.5 in) 848 mm (33.4 in)	455 mm (17.9 in)	230 mm (9 in)	230 mm (9 in)	294 mm (11.6 in)	168 mm (6.6 in)	2.0 kg (4.4 lbs) 4.0 kg (8.8 lbs) 6.0 kg (13.2 lbs) 8.0 kg (17.6 lbs)	8.9 kg (21.0 lbs) 11.0 kg (24.0 lbs) 13.1 kg (29.9 lbs) 15.2 kg (33.5 lbs)	10.4 L (2.75 USg) 15.7 L (4.15 USg) 21.0 L (5.5 USg) 26.3 L (6.8 USg)
5 & 7 ROUND	10" 20" 30" 40"	109 mm (4.3 in) 360 mm (14.2 in) 610 mm (24.0 in) 860 mm (33.9 in)	468 mm (17.7 in)	296 mm [11.7 in]	296 mm (11.7 in)	347 mm (13.7 in)	219 mm (8.6 in)	1.6 kg (3.5 lbs) 4.4 kg (9.7 lbs) 7.1 kg (15.6 lbs) 9.8 kg (21.6 lbs)	12.9 kg (28.0 lbs) 15.7 kg (35.0 lbs) 18.4 kg (41.0 lbs) 21.1 kg (46.5 lbs)	18.0 L (4.6 USg) 27.0 L (7.0 USg) 36.0 L (9.3 USg) 45.0 L (11.7 USg)


Refer to coding structure for configuration options.


HIL Multi Filter Housings



Industrial Liquid

M•F LTER

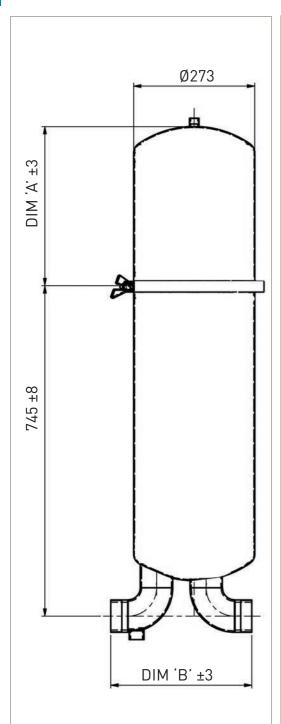

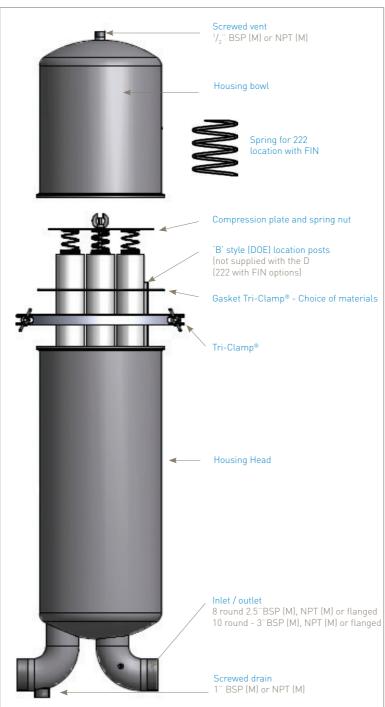


			Dimensions				Approximate weight and volume			
	A'			B'		BOWL	TOTAL	VOLUME		
			BSP (M)	NPT (M)	FLANGED	BUWL	(Threaded version only)	VULUME		
8 ROUND	20" 30" 40"	107 mm (4.2 in) 357 mm (14 in) 607 mm (24 in)	316 mm [12.4 in]	332 mm (13.1 in)	356 mm (14 in)	2.2 kg (5.0 lbs) 5.7 kg (12.5 lbs) 9.0 kg (20 lbs)	20.0 kg [44.0 lbs] 23.5 kg [52.0 lbs] 27.0 kg [60.0 lbs]	42.0 L [11.1 USg] 56.0 L [14.8 USg] 69.0 L [18.2 USg]		
10 ROUND	20" 30" 40"	107 mm (4.2 in) 357 mm (14 in) 607 mm (24.0 in)	410 mm [16.1 in]	410 mm (16.1 in)	382 mm (15 in)	2.2 kg (5.0 lbs) 5.6 kg (12.3 lbs) 9.0 kg (20 lbs)	22.2 kg [49.0 lbs] 25.6 kg [56.4 lbs] 29.0 kg [63.9 lbs]	45.0 L [11.9 USg] 59.3 L [15.7 USg] 73.5 L [19.4 USg]		

Refer to coding structure for configuration options.





Product coding

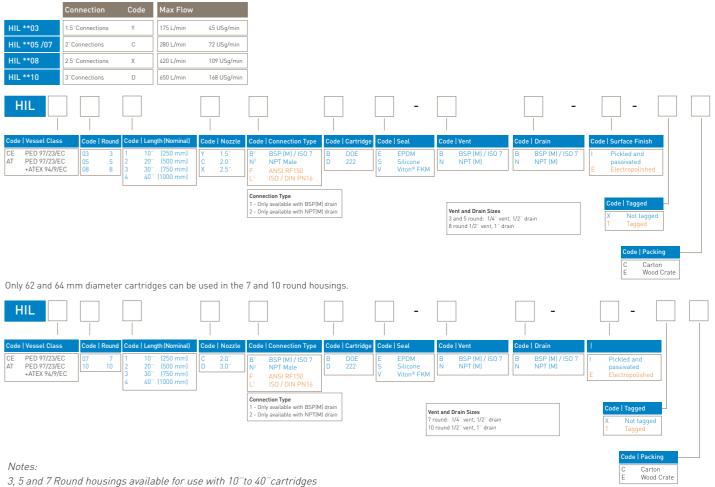

Delivery schedules (excluding shipping)

8 and 10 Round housings available for use with 20" to 40" cartridges

Blue Options - 2-3 working weeks
Orange Options - 4-5 working weeks

Tri-Clamp® is a trademark of Alfa-Laval, Inc.
Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

HIL Multi Filter Housings

Industrial Liquid





Accessories

Adjustable legs.

Accessory Kit

3 round 639504203 (XLGSS12IL1)

5 and 7 round 639504204 (XLGSS12IL2)

8 and 10 round 639504205 (XLGSS13IL1)

Adjustable legs giving centre to floor height adjustment between 50 and 375 mm for 3,5 and 7 round and 50-300 mm for 8 and 10 round. (clearance required for drain)



Fixed legs.

Accessory Kit 3, 5 and 7 round only 639504206 (XLGSS12IL3)


Fixed base support for M8 mounting studs giving centre to floor height of 230 mm. Vessel to be properly supported on the pipework as close as possible to the inlet/outlet.




Customer mounting, 3, 5 & 7 round only.

Two M8 mounting studs are provided as shown to allow the customer to custom mount the housing as they require, alternatively we provide accessories shown.

M•F LTER



Note A Gap available for 50 mm (2 in) wide support.

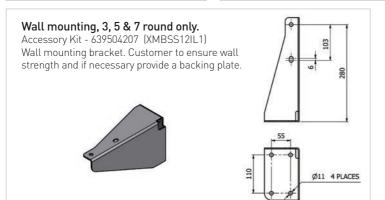

HIL Pressure Gauge									
Туре	Connection	Pressure	Ordering Code						
All stainless steel wetted parts with glycerine fill fluid (includes adapter for assembly to	1/ ₄ " / 1/ ₂ " BSP	0 - 10 barg	639504201 (XPGSS03BS01)						
housing. Also includes adaptor for connecting vent valve (1/, "BSP(F) / 1/, "NPT (F))	1/4" / 1/2" NPT	0 - 10 barg	639504202 [XPGSS03NP01]						



Industrial 1 Piece Ball Valve									
Туре	Connection	Ordering Code							
	1/ ₄ BSP	639502594 (XVASS03BS6)							
	1/ ₄ NPT	639504220 (XVASS03NP1)							
316 stainless steel 1 piece ball valve	1/2 BSP	639502595 (XVASS04BS1)							
with PTFE ball. Female / female.	1/ ₂ NPT	639504221 (XVASS04NP2)							
	1" BSP	639504218 (XVASS05BS3)							
	1" NPT	639504219 (XVASS05NP1)							



Sanitary Liquid





- Single element sanitary liquid housing
- Designed specifically for the food & beverage and pharmaceutical industries
- Sanitary tri-clamp body closure as standard
- STANDARD product
- Sanitary surface finish
- Tri-clamp connections
- PLUS product
- Available in 3 different vessel classes:
 Standard (CE), Atex and High Pressure
- Sanitary or sanitary electropolished surface finish options
- Wide range of vent and drain connections
- Choice of gasket and seal materials

Specification

STANDARD Range Materials of Construction

I Housing: 316L Stainless SteelI Seals: Silicone FDAI Clamps: 304 Stainless Steel

Surface Finish

I Internal: Polished 0.4 μm Ra (16 μln Ra)
I External: Polished 0.25 μm Ra (10 μln Ra)

All finishes pickled & passivated.

PLUS Range Materials of Construction

I Housing: 316L Stainless Steel
I Seals: EPDM FDA
PTFE FDA

Silicone FDA Viton® / FKM FDA 304 Stainless Steel

Clamps:

Surface Finish

Sanitary Finish

Internal: Polished 0.4 µm Ra (16 µln Ra)
External: Polished 0.25 µm Ra (10 µln Ra)

I Sanitary Electropolished Finish

Internal: Electropolished 0.4 µm Ra

(10 hill va)

and Electropolished xternal: Polished 0.25 µm Ra (10 µln Ra)

Velding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.



HSL Filter Housings Sanitary Liquid

Standard Range

Wo	orking Condition PEC	97/23/EC	Maximum Pressure							
Fluid Group	State	Temperature	01A	01B	011	012	013			
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10 barg (145 psig)							
Dangerous	Liquid / Gas	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)	5 barg (72.5 psig)	5 barg (72.5 psig)			
PED (Conformity Assessm	nent Category	SEP	SEP	SEP	SEP	CAT I			
	Volume (litre	s)	0.75	0.5	2.9	4.8	6.7			

Plus Range

CE	Working Condition PED 97/23/EC			Maximum Pressure							
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014		
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)								
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)						
Non Dangerous	Liquid	150 °C (302 °F)	10 barg (145 psig)								
Dangerous	Liquid	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)						
PED Conformity Assessment Category Volume (litres)			SEP	SEP	SEP	SEP	SEP	CAT I	CAT I		
			0.75	0.5	1.7	2.9	4.8	6.7	8.6		

ATEX Working Condition PED 97/23/EC				Maximum Pressure							
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014		
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10 barg (145 psig)								
Dangerous	Gas / Vapour	135 °C (275 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)						
Non Dangerous	Liquid	135 °C (275 °F)	10 barg (145 psig)								
Dangerous	Liquid	135 °C (275 °F)	10 barg (145 psig)	10 barg (145 psig)	5 barg (72.5 psig)						
PED Conformity Assessment Category Volume (litres)			SEP	SEP	SEP	SEP	SEP	CAT I	CAT I		
			0.75	0.5	1.7	2.9	4.8	6.7	8.6		

High Pressure	Working Con	dition PED 97/23/EC				Maximum Pres	sure			
Fluid Group	uid Group State Temperature		01A	01B	01K	011	012	013	014	
Non Dangerous Gas / Vapour / Liquid		205 °C (401 °F)	16 barg (232 psig)							
PED Conformity Assessment Category Volume (litres)			SEP	SEP	SEP	SEP	CATI	CAT I	CAT I	
			0.75	0.5	1.7	2.9	4.8	6.7	8.6	

Note: All housings are full vacuum rated.

HSL Filter Housings

Sanitary Liquid







Physical Characteristics

Bowl Height	'A'	Dimensions (mr 'B'	,C. w)	Typical Weight
A Size 125 mm (5")	117 mm (4.6")	191 mm (7.5)	130 mm (5.1")	2.0 Kg [4.4lbs]
B Size 65 mm [2 ¹ / ₂]	117 mm (4.6")	136 mm [5.4"]	70 mm (2.8")	1.8 Kg [3.9lbs]
250 mm (10")	156 mm (6.1")	417 mm [16.4"]	313 mm [12.3"]	3.8 Kg (8.3 lbs)
500 mm (20")	156 mm (6.1")	667 mm (26.3)	561 mm (22.1")	4.8 Kg (10.5 lbs)
750 mm (30)	156 mm (6.1")	912 mm (35.9°°)	809 mm (31.8")	5.7 Kg (12.5 lbs)
1000 mm (40°)	156 mm (6.1")	1160 mm [45.7"]	1057 mm (41.6")	6.7 Kg [14.7 lbs]

 $Dimensions shown are based on the STANDARD range. \ For accurate dimensions, please contact Parker domnick hunter than the standard properties of the prop$

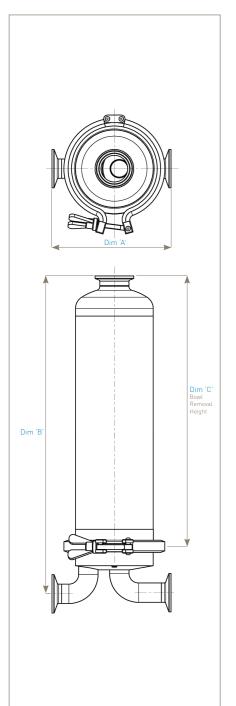


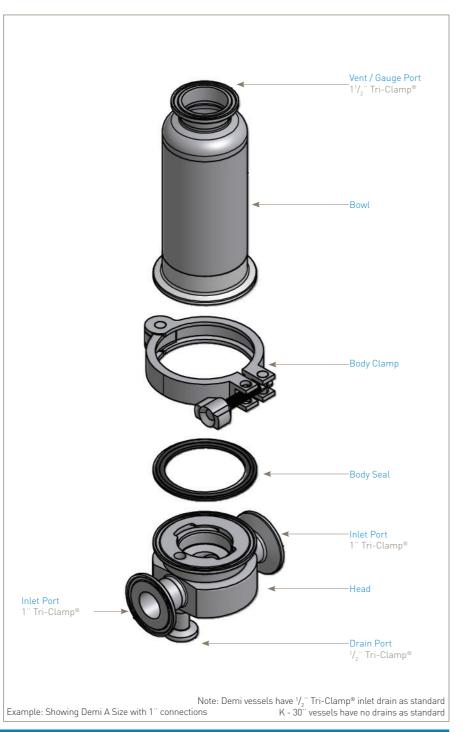




HSL Filter Housings Sanitary Liquid

STANDARD Range - 10" to 30"




Note: No drain(s) as standard.

STANDARD Range - Demi A & B




Note: 1/2" Tri-Clamp® inlet drain as standard.

PLUS Range - K to 40"

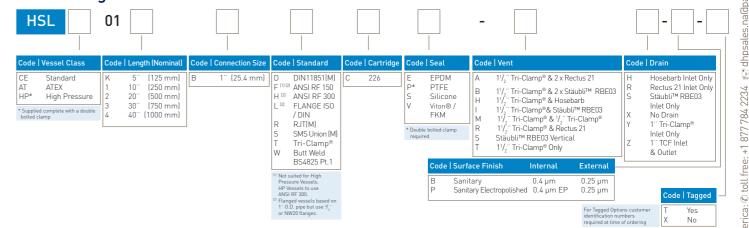

PLUS Range - Demi A & B

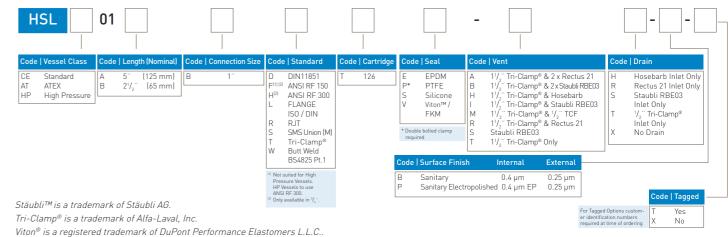

44 (0)191 4105121







- Multi-element sanitary liquid housing
- Designed specifically for the food and beverage industry
- High quality crevice free construction
- Available in 3 to 30 round versions
- Steam sterilizable

Specification

Materials of Construction

316L Stainless Steel I Housing: EPDM FDA Seals:

Surface Finish

Mechanically Polished Ra <0.8 μm Internal: External: Mechanically Polished

Steam Sterilization

Refer to Parker domnick hunter for individual housing parameters.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1

Custom Design

Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.

Note: For 12, 18, 24 and 30 Round options, please contact Parker domnick hunter for detailed technical drawings.

Fluid Group	State	Temperature	031	032	033	034
Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C [302 °F]	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	6.8 barg (99 psig)	3.9 barg (57 psig)	2.8 barg (41 psig)	2.1 barg (30.5 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
	Volume (litre	es)	7.3	12.6	17.8	23.1
Fluid Group	State	Temperature	051	052	053	054
Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	4.5 barg (65 psig)	2.4 barg (35 psig)	1.7 barg (25 psig)	1.3 barg (19 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	9.9 barg (144 psig)	6.8 barg (99 psig)	5.2 barg (75 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	6.8 barg (99 psig)	5.2 barg (75 psig)
	Volume (litre	es)	11.0	20.0	29.1	38.2
Fluid Group	State	Temperature	081	082	083	084
Dangerous	Liquid	0 - 40 °C [0 - 104 °F]	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Dangerous	Liquid	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	2.3 barg (33 psig)	1.4 barg (20 psig)	1 barg (14.5 psig)	0.7 barg (10 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)	10 barg (145 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)	7.5 barg (109 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	9.4 barg (136 psig)	5.6 barg (81 psig)	4.0 barg (58 psig)	3.1 barg (45 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.5 barg (109 psig)	5.6 barg (81 psig)	4.0 barg (58 psig)	3.1 barg (45 psig)
	Volume (litre	es)	21.3	35.3	49.7	63.9
PED Co	onformity Assessi	ment Category	CATI	CATI	CAT I	CAT I





Filter Housings Beverage

Physical Characteristics


Туре	Dim 'A'	ensions ('B'	,C, ww)	Typical Weight	
10" (250 mm)	606	840	290	27.0	
20" (500 mm)	606	1060	540	30.0	
30" [750 mm]	606	1310	790	33.0	
40" [1000 mm]	606	1560	1040	36.0	

Dimensions shown are for an 8 Round VSH, DN40 DIN2633 inlet outlet connections. For the full range of dimensions and weights,

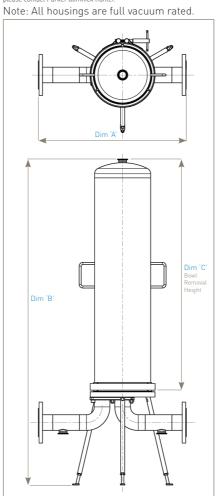

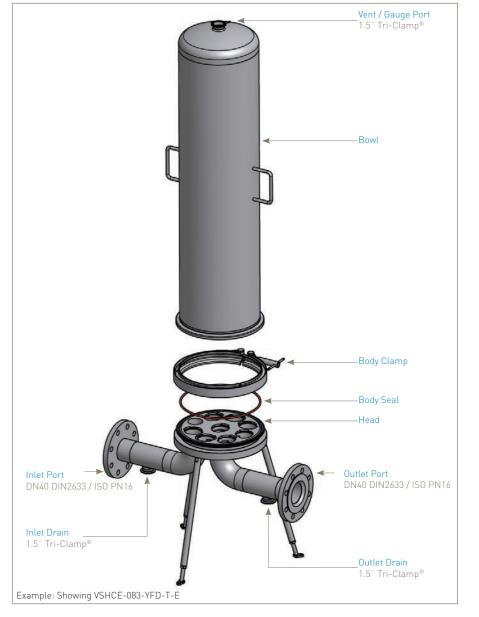

Ordering Information

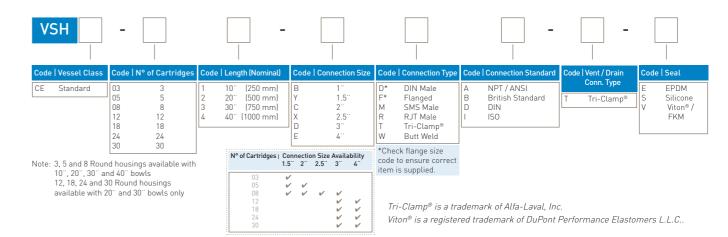

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sales.

HBA Filter Housings

Air / Gas Filtration





- Flow efficient range of air / gas housings
- Demi (TRUESEAL) and K-40" (226) housing sizes
- Designed to maximize flow and minimize pressure drop
- Designed specifically for the food and beverage industry
- STANDARD product
- Economy and short delivery lead times
- PLUS product
- Available in 4 different vessel classes:
 Standard CE, Atex, High Pressure and Oxygen
 Service
- Standard, sanitary and sanitary electropolished surface finishes available
- A number of inlet / outlet port connections
- Wide range of vent and drain options

Specification

STANDARD Range Materials of Construction

Housing: 316L Stainless Steel
 Seals: Silicone FDA
 Vent / Drain Seals: PTFE FDA
 Clamps: 304 Stainless Steel

Standard Surface Finish
Internal: As welded

■ External: Polished 0.8 µm Ra (32 µln Ra)

All finishes pickled and passivated.

PLUS Range Materials of Construction

Housing: 316L Stainless Steel
 Body Seals: Viton® / FKM FDA

EPDM FDA
PTFE FDA
Silicone FDA

Clamps: 304 Stainless Steel

Surface Finish

Parker domnick hunter's PLUS range of filter housings are available in a wide range of surface finishes and options. Please see product coding.

Velding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate.

Material Test Certification

EN10204 3.1 supplied upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.





STANDARD Range

Working Condition PED 97/23/EC			Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012		
Non Dangerous	Gas / Vapour	150 °C [302 °F]	10 barg (145 psig)						
Dangerous	Gas / Vapour	150 °C [302 °F]	10 barg (145 psig)	10 barg (145 psig)	5 barg (73 psig)	5 barg (73 psig)	5 barg (73 psig)		
PED 0	Conformity Assessn	nent Category	SEP	SEP	SEP	SEP	CAT I		
Volume (litres)			0.75	0.5	2.5	3.7	5.6		

PLUS Range

CE	Working Con	dition PED 97/23/EC		Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014	
Non Dangerous Dangerous	Gas / Vapour Gas / Vapour	150 °C (302 °F) 150 °C (302 °F)	10 barg (145 psig) 10 barg (145 psig)	10 barg (145 psig) 10 barg (145 psig)	10 barg (145 psig) 8 barg (116 psig)	10 barg (145 psig) 8 barg (116 psig)	10 barg (145 psig) 8 barg (116 psig)	10 barg (145 psig) 7 barg (102 psig)	10 barg (145 psig) 5 barg (73 psig)	
PED Confo	rmity Assessr	ment Category	SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I	
	Volume (litre	es)	0.75	0.5	2.5	3.7	5.6	7.5	9.4	

ATEX	Working Con	dition PED 97/23/EC		Maximum Pressure						
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014	
Non Dangerous Dangerous	Gas / Vapour Gas / Vapour	135 °C (275 °F) 135 °C (275 °F)	10 barg (145 psig) 8 barg (116 psig)	10 barg (145 psig) 7 barg (102 psig)	10 barg (145 psig) 5 barg (73 psig)					
PED Confo	rmity Assessi	ment Category	SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I	
	Volume (litre	es)	0.75	0.5	2.5	3.7	5.6	7.5	9.4	

High Pressure	Working Con	dition PED 97/23/EC	Maximum Pressure							
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014	
Non Dangerous	Gas / Vapour	205 °C [401 °F]	16 barg (232 psig)	16 barg [232 psig]	16 barg (232 psig)					
PED Confo	PED Conformity Assessment Category		SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I	
	Volume (litres)		0.75	0.5	2.5	3.7	5.6	7.5	9.4	

Oxygen Ser vice	e working con	uitioii i LD ///23/LC				Maximum Fres	Maxillulii F1655u16			
Fluid Group	State	Temperature	01A	01B	01K	011	012	013	014	
Dangerous	Gas / Vapour	150 °C (302 °F)	10 barg (145 psig)	10 barg (145 psig)	8 barg (116 psig)	8 barg (116 psig)	8 barg (116 psig)	6.6 barg (96 psig)	5.3 barg (77 psig)	
PED Conf	ormity Assess	ment Category	SEP	SEP	SEP	CAT I	CAT I	CAT I	CAT I	
	Volume (litr	es)	0.75	0.5	2.5	3.7	5.6	7.5	9.4	

Note: All housings are full vacuum rated.

North America: © toll free: +1 877 784 2234


HBA Filter Housings


Air / Gas Filtration

Physical Characteristics

В	owl Heig	jht	.A.	Typical Weight		
A Size	125 mm	(5")	175 mm (6.9")	258 mm [10.2"]	130 mm (5.1")	1.6 Kg (3.5lbs)
B Size	65 mm	[21/2"]	175 mm (6.9°°)	203 mm (8.0°)	70 mm (2.8)	1.5 Kg (3.3lbs)
K Size	125 mm	(5)	231 mm (9.1")	375 mm (14.8")	223 mm [8.8]	3.3 Kg (9.3 lbs)
10 in	250 mm	[10"]	231 mm (9.1")	525 mm (20.7)	342 mm (13.5)	3.9 Kg (8.6 lbs)
20 in	500 mm	[20"]	231 mm (9.1")	775 mm (30.5°)	590 mm (23.2)	4.9 Kg[10.8 lbs]
30 in	750 mm	(30)	231 mm (9.1")	1020 mm (40.2)	838 mm (33.0°°)	5.9 Kg (13 lbs)
40 in	1000 mm	[40"]	231 mm (9.1")	1270 mm (50°)	1068 mm (42.0)	6.9 Kg[15.2 lbs]

Dimensions shown are based on the STANDARD range. For accurate dimensions, please contact Parker domnick hunter

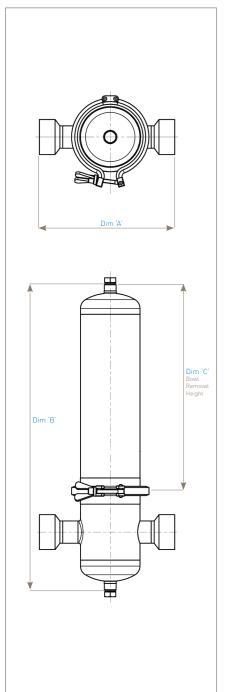


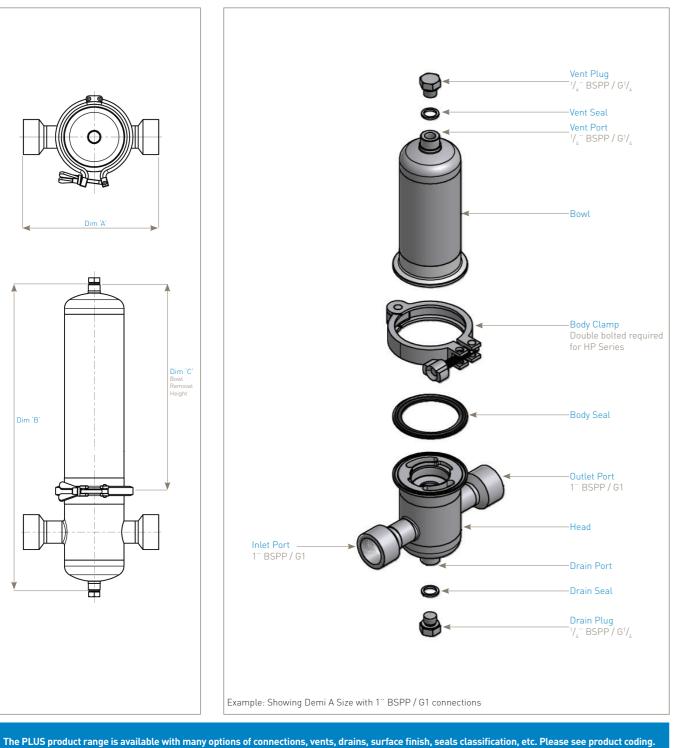






STANDARD Range - K to 20"




STANDARD Range - Demi A & B



PLUS Range - K to 40°

HBA

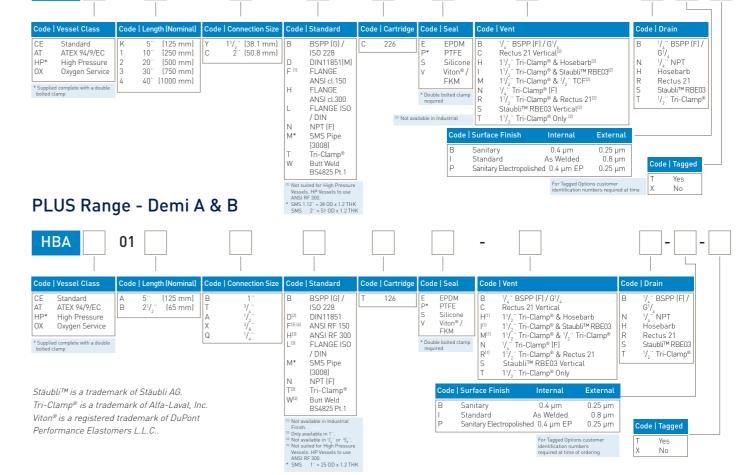

Note: All Tri-Clamp® connections conform to BS4825 Pt. 3

HPG Enhanced Plus Filter Housings

High pressure air / gas





- Flow efficient range of housings for sterile filtration higher pressure air and gases
- Standard, sanitary and sanitary electropolished surface finishes available
- A number of inlet / outlet port connections available
- Range of vent and drain options
- Two pressure ratings:
- 25 barg (363 psig) @ 130 °C (266 °F)
- Typical application CO2 and nitrogen sterile filtration
- Higher pressure steam to 16 barg (232 psig)
- 40 barg (580 psig) @ 130 °C (266 °F)
- Typical application PET bottle blowing
- Higher pressure steam to 32 barg (464 psig)
- Group 1 gases, solvents and vapours to 16 barg (232 psig)

Specification

Materials of Construction

Housing: 316L Stainless Steel Seals: EPDM FDA Silicone FDA

Viton™ / FKM FDA PTFE FDA

I Vent / Drain Seals: PTFE FDA

Standard Surface Finish

As welded Pickled and Passivated

■ External: Polished 0.8 µm Ra

Sanitary Surface Finish

I Internal: Polished 0.4 µm Ra Polished 0.25 µm Ra ■ External:

Sanitary Electropolished Finish

Electropolished 0.4 µm Ra Internal: Polished 0.25 µm Ra External

Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1

HPG25					Maximum	Pressure		
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Non Dangerous	Gas / Vapour	130 °C (266 °F)	25 barg (362 psig)					
iton Bungerous	Steam	204 °C (400 °F)	16 barg (232 psig)	16 barg (232 psig)	16 barg (232 psig)	16 barg [232 psig]	16 barg (232 psig)	16 barg (232 psig)
PED Co	nformity Assessr	nent Category	SEP	SEP	CATI	CATI	CATI	CATI
	Volume (litre	rs)	0.5	0.7	2.5	3.5	5.5	7.5
HPG40					Maximum	Proceuro		
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Non Dangerous	Gas / Vapour	130 °C (266 °F)	40 barg (580 psig)					
Non Bangerous	Steam	239 °C [462 °F]	32 barg (464 psig)					
PED Co	nformity Assessr	nent Category	SEP	SEP	CATI	CAT II	CAT II	CAT II
	Volume (litre	es)	0.5	0.7	2.5	3.5	5.5	7.5
HPG40					Maximum	Pressure		
Fluid Group	State	Temperature	01B	01A	01K	011	012	013
Dangerous Group 1	Gas / Vapour	130 °C [266 °F]	16 barg (232 psig)	16 barg (232 psig)	16 barg (232 psig)	16 barg (232 psig)	16.barg (232 psig)	16 barg (232 psig)
PED Co	nformity Assessr	nent Category	SEP	SEP	CAT I	CAT II	CAT II	CAT II
	Volume (litre	es)	0.5	0.7	2.5	3.5	5.5	7.5

Note: All housings are full vacuum rated.





HPG Enhanced Plus Filter Housings High pressure air / gas

Physical Characteristics


	Bowl leight	Dim 'A'	ensions 'B'	,C, (ww)	Typica Bowl	l Weigh Head	t (Kg) Total
B Size	(65 mm)	175	253	70	0.75	1.50	2.25
A Size	[125 mm]	175	308	130	1.00	1.50	2.50
K Size	[125 mm]	259	398	223	1.00	5.40	7.00
10"	(250 mm)	259	550	342	1.60	5.40	7.60
20"	(500 mm)	259	800	590	2.60	5.40	8.60
30	(750 mm)	259	1050	840	3.60	5.40	9.60

Dimensions shown are for a vessel with 1 1J_2 " BSPP / G 1 1J_2 , 1J_4 " BSPP / G 1 1J_4 vent and drain. For other formats, please contact Parker

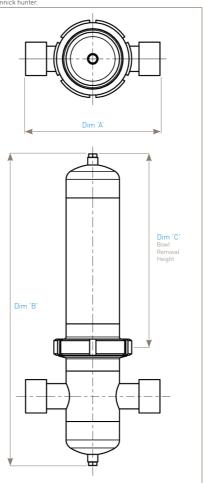

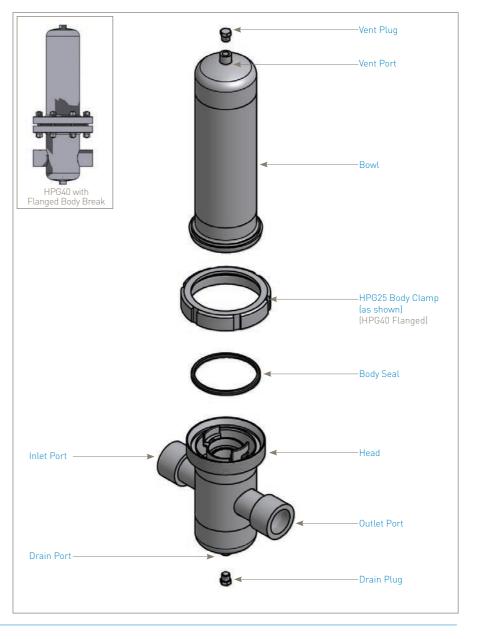

Ordering Information

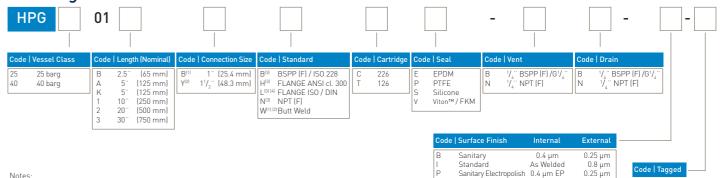

- 1. Demi A & B housings have 1" OD [Ø25.4 x 1.6 BS4825] connections only and TRUESEAL (Code T)
- cartridge, DIN Union body break.

 2. K 30" housings have 1.5" NPS Sch10s [Ø48.3 x 2.77 ANSI B36.19] connection and 226 (Code C) cartridges.
- Sanitary screwed and traditional flanges not considered sanitary.
 Flanged 'L' code connections as follows: HPG25 ISO DIN PN40
- 5. Viton™ is a registered trademark of DuPont Performance Elastomers L.L.C..

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sales.

HSV Filter Housings

Vent applications





- Direct connection to tank boss allows housing to be self-supportive
- Easy assembly and maintenance
- STANDARD product
- Standard surface finish and tri-clamp connection
- PLUS product
- Available as STANDARD or for Atex applications
- Standard, sanitary and sanitary electropolished surface finishes available
- Connection choices

(Also see HSVLP L-Port Datasheet)

Specification

STANDARD Range Materials of Construction

Housing: 316L Stainless Steel Silicone FDA Seals: Clamps 304 Stainless Steel

Surface Finish

I Internal: Polished 0.8 µm (32 µln Ra) | External:

All finishes pickled and passivated

PLUS Range

Materials of Construction

I Housing: 316L Stainless Steel EPDM FDA ■ Seals: Silicone FDA Viton® / FKM FDA

Note: Seal used only to position bowl clamp arrangement.

304 Stainless Steel Clamps:

Standard Surface Finish

Pickled and Passivated

External Polished 0.8 µm Ra (32 µln Ra)

Sanitary Finish

Polished 0.4 µm Ra (16 µln Ra) Internal: Polished 0.25 µm Ra (10 µln Ra) ■ External:

Sanitary Electropolished Finish

Polished 0.4 µm Ra (16 µln Ra) Internal: and Electropolished Polished 0.25 µm Ra (10 µln Ra) ■ External:

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish and detail drawings available upon request.

Certification

Supplied as standard with vessel inspection certificate

Material Test Certification

EN10204 3.1 supplied upon request.

Recommended Operation Guidelines

Sizing vent vessels particulary for vacuum sensitive tanks can require specialist advice. It is important that VENT housings are sized on maximum gas flow capacity under actual operation conditions.

Vacuum Protection


Where a tank is vacuum sensitive, there is a risk of tank collapse. In such cases the fitting of an appropriately rated bursting disc (or similar) and, if necessary a pressure relief valve, is highly recommended.






Physical Characteristics

Bowl Height	Dimensions (mm) 'A' 'B' 'C'	Typical Weight
A Size 125 mm [5"]	75 mm (2.9") 195 mm (7.7") 130 mm (5.1")	1.0 Kg [2.2lbs]
B Size 65 mm [21/2"]	75 mm (2.9") 140 mm (5.5") 70 mm (2.8")	0.9 Kg [1.9lbs]
125 mm (5)	132 mm (5.2") 242 mm (9.5") 194 mm (7.6")	2.2 Kg [4.8 lbs]
250 mm (10)	132 mm (5.2") 392 mm (15.4") 313 mm (12.3")	2.8 Kg (6.1 lbs)
500 mm (20)	132 mm (5.2") 642 mm (25.3") 561 mm (22.1")	3.8 Kg [8.3 lbs]
750 mm (30)	132 mm (5.2") 890 mm (35.0") 809 mm (31.8")	4.8 Kg(10.6 lbs)
1000 mm (40°)	132 mm (5.2") 1138 mm (44.8") 1057 mm (41.6")	5.8 Kg(12.8 lbs)

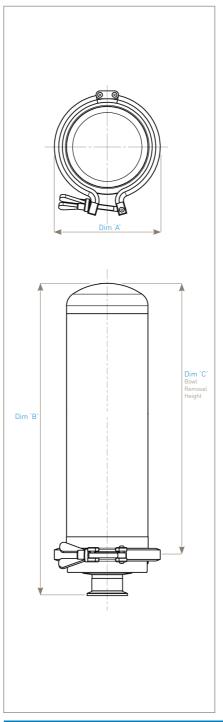

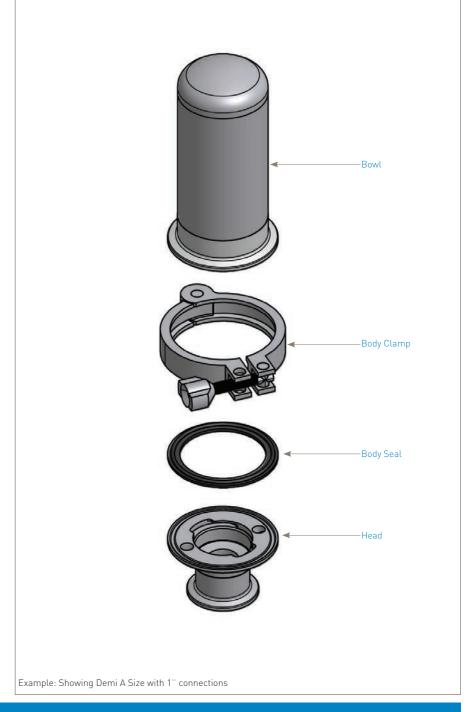

The PLUS product range is available with many options of connections, vents, drains, surface finish, seals classification, etc. Please see product coding.

Note: All housings are full vacuum rated









Vent applicaitions

M•F LTER


STANDARD Range - K to 20"




STANDARD Range - Demi A & B



PLUS Range - K to 40"

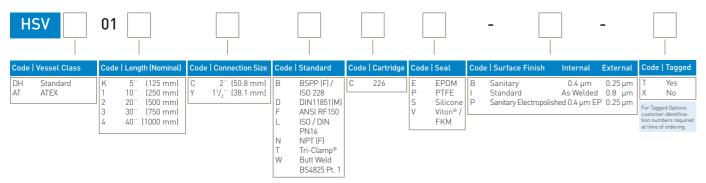

PLUS Range - Demi A & B

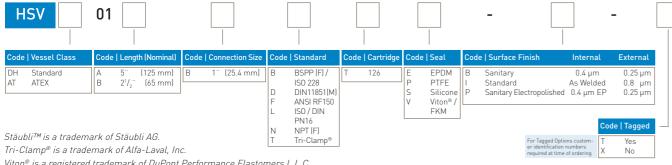

Viton® is a registered trademark of DuPont Performance Elastomers L.L.C..

Note: All Tri-Clamp® connections conform to BS4825 Pt. 3

DS_FBH_07_01/14 Rev. 1B

Hote. At The damp Connections connection to BS-4020 Ft. 0	
Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it atta alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for deta suitability for specific applications. All products are sold subject to the company's standard conditions of sale.	

VIS Filter Housings

High Flow Steam





- Specifically designed to maximize flow rates and minimize pressure drop
- Compatible with JUMBO element to maximize steam capacity

Specification

STANDARD Range Materials of Construction

I Housing: 316L Stainless SteelI Seals: EPDM FDA

Surface Finish

Internal: Inside of outlet and

distribution box to be mechanically polished 0.8 µm Ra. Pickled and Passivated.

External: Grit blast 5 µm Ra mean

Maximum Allowable Working Pressure (MAWP)

7 barg (101.5 psig)

Maximim Allowable Working Temperature (MAWT)

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001.

Design Basis

ASME VIII Division 1.







Physical Characteristics

Туре	Dim 'A'	ensions ('R'	,C, ww)	Typical Weight
VISCE-01J -DD	300	763	310	30.0
VISCE-01J -ED	330	895	140	50.0
VISCE-3J -DD	515	1049	410	100.0
VISCE-3J -ED	700	1237	490	


For the full range of dimensions and weights, please contact Parker domnick hunter.

Note: All housings are full vacuum rated.

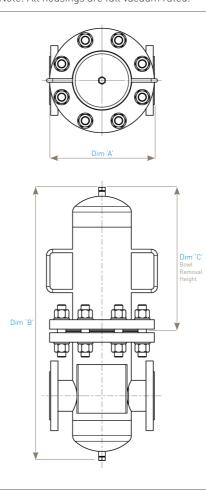

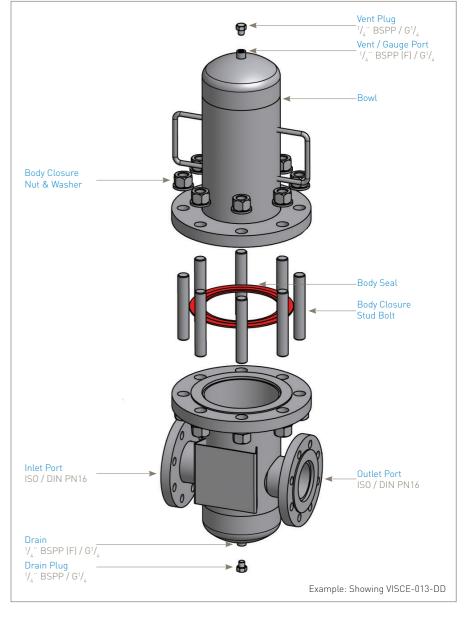

Ordering Information

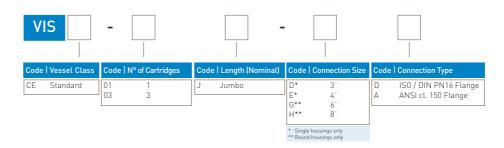

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's standard conditions of sale.

DS_FBH_08_01/14 Rev. 1B

End Cap styles




Cartridge End Caps

































Other end cap options are available




Vent autoclave filter End Caps and dimensions



V Style BSPP Thread & Gasket






End Cap cross reference chart

Parker domnick hunter	PA	MI	SA
В	MCY 10"	F	23
C (10" Size)	7	7	25
C (K Size)	2		
D	8	5	26
E/G	E = 3 / G = 25	0	27
F	MYS	8	24
L	MCY 20" and above	F	23
R			28
X			
Y	MCY2230		
Z	MCY2230 / 4463		

Cartridge dimensions

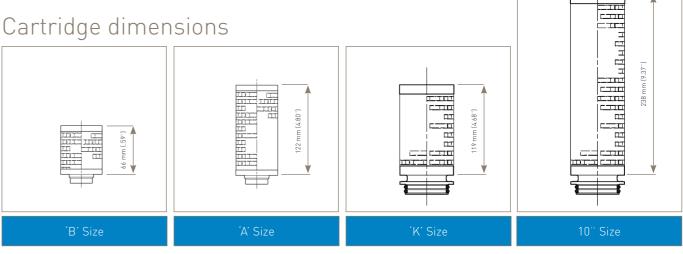

Conversion tables



Volume rate of flow

CONVERT					Multiplying	Factors				
FROM TO →	litre / sec	litre / hr	m³/sec	m³/hr	ft³/min	ft³/hr	UK gal / min	UK gal / hr	US gal / min	US gal / hr
↓ litre / sec	1.	3600.	0.001	3.6	2.118882	127.133	13.19814	791.8884	15.85032	951.019
litre / hr	0.000278	1.	0.00000028	0.001	0.000588	0.035315	0.003666	0.219969	0.004403	0.264172
m³ / sec	1000.	3 600 000.	1.	3600.	2118.88	127 133.	13 198.1	791 889.	15 850.3	951 019.
m³/hr	0.27778	1000.	0.000278	1.	0.588578	35.3415	3.66615	219.969	4.402863	264.1718
ft³/min	0.471947	1699.017	0.000472	1.699017	1.	60.	6.228833	373.730	7.480517	448.8310
ft³/hr	0.007866	28.3168	-	0.028317	0.01667	1.	0.103814	6.228833	0.124675	7.480517
UK gal / min	0.0757	272.766	0.0000758	0.272766	0.160544	9.63262	1.	60.	1.20095	72.05700
UK gal / hr	0.001263	4.54609	-	0.004546	0.002676	0.160544	0.016667	1.	0.020016	1.20095
US gal /min	0.063090	226.8	0.0000631	0.227125	7.4805	448.8	0.832674	49.96045	1.	60.
US gal / hr	0.001052	3.785411	-	0.003785	0.133681	0.133681	0.013878	0.832674	0.016667	1.

Pressure (liquid column, atmospheric, etc.)

CONVE	RT		Multiplying Factors											
FROM	T0 →	lb / in²	InH ₂ 0	ftH ₂ 0	inHg	atmos.	mmHg	mbar	kgf / cm²	N/m²	N / mm²			
lb / in²		1.	27.6799	2.30667	2.03602	0.068046	51.7149	68.9476	0.070307	6894.76	0.0068948			
InH ₂ 0		0.036127	1.	0.083333	0.073556	0.0024583	1.86832	2.49089	0.002540	249.089	0.0002491			
ftH ₂ O		0.433528	12.	1.	0.882671	0.029500	22.4198	29.8907	0.03048	2989.07	0.0029891			
inHg		0.491154	13.5951	1.13292	1.	0.033421	25.4	33.8639	0.034532	3386.39	0.003386			
atmos.		14.6959	406.781	33.8984	29.9213	1.	760.000	1013.25	1.03323	101 235.	0.101325			
mmHg		0.019337	0.535240	0.044603	0.03937	0.0013158	1.	1.33322	0.0013591	133.322	0.0001333			
mbar		0.014504	0.401463	0.033455	0.029530	0.0009869	0.750062	1.	0.0010197	100.	0.0001			
kgf / cm²		14.2233	393.700	32.8084	28.959	0.967841	735.559	980.655	1.	98 066.5	0.98066			
N / m²		0.000145	0.004015	0.0003345	0.0002953	0.000099	0.007501	0.01	0.0000102	1.	0.000001			
N / mm²		145.038	4014.63	334.553	295.300	9.86923	7500.62	10 000.	10.1972	1 000 000.	1.			

Mass

CONVERT		Multiplying Factors										
FROM TO→	grain	metric carat	gram	dram	drachm (apoth)	oz	oz tr or oz apoth					
↓ grain	1.	0.323995	0.064799	0.36571	0.016667	0.002286	0.002083					
metric carat	3.08647	1.	0.2	0.112877	0.51441	0.007055	0.006430					
gram	15.4324	5.	1.	0.564383	0.257206	0.035274	0.032151					
dram	27.34375	8.85923	1.77185	1.	0.455729	0.0625	0.056966					
drachm (apoth)	60.	19.4397	3.88793	2.19429	1.	0.137143	0.125					
0Z	437.5	141.748	28.3495	16.	7.29167	1.	0.911458					
oz tr or oz path	480.	155.517	31.1035	17.5543	8.	1.09714	1.					



Conversion tables

Mass

CONVERT	Multiplying Factors										
FROM TO →	↓		slug	US cwt	UK cwt	oz / US ton	tonne	UK ton			
↓ lb			0.031081	0.01	0.008929	0.0005	0.000454	0.000446			
kg	2.20462	1.	0.068522	0.022046	0.019684	0.001102	0.001	0.000984			
slug	32.1740	14.5939	1.	0.32174	0.287268	0.016087	0.014594	0.014363			
US cwt	100.	45.3592	3.10810	1.	0.892857	0.05	0.045359	0.044643			
UK cwt	112.	50.8023	3.481072	1.12	1.	0.056	0.050802	0.05			
oz / US ton	2000.	907.185	62.1620	20.	17.8571	1.	0.907185	0.892857			
tonne	2204.62	1000.	68.5218	22.0462	19.6841	1.10231	1.	0.984207			
UK ton	2240.	1016.05	69.62143	22.4	20.	1.12	1.01605	1.			

Volume and capacity

CONVE	RT		Multiplying Factors											
FROM	T0 →	cm³	in³	ft³	yd³	m³	litre	UK pint	UK gallon	US pint	US gallon			
cm ³		1.	0.061024	0.0000353	-	0.000001	0.001	0.001760	0.000220	0.002113	0.000264			
in³		16.3871	1.	0.0005787	0.0000214	0.0000164	0.016387	0.028837	0.003605	0.034632	0.004329			
ft³		28 316.8	1728.	1.	0.037037	0.028317	28.3168	49.8307	6.22883	59.8442	7.48052			
yd³		764 555.	46 656	27.	1.	0.764555	764.555	1345.429	168.1784	1615.793	201.9740			
m³		1 000 000.	61 023.7	35.3145	1.30795	1.	1000.	1759.75	219.969	2113.38	264.172			
litre		1000.	61.0237	0.035315	0.001308	0.001	1.	1.75975	0.219969	2.11338	0.264172			
UK pint		568.261	34.6774	0.020068	0.000743	0.0005683	0.568261	1.	0.125	1.20095	0.150119			
UK gallor	1	4 546.09	277.420	0.160544	0.005946	0.0045461	4.54609	8.	1.	9.60760	1.20095			
US pint		473.176	28.875	0.016710	0.000619	0.0004732	0.473176	0.832674	0.104084	1.	0.125			
US gallon	1	3 785.41	231.	0.133681	0.004951	0.0037854	3.785411	6.661392	0.832674	8.	1.			

Volume and capacity

CONVERT				Mult	iplying Factor	rs			
FROM TO →	UK minim	US minim	cm³	UK fl drachm	US fl drachm	UK fl ounce	US fl ounce	litre	in³
↓ UK minim	1.	0.960760	0.059194	0.016667	0.016013	0.002083	0.002002	0.0000592	0.0036122
US minim	1.04084	1.	0.061611	0.17348	0.01667	0.002168	0.002084	0.0000616	0.0037597
cm³	16.8936	16.2307	1.	0.281561	0.270519	0.035195	0.033814	0.001	0.061024
UK fl drachm	60.	57.64560	3.55163	1.	0.960760	0.125	0.120095	0.003552	0.216734
US fl drachm	62.45040	60.	3.696678	1.04084	1.	0.130105	0.125	0.003697	0.225585
UK fl ounce	480.	461.1648	28.4131	8.	7.68608	1.	0.960760	0.028413	1.73387
US fl ounce	499.604	480.	29.5735	8.32674	8.	1.04084	1.	0.029573	1.80469
litre	16 893.6	16 230.7	1000.	281.561	270.5125	35.1951	33.8140	1.	61.0237
in³	276.837	265.9739	16.3871	4.61395	4.432899	0.576744	0.554113	0.016387	1.

Installation and operating guidelines



For liquid and gas filter cartridges

Introduction

These guidelines give the correct methods for using liquid and gas filter cartridges manufactured by Parker domnick hunter. If you have any queries, our process filtration specialists will be pleased to discuss your particular filtration requirements or answer any questions you may have. We may also be contacted at any of the addresses given on the reverse of this document or through our worldwide network of subsidiary companies and distributors.

1. Storage

- 1.1 Store cartridges in a clean and dry environment and avoid placing heavy objects on the top of the cartridge tube or packaging. The cartridges should not be exposed to temperatures below 5 °C (41 °F) or above 40 °C (104 °F) or to direct sunlight.
- 1.2 Keep the cartridge in it's sealed polyethylene bag until it is time to install it.1.3 The shelf-life for cartridge filters is as
- 1.3 The shelf-life for cartridge filters is as follows:-
 - ASYPOR membrane variants 2 years Liquid membrane cartridges - 3 years
- Liquid depth cartridges 5 years
 TFTPOR membrane variants 5 years
- Gas membrane cartridges 5 years
- Gas depth cartridges 5 years 5 years
- Gamma irradiated cartridges Consult Certificate of Conformance
-

2. Installation

The various cartridge formats and end caps are shown on the end of this sheet, please refer to this if you are unsure which cartridge format you have.

- 2.1 New housings should be flushed out with clean water / air (dependant on the application) prior to installation of the cartridge to remove any debris. Ensure tie-rods / support plates are removed prior to flushing as vibration (especially in air) can cause components to loosen.
- 2.2 Before changing or installing a liquid or gas cartridge filter ensure that the filter vessel is depressurized and any liquid has been drained off. (Most vent filter cartridges are open to atmosphere but if the filter is connected to a pressurized line then ensure that the filter vessel is depressurized before removing the filter bowl).
- 2.3 Remove the filter bowl. For plastic housings the bowl is unscrewed and for stainless steel housings the bowl is held in place using a band clamp or a bolted flange.
- 2.4 Cut open the polyethylene bag at the cartridge open end and check that the o-ring seals or gaskets are clean, intact, correctly located in their grooves and not damaged.
- 2.5 Lubricate o-ring seals with a lubricant that is compatible with the process fluid (e.g. clean water) or use process liquid itself. Note: No lubricant should be used for oxygen applications.
- 2.6 Using the bag as protection and holding the cartridge as near as possible to the open end as opposed to the main body of the cartridge or the top end cap, press the

cartridge firmly into or onto the housing locations. Keep the cartridge vertical to prevent damage to the o-rings.

- a) If the vessel has a bayonet type cartridge location (A,C & R), slightly turn the cartridge clock-wise to locate the retaining lugs.
- b) For double open ended cartridges (B), take care to ensure that the cartridge gaskets on both the housing and cartridge are centred over the housing knife edge seals at both ends before closing the vessel.
- c) Cartridges with a threaded end cap (V) should be screwed in until the gasket is compressed.
- d) Threaded vent filters should be screwed into position until the flat gasket is compressed (BSPP) or the thread locks (NPT).
- 2.7 Remove the polyethylene bag from the cartridge(s) before the vessel is closed.
- 2.8 Some filter housings take more than one cartridge (multi-round) and they will have a support plate that locates on top of the cartridges and prevents movement and damage. Refer to the vessel instructions for the way that this plate is secured and ensure that it is always installed before the vessel bowl is located.

3. Operation (liquid cartridges)

Filter cartridges should not be subjected to excessive hydraulic shock and should never be reverse pressurized from the downstream to the upstream side (inside to out).

- 3.1 Slowly open the upstream valve and allow liquid into the filter vessel.
- 3.2 The vent valve located at the top of the vessel should be cracked open to allow air to escape and to ensure that the filter vessel is full of liquid. The vent valve should be closed when liquid starts to exit the valve.

N.B. If hazardous liquids are being filtered, please ensure that vent and drain valves are connected to a suitable drain line.

3.3 Slowly open the downstream valve and allow the filtered liquid to flow. It is recommended that newly installed cartridges are briefly flushed to drain and remove an debris that may have been inadvertently generated during cartridge installation or to remove trace levels of surfactant that may be present in some filter media. Liquid cartridges are shown to be blocked when the differential pressure across the filter has significantly increased and / or the flow of liquid through them is reduced to an unacceptable level. If you do not have pressure gauges that indicate the differential pressure then please contact Parker domnick hunter or their representative

4. Operation (gas / vent cartridges)

Vent / Gas filter cartridges are hydrophobic and they will not operate effectively if they are covered in water or steam condensate. This can lead to tank collapse or cartridge deformation so please ensure that if vent filters do come into contact with water they are replaced

Gas cartridges are blocked when the differential pressure across the filter is high and/or the flow of gas through them is significantly reduced. In normal operation they should be changed at least annually.

5. Integrity testing

Some liquid and gas cartridges may be integrity tested by a number of manual or automatic methods. Please contact Parker domnick hunter or it's representative for further information on which method is most suitable for your application or refer to the appropriate product datasheet.

6. Hot water sanitization (Liquid hydrophilic cartridges)

Recirculate prefiltered water through the filter for 1 hour at 80 °C (176 °F), the maximum differential pressure across the filter should be no more than 0.3 bar (5 psi). Open all system outlet valves to sanitize the system thoroughly.

7. Steam sterilization

Please refer to the datasheets to find out if your cartridge filter and housing can be autoclaved or steamed in place [SIP] and the allowed maximum temperature. To minimize the risk of contamination to a sterile system the filter should be autoclaved or SIP'd immediately prior to use.

N.B. Plastic housings cannot be steam sterilized or autoclaved.

Steam-in-place (SIP)

It is important that both liquid and gas filter cartridges do not have bulk steam flowed through them during SIP because excessive differential presure can cause damage to the cartridge at high temperatures. It is also usual to filter the steam so that any dirt it carries does not block or damage the filter.

Vacuum autoclave sterilization

The cartridge should be installed in the housing, the vent / drain valves left open and the housing bowl left slightly open. Do not allow the cartridge to support the vessel base or allow the bowl to rest on the cartridge during autoclaving. The assembly should be autoclaved on a cycle with a slow exhaust. Where possible liquid cartridges should be flushed with clean water prior to autoclaving.

Parker domnick hunter has detailed guidelines for the sanitization and steam sterilization of liquid and gas filters so if you are unsure of the procedures please contact Parker domnick hunter or it's representative.

Disposa

All cartridge filters should be disposed of in a safe manner and in line with Health & Safety Guidelines.



Installation and Operating
Instructions for Liquid &
Gas Filter Cartridges

Manuel D'installation et D'utilisation
des Cartouches pour les Liquids
et les Gas

Installation und Bedienungsanleitung Für Filterelemente zur Flüssigkeitsund Gasfiltration

Instrucciones de Manejo e Instalación de los Cartuchos Filtrantes Para Liquidos y Gases





ENGINEERING YOUR SUCCESS.

Glossary of terms used in filtration (1)



Absolute pressure

Associated with gas systems. The absolute pressure is the total pressure exerted on a system equal to atmospheric pressure plus gauge pressure, for example 2 barg = 3 bar absolute.

Absolute rating

A definitive value given to a filter that represents the smallest particle size capable of being captured by the filter. Typically it refers to 100% retention at a particular micron rating. The assigning of micron ratings is however dependant on the test methodology used. e.g.: a sterile grade absolute rated liquid filter is assigned a 0.2 micron rating if it retains all microorganisms of a predetermined size it does not mean that the filter has 0.2 micron. pores. When selecting a filter for a particular application always refer to the methods and assumptions made for assigning the micron rating.

A measure of the amount of air that flows through a filter at a certain system pressure and pressure drop. This is typically expressed in normalized units i.e.: the relative flow rate at atmospheric pressure and is quoted for a clean unused filter. Always quote system pressures when sizing gas filters.

Aerosol integrity testing

A method specifically designed for sterile gas filters whereby aerosol in the most penetrating particle size (MPPS: 0.2-0.3 micron) is used as a non-destructive challenge to the filter to determine whether it is providing sterile gas. The test can be performed using an automated test instrument such as the Parker domnick hunter Valairdata 3.

A closed pressure vessel into which steam is introduced (typically at a temperature of 121 - 134 °C (250 - 273 °F)) to sterilize the contents.

Backwash

A reverse flow of liquid through a filter in order to flush out trapped solids.

Bacterial challenge

This refers to a live bacterial challenge of a filter in either the liquid or gas phase. The type of organism used for the test depends on the assigned micron rating of the filter. For example a 0.2 micron sterile grade liquid filter is challenged with the organism Brevundimonas diminuta (test method ASTM 838-05) while a 0.45 micron absolute rated liquid filter is challenged with a suspension of Serratia marcesens. In some cases for critical performance validation requirements it will be necessary to challenge the filter with bacteria in the actual process fluid being filtered.

A measure of a filter's efficiency based on the number of particles present in the influent (upstream) to those in the effluent (downstream). Efficiency is expressed as a BETA ratio and is calculated as follows:

Beta Ratio = Number of particles in the influent Number of particles in the effluent

Generally a Beta Ratio at 5000 is accepted by the industry as being an 'absolute' rating for media prefilters.

Cartridge or filter cartridge

A filtration or separation device usually supplied in a cylindrical format which locates easily and quickly into a filter housing.

Chemical compatibility

When selecting filter materials attention needs to be given to their compatibility to the fluid which is to be filtered. A filter (depending on application) needs to be assessed for reduction in performance in terms of material degradation, integrity, etc. as well as quantifying any extractables levels. It should be noted that the compatibility of a filter is dependent on the process conditions. General material compatibility databases assume limited temperature and exposure time. They also refer to just one chemical. In an actual process there could be a combination of chemicals, high differential pressure and high temperature which all could influence filter performance. General guidance on filter performance can be given from experience and in-house data but normally it is recommended that filter compatibility is tested in the process

This is the selective removal of particulate from a process fluid usually achieved through depth filtration. The degree of clarification is dependant on customer specification.

Colony forming unit (CFU)

The minimum number of cells on an agar plate which will give rise to a visible colony. This term is most commonly seen in the validation of sterile filters to a live bacterial challenge where the challenge and the number of organisms recovered is stated in CFU.

Coalescing

When small droplets of aerosolized liquid merge together to form larger droplets. This normally occurs in a depth filter as the process gas carrying the entrained liquid droplets passes through the filtration media. A coalescing filter such as the Parker domnick hunter OIL-X also flows from the inside of the cartridge to the outside so any coalesced liquid drains to the base of the filter and subsequently into the bottom of the filter

Colloids are molecules that have not coagulated together to form a precipitate but remain in liquid suspension. These molecules are very small in size and have a molecular charge that affects their affinity for other molecules and materials. The choice of filter type and design is of paramount importance for a colloidal system if premature blockage is to be avoided

Compaction

This can occur to a filtration medium when it is subjected to high differential pressures. The high forces on the filtration media (especially depth type) can lead to compression of the structure and subsequent changes in filtration characteristics.

The retained non filtered stream from a crossflow filter system.

Cross flow filtration


A filter characterized by the feed stream traveling parallel to instead of directly through the filtration medium. This has the advantage of minimizing the blockage of the membrane as the system is to some extent 'self cleaning'.

D

An area of pipework where there is potentially no flow and therefore stagnant conditions exists. It is extremely important to eliminate these if contamination issues are to be minimized.

A depth filter is characterized by the thickness of the filtration media as well as its structure. A depth filter is normally fibrous in nature and contaminant is retained through the depth of the filtration media rather than just the surface.

Diffusional interception



This is the dominant removal mechanism for the smallest particles captured by a filter in the gas phase Particles as small as 0.01 um exhibit great diffusional movement (Brownian Motion) which has the effect of increasing its nominal mean diameter to the filter. The efficiency of this capture mechanism decreases as the particle size increases.

Diffusional flow

A non-destructive integrity test method for membrane based filters. It involves wetting out every pore in the membrane structure with water or the process fluid or a low surface tension liquid in case of hydrophobic membrane. Compressed air is applied to the upstream side of the filter and gas diffuses through the wetted pores. This flow rate is either measured directly by mass flow meters or indirectly via measuring the drop in pressure on the upstream side of the filter.

Differential pressure

Differential pressure (dP) is the difference in the pressure measured upstream (influent) and downstream (effluent) of a filter. Particularly in liquid applications differential pressure will increase to a point where either filter damage or insufficient flow will result. The higher the differential pressure the higher the energy cost so it is important to balance the pressure drop requirements with the installation size and required lifetime to blockage. Units of measurement are bar and psi as opposed to barg and psig.

Glossary of terms used in filtration

Ε

Effective filtration area (EFA)

This is the area of filtration material available for filtration

Effluent

The fluid which has passed through a filter.

Extractables

When a filter is in contact with the process fluid, chemical components may leach from the materials of construction and deposited in the filtrate. The levels of non-volatile extractables for a limited number of fluids are guoted in the filter validation guide. The level of extractables is dependent on the process conditions. Filtration of solvents, high temperature fluids and steam sterilization are three areas where extractables can

Filter (noun) / filter cartridge / cartridge An apparatus which performs filtration.

Filter (verb)

To pass a fluid or gas through a porous medium in order to remove solid particles.

Filter efficiency

Filter efficiency is a measure of the percentage of particles that are removed from the fluid by the filter. Typically these are given in terms of the % removal for a certain size of particle. A filter efficiency may also be given across a range of particle sizes . For a number of gas applications the efficiency of a filter may be guoted in relation to the filters ability to remove particles at the most penetrating particle size (MPPS) of 0.2-0.3 micron. Always ensure filter efficiency is matched to the requirements of the process.

Filterability indices (FI) and Vmax

This is an indication of a filters capacity to process certain fluids. It generally gives a measure of the rate of blockage of a filter as well as the theoretical maximum throughput. The time required to flow two consecutive 200 ml fluid samples is recorded and the filterability indices are calculated from the results. The two formulae used are as follows:

$$(Vmax) = \frac{400 + 4007}{(T_2 - 2T_1)}$$

 T_1 = Time to filter first 200 ml

 T_2 = Time to filter second 200 ml

It should be noted that these methods give a general indication of performance and are often more useful in comparative performance measurement between different filter types.

 $= (T_2 - 2T_1)$

Filtrate

Another name for effluent

Filter sterilization

Sterilization is the act of making an organism barren or infertile (unable to reproduce). The sterilization of a filter can be achieved by a number of methods including dry heat, steam, ethylene oxide, hydrogen peroxide or irradiation The method chosen depends on the process and the materials of construction of the filter but by far the most widely used is that of steam, either in an autoclave or via steam-in-place (SIP)

The rate of fluid flow (gas or liquid) when expressed in terms of flow per unit area of the filter that removes the contaminants from the fluid stream. It can apply to both depth and membrane media.

G

Gauge pressure

The pressure of a system measured by a gauge, which excludes atmospheric pressure, for example 1 bar atmosphere (or 1 bar absolute) = 0 barg.

Housing


An enclosure for a filter element, typically rated for pressure, that directs the fluid through the filter.

Hydrophilic

Hydrophilicity is the ability of a filtration media to 'wet out', that is, for the porous structure to be completed filled with the liquid being filtered. This is an important characteristic as incomplete wetting of the structure can lead to a reduction in flow capacity and problems with integrity testing. All liquid filters are 'hydrophilic' apart from those that may have been selected for use with aggressive solvents. These filters are typically based on a fluoropolymer and their structure needs to be wetted with a low surface tension liquid such as isopropyl alcohol. Once the structure has been wet, the filter will process aqueous solutions without a problem.

Inertial impaction

This is a removal mechanism for particles captured by a filter in the gas phase. The particles follow the streamlines of gas between the filter fibres and membrane pores. Due to their mass the inertia of the particle will cause it to move out of the streamline and attach itself to a fibre or pore wall. The effect of this capture mechanism increases with particle size / mass.



Influent

The fluid entering the filter system.

In an unnatural position e.g. outside the body "In vitro" is Latin for "in glass" an experiment performed without the involvement of a whole, living organism.

The testing of a substance or experimentation in or using a living, whole organism

Log reduction value (LRV)

This is a measurement of a filters removal. efficiency for a specific contaminant. It is normally associated with the bacterial retention of a filter.

Log₁₀ Number of bacteria in the influent Number of bacteria in the effluent

e.g.
$$\left\{ Log_{10} \ \frac{1 \times 10^{10}}{1} \right\} = LRV \text{ of } > 10$$

It is always expressed as > (greater than) as 1 has to be used for the effluent even if there are no organisms present. This can also be expressed as a 10 log reduction or a titre reduction of 1010.

M

Medium (Media)

This is the component of the filter that removes the contaminants from the fluid stream. Also commonly referring to depth - type materials, in its more generic sense a filter medium / media can refer to either depth or membrane filter materials.

Microfiltration

Microfiltration is the process of removing particles from a liquid or gas by passing it through a porous medium. It generally involves removing particles between the sizes of 10 and 0.04 micron in liquids, and down to 0.01 micron in gases.

Micron (micrometer)

Designated by the Greek letter μ a micron is 10- 3 mm (millimeters) or 10 4 (Angstroms) or 0.00003937 inch. For a perspective on this size a human hair is approximately 70 microns thick and the limit of resolution of the naked eye is around 40 microns.

A membrane is a thin, porous film typically between 30 and 150 micron in thickness. It has of tens of millions of pores / cm² through which the process fluid runs. The nature of the pore structure is determined by the manufacturing method. Solvent cast membranes such as Polyethersulphone (PES) and Mixed Esters of Cellulose (MEC) have a defined pore structure which can be asymmetric whilst membrane such as Polytetrafluoroethylene (PTFE) which is manufactured by 'stretching' have a fibrous appearance and a less defined pore structure.

Nanofiltration

Filtration that removes both particles and small dissolved molecules and ions. Finer than ultrafiltration not as fine as Reverse Osmosis

Nanometer

A nanometer is 10-9 meters

Nominal filter rating This rating is often quoted within the filtration

industry but great care should be taken in ensuring the efficiency and test methodologies are completely understood. A 5 micron nominal filter could be 99% retentive at 5 micron, another could be 80%. It can be very misleading to compare the performance of filters on nominal ratings. When selecting a filter the duty required should be

Glossary of terms used in filtration (1)



compared to the individual performance characteristics of filter. Parker domnick hunter has the experience to help select the most appropriate filter for the application

Oleophobic

Oleophobic membranes and depth media have the capability to repel fluids such as oil and lubricants. This phenomena is used in some of the new generation oil coalescing filters.

This refers to the degradation of materials in the presence of oxygen and high temperature. It is normally associated with high temperature gas systems where the combination of steam sterilization can lead to the onset of oxidation of polypropylene filtration components in as little as 3 months. For applications where continuous (1 year and above) exposure to high temperature is required the use of a special product with oxidation resistant filtration support materials such as the HIGH FLOW TETPOR H.T. is recommended.

Oxidation can also occur on filters used in ozonated water systems. In these instances careful selection of filter components is required.



Pleating

Filtration media can be pleated or corregated to maximize the filtration area. By pleating filtration media it is possible to fit a large EFA in a relatively small cartridge volume

Voids volume (porosity)

This is a measurement of the free space in a filtration media. The more free space the less the resistance to flow. Typical values for a membrane are in the region of 50 - 80% and for depth type media between 60 - 95%

Pressure decay

A non-destructive integrity test method for membrane based filters. It involves wetting out every pore in the membrane structure with water or the process fluid or a low surface tension liquid in case of hydrophobic membrane. Compressed air is applied to the upstream side of the filter and gas diffuses through the wetted pores. This causes a pressure drop in the upstream side of the filter known as the pressure decay. The maximum allowable pressure decay for a filter is dependent on the upstream volume and therefore must be

Pressure Decay (mbar /min) =

Diffusional Flow (ml / min) Upstream Vol (l)

Pyrogenicity is the tendency of a substance to raise body temperature when injected into the body. Filtration materials that come in contact with injectable liquids must meet pyrogenicity standards and be classified as non-pyrogenic. Pyrogenicity can be determined by such standard tests as the Limulus Amoebocyte Lysate (LAL) test

Synonymous with filtrate

Regeneration

When a filter becomes blocked with protein based material it may be possible to regenerate, or clean the filter, so improving overall lifetime.

The application of high pressure compressed gas to the inside of a filter to release powder collected on its surface.

Reverse osmosis

Forcing a liquid through a non-porous membrane, removing particles, along with dissolved molecules and ions. Reverse osmosis is the finest form of membrane separation and is used to desalinate water for drinking, and in the preparation of ultrapure water for various industries.

Sanitization

Reduction not elimination of a microbial population to render a fluid/system free from spoilage organisms and increase shelf-life of products.

Sedimentation

The process by which suspended solid particles in a liquid phase gravitate downwards. Eventually they will settle on the bottom of the holding tank, pipework etc. The rate of sedimentation is governed by particle mass and fluid velocity.


Separation is the process of dividing a fluid stream (either liquid or gas) into separate components. This can include separation of two phases (liquid from gas) separation of soluble impurities (known as purification) or solids from a fluid (filtration). The products of a separation can themselves be separated further in many cases.

Silt density index (SDI)

This is another measure of the rate of blockage and is typically used when the system is relatively clean and the difference between T_{400} and T_{200} (see Filterability Indices) is so small that large inaccuracies can occur. The SDI uses the time taken for two 500 ml samples of fluid to pass though a 47 mm diameter 0.45 µm disc. There is typically a 15 minute gap between the two samples being taken.

Size exclusion

This is a removal mechanism for particles captured by a filter in either the liquid or gas phase. It applies to particles that are physically too large to pass through the filter structure. The mechanism is not affected by flow rate unless pressure drops cause deformation of the particle



A solid which is dissolved in a solvent. For instance, the salt in salt water is a solute

Solvent

A liquid substance capable of dissolving other substances. The solvent does not change its state in forming a solution.

Stabilization

This is the reduction in microbial loading in a fluid system and is generally associated with the beverage industry where partial rather than complete removal of spoilage organisms may be required to extend shelf-life

In terms of filtration this means the elimination of all living microorganisms from the influent stream.

Surfactant

Acronym for a surface active agent. In filtration it is also sometimes called a wetting agent. If a filter is being used to filter aqueous solutions and incomplete wetting of the membrane pore structure is encountered a 'wetting agent' may be added to the membrane surface by flowing a quantity of surfactant through the filter. However, the use of a wetting agent is not desirable, especially in a pharmaceutical environment, as there is also the possibility of the surfactant leaching from the filter into the filtrate during processing or steam sterilization, etc.

Thermal stability

This is most important during sterilization of the filter. The majority of cartridge and disposable type filters are manufactured from polymers such as polypropylene and nylon. During sterilization the components of the filter expand and contract putting great strain on the device. The filter performance with respect to steam sterilization should be matched closely to the requirements of the process. It should be noted that some filter configurations cannot be in-situ steam sterilized but can only be autoclaved.

Titre reduction See LRV.

This is a measurement of the amount of suspended particles in a fluid and is effectively a clarity index. It is measured in NTU (Nephelometric Turbidity Units).



Glossary of terms used in filtration

U

The release of contaminants which had initially been captured by a filter. This is most likely to occur in filtration systems with are subjected to high pressure pulses such as high capacity filling

Ultrafiltration

Filtration of a liquid that separates suspended or dissolved substances based on their molecular weight or size. Ultrafiltration generally refers to separating everything larger than a large molecule. Compare to microfiltration, nanofiltration, reverse osmosis.



Viscosity is a measurement of the resistance to flow of a fluid. The more viscous the fluid, the greater the time required to filter. Viscosity will in general reduce with an increase in temperature. This is why very viscous solutions such as glucose are heated prior to filtration.

See Filterability Indices.

Water flow

Measure of the amount of water that flows through a filter. Related to the degree of contamination. differential pressure, total porosity, and filter area [ASTM:F317-72]. Expressed in the membrane industry in units of milliliters / minute / square centimetre.

Water Intrusion

A non-destructive integrity test method specifically designed for hydrophobic filters. It involves filling the upstream volume of a filter housing with water and applying a pressure, typically in the order 2.5 barg. As the membrane is hydrophobic the bulk water will not pass through. However, due to the difference in pressure between the upstream and downstream side of the filter there is a net loss of water from the upstream side due to evaporation and the slight penetration of water into the pore structure. This loss of water results in a pressure drop which is displayed as either a water intrusion value or a water flow value. The water intrusion is the measure of the increase in compressible gas volume expressed at atmospheric pressure and the water flow equates to the volume of water lost from

Water flow = Water Intrusion / Absolute test pressure.

Additional Support



Food and Beverage

Catalogue

The complete food and beverage product portfolio

Wine

www.parker.com/dhwine

Product Selection Guide

Wine Industry Overview Guide

Application Note: Standardization of wine for tanker loading / off-loading

Brewing

MANAN parker com/dbbee

Product Selection Guide

Brewing Industry Overview Guide

Application Note: Successful powder trap filtration of beer

Application Note: Cold stabilization of ale

Bottled Water

www.parker.com/dhbottledwate

Product Selection Guide

Bottled Water Industry Overview Guide

Application Note: Effective microfiltration of bottled water

Beverage

vww.parker.com/dhbeverag

Beverage Industry Overview Guide

Application Note: Removal of yeast from carbon dioxide recovered

from fermentation

Application Note: Microfiltration in the production of carbonated drinks

Integrity Testing

www.parker.com/dhbeverag

Valairdata 3 Brochure

Application Note: Assuring the performance of sterile gas filtration in drinks packaging

The **NEW** Valairdata 3 demonstration video



Protecting quality and taste for 50 years

With the ever-increasing choice of cold beverages, the emphasis on the majority of volume produced is to provide consumers with a fresh tasting, visually brilliant product. Whether producing premium varieties or own-label supermarket brands, quality specifications are increasing to reflect consumer needs and the extended shelf-life requirements for products that travel further afield.

Since 1963, Parker domnick hunter has partnered with beverage producers to meet their changing needs. Through a structured application-led approach, we can provide options for various levels of clarity and microbiological stability throughout the production process, whilst demonstrating proven cost reductions through operational efficiencies and filter design. Quality, economy and continuing process optimisation are our ongoing commitments.

www.parker.com/dhbeverage

North America:

toll free: +1 877 784 2234 email: dhpsales.na@parker.com

Europe:

phone: +44 (0)191 4105121 email: dhprocess@parker.com

ENGINEERING YOUR SUCCESS.



